


SWIFT UP 4.5 SP

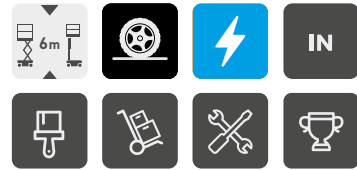

TINY MACHINE, HIGH PRODUCTIVITY

- > Ultra compact design: fit through single doors, elevators...
- > Narrow turning radius to fit with confined spaces constraint
- > Lightweight to work on sensitive grounds or in multi-story projects

LOW SIZE, HIGH AGILITY

- > Small platform to work in tiny spaces
- > Heavy tools and material transportable at once: platform capacity up to 240 kg
- > Self propelled driveable at full height for easy repositioning
- > Access ramps up to 25%

LOW MAINTENANCE, EASY TO USE

- > No set up time, the machine is ready to use
- > Maintenance free battery




LOW LEVEL ACCESS

TECHNICAL DATA

SWIFT UP 4.5 SP

Working height	4.5 m
Platform height	2.5 m
Lift capacity	240 kg (1 pers.)
Platform size	1.04 m x 0.57 m
A Length	1.2 m
B Width	0.7 m
C Height - stowed	1.8 m
D Wheel base	0.91 m
E Ground clearance	5 cm
Motion	Self-Propelled - Electric
Turning radius - Inside	0 m
Turning radius - Outside	0.99 m
Tilt	1.5 °
Gradeability	25 %
Tyres size (front / back)	150mm x 48mm / 230mm x 80mm
Battery	2x12V DC - AGM
Weight	430 kg

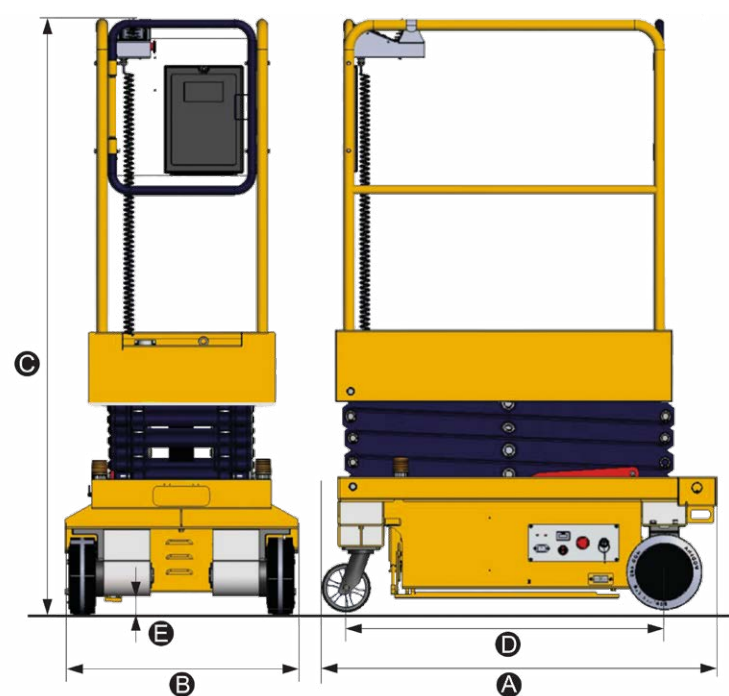

STANDARD EQUIPMENT

- > Electrically driven lifting
- > Electrically driven motion thanks to the 2 drive wheels
- > Maintenance free AGM battery
- > Battery charger > 12 Ah
- > Battery level indicator on upper control box
- > Emergency lowering descent
- > 2 front castor wheels
- > Automatic wheel lock
- > Swing door
- > Mobile upper control box
- > Charger plug with dedicated storage box
- > Motion flashing light
- > Horn
- > Motion alarm
- > Tilt indicator on lower control box
- > Hour meter
- > Forklift pockets

SWIFT UP 4.5 SP

