


Residential, $q_k=2.0 \text{ kN/m}^2$, $l=6 \text{ m}$ - best total GWP cross-sections


Concrete
 Rebar
 Post-tensioning
 Timber
 Cement screed
 Insulation
 Gravel

Rectangular concrete




conventionally reinforced
 Static system: 2-way, full continuity, walls
 Rebar bottom/top: 14 / 14 / 9 / 9 mm
 Concrete: C20/25 (23) | Rebar: B500B (38)
 Floor build-up: Insulation 3 MN/m²: 30 mm | Cement screed: 60 mm | Parquet: 11 mm

Rectangular concrete PT dist.




post-tensioned, distributed layout
 Static system: 2-way, full continuity, walls
 Rebar bottom/top: 12 / 12 / 12 / 12 mm
 Concrete: C25/30 (24) | Rebar: B500B (38) | PT: Y1860 (121)
 Floor build-up: Insulation 3 MN/m²: 30 mm | Cement screed: 60 mm | Parquet: 11 mm

Rectangular wood

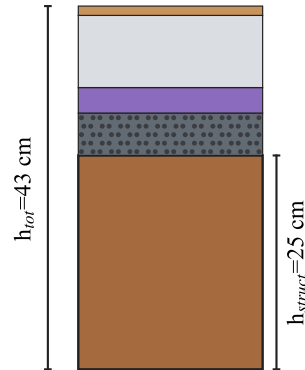


BSH
 Static system: Simple span
 Timber: GL24h (88)
 Floor build-up: Gravel: 50 mm | Insulation 3 MN/m²: 30 mm | Cement screed: 85 mm | Parquet: 11 mm

TCC flat, kerve




BSH, connection: kerve, $s=0.5 \text{ m}$
 Static system: Simple span
 Rebar centre: 10 / 10 mm
 Concrete: C20/25 (23) | Rebar: B500B (38) | Timber: GL24h (88) | Connector: kerve
 Floor build-up: Insulation 3 MN/m²: 30 mm | Cement screed: 85 mm | Parquet: 11 mm

TCC ribs, DBS

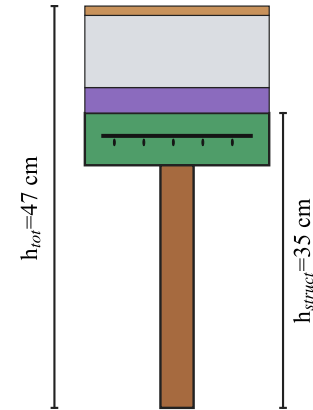

Ribs, connection: DBS_10, $s=0.15 \text{ m}$, $a_{\text{ribs}}=0.625 \text{ m}$, $b_w=0.18 \text{ m}$
 Static system: Simple span
 Rebar centre: 10 / 10 mm
 Concrete: C20/25 (23) | Rebar: B500B (38) | Timber: GL24h (88) | Connector: DBS_10
 Floor build-up: Insulation 3 MN/m²: 30 mm | Cement screed: 85 mm | Parquet: 11 mm

Ribbed timber hollow core

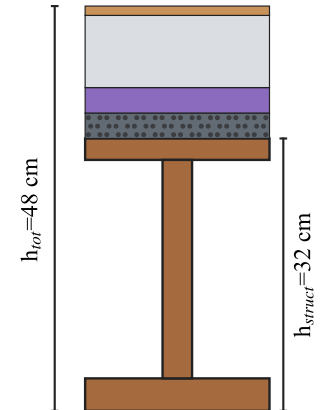

Hollow core
 Static system: Simple span
 Timber: GL24h (88) | Timber: C24 (80) | Timber: C24 (80)
 Floor build-up: Gravel: 30 mm | Insulation 3 MN/m²: 30 mm | Cement screed: 85 mm | Parquet: 11 mm