
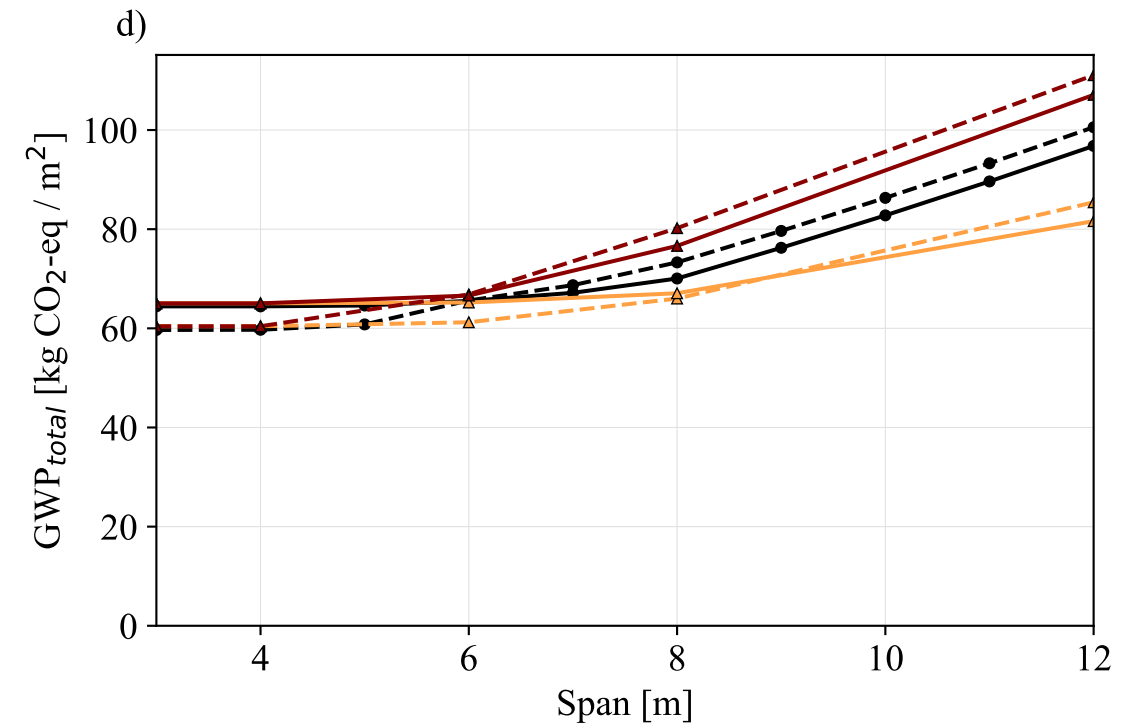
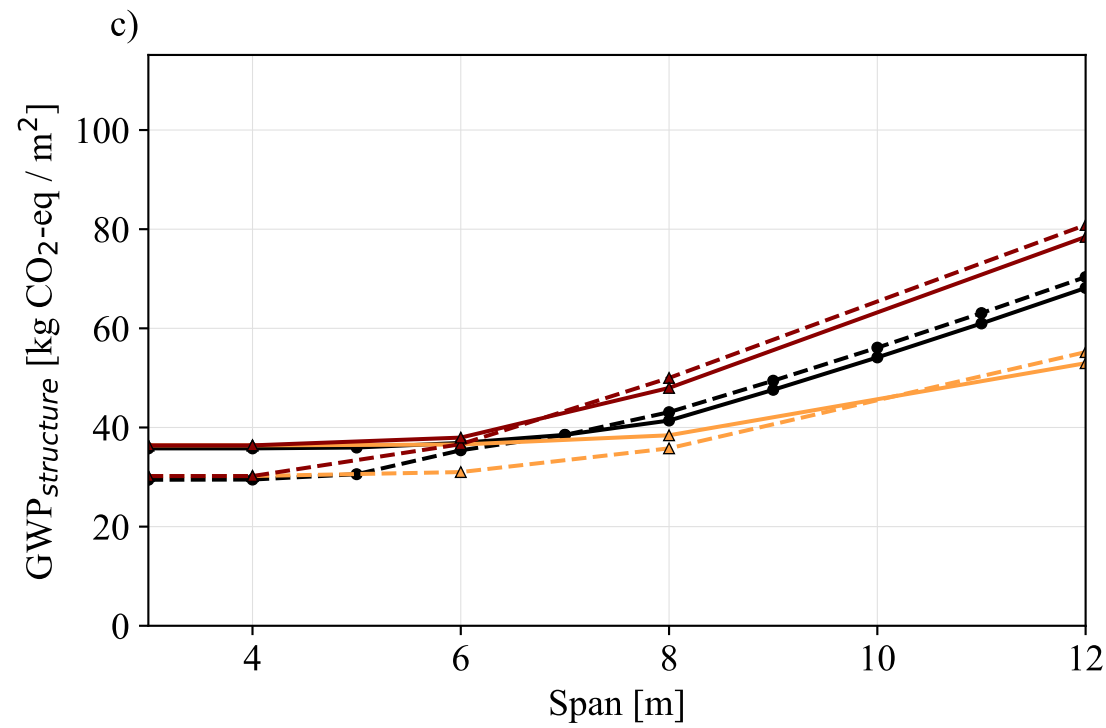
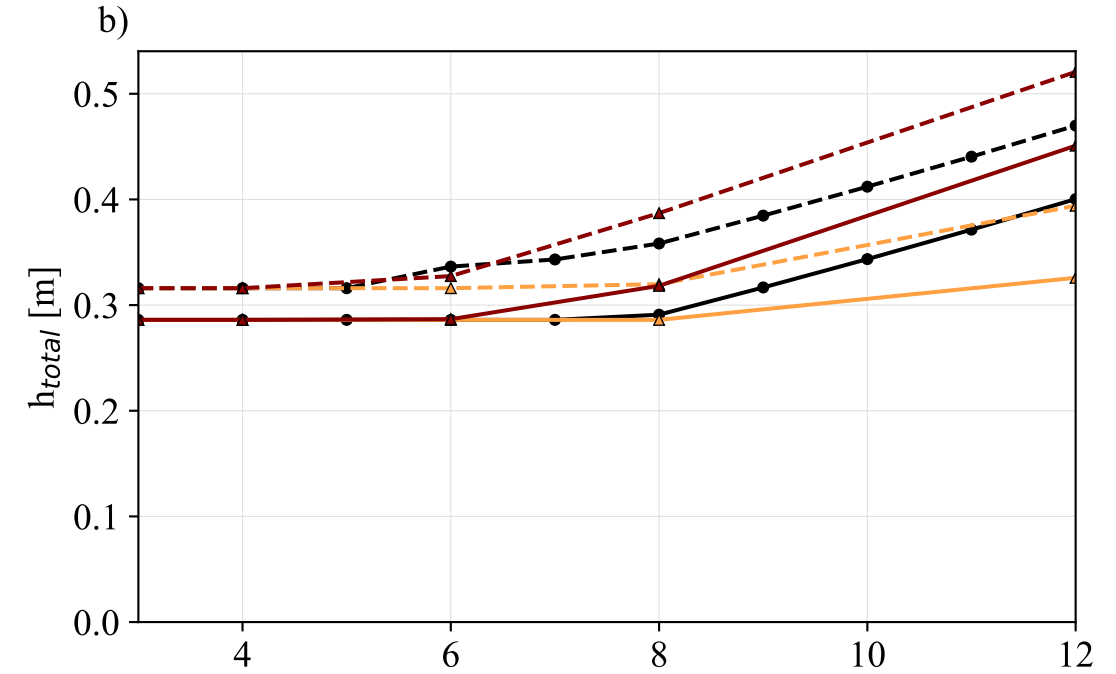


Plattensysteme vs. Durchlaufträger (3-12m)

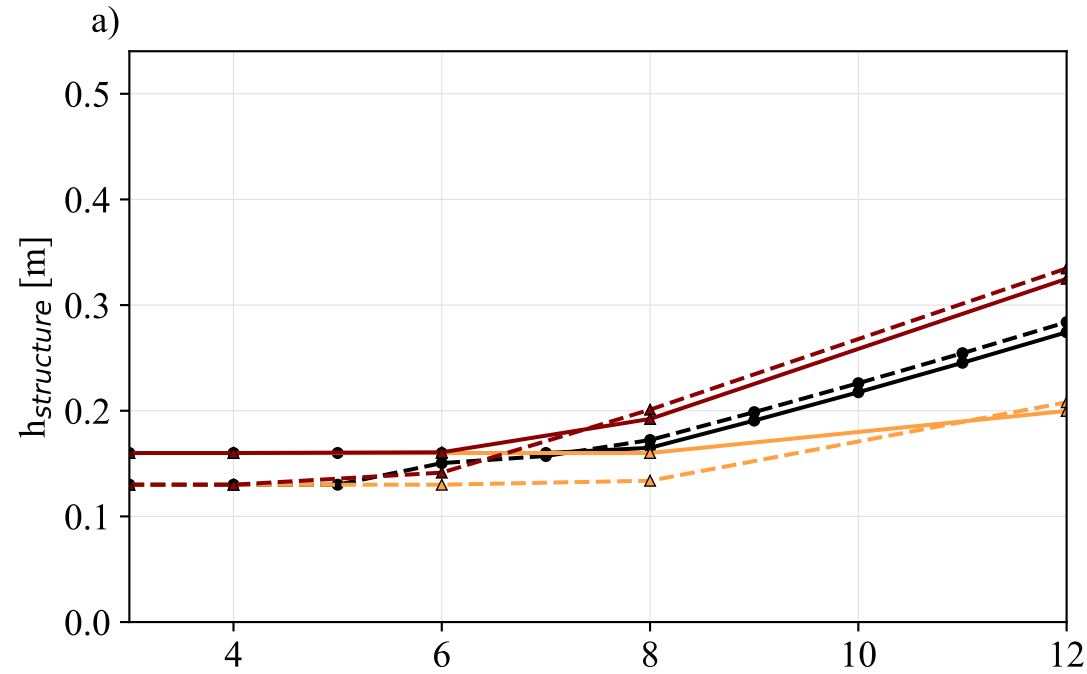

- | | | | | | |
|---------|--|---------|---|---------|---|
| —●— | Solid slab, single-axis load-bearing, continuous (standard superstructure) | —▲— | Solid slab, two-axis load-bearing, continuous (standard superstructure) | —▲— | Solid slab, two-axis load-bearing, simply supported (standard superstructure) |
| - -●- - | Solid slab, single-axis load-bearing, continuous (standard superstructure + filling) | - -▲- - | Solid slab, two-axis load-bearing, continuous (standard superstructure + filling) | - -▲- - | Solid slab, two-axis load-bearing, simply supported (standard superstructure + filling) |