

Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP

- segment structure
- reliable data transfer
- flow control
- connection management

3.6 principles of congestion control

3.7 TCP congestion control


TCP flow control

application may
remove data from
TCP socket buffers


... slower than TCP
receiver is delivering
(sender is sending)

flow control

receiver controls sender, so
sender won't overflow
receiver's buffer by transmitting
too much, too fast

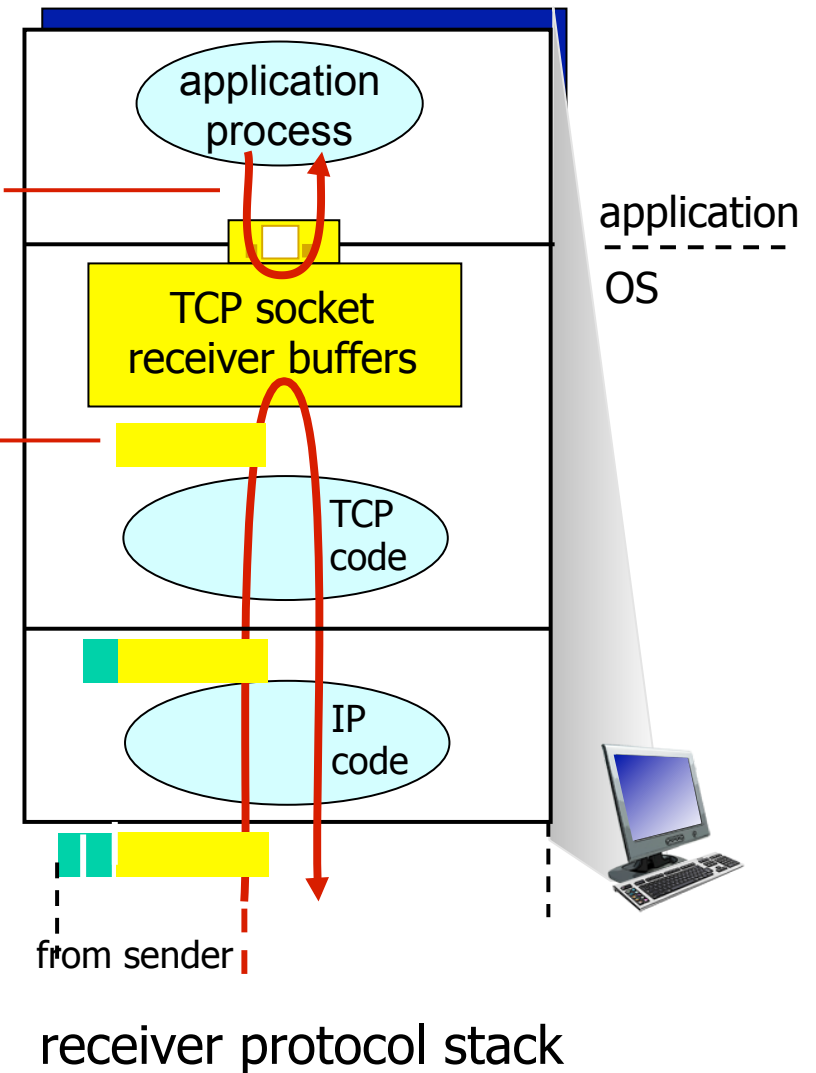

TCP segment structure

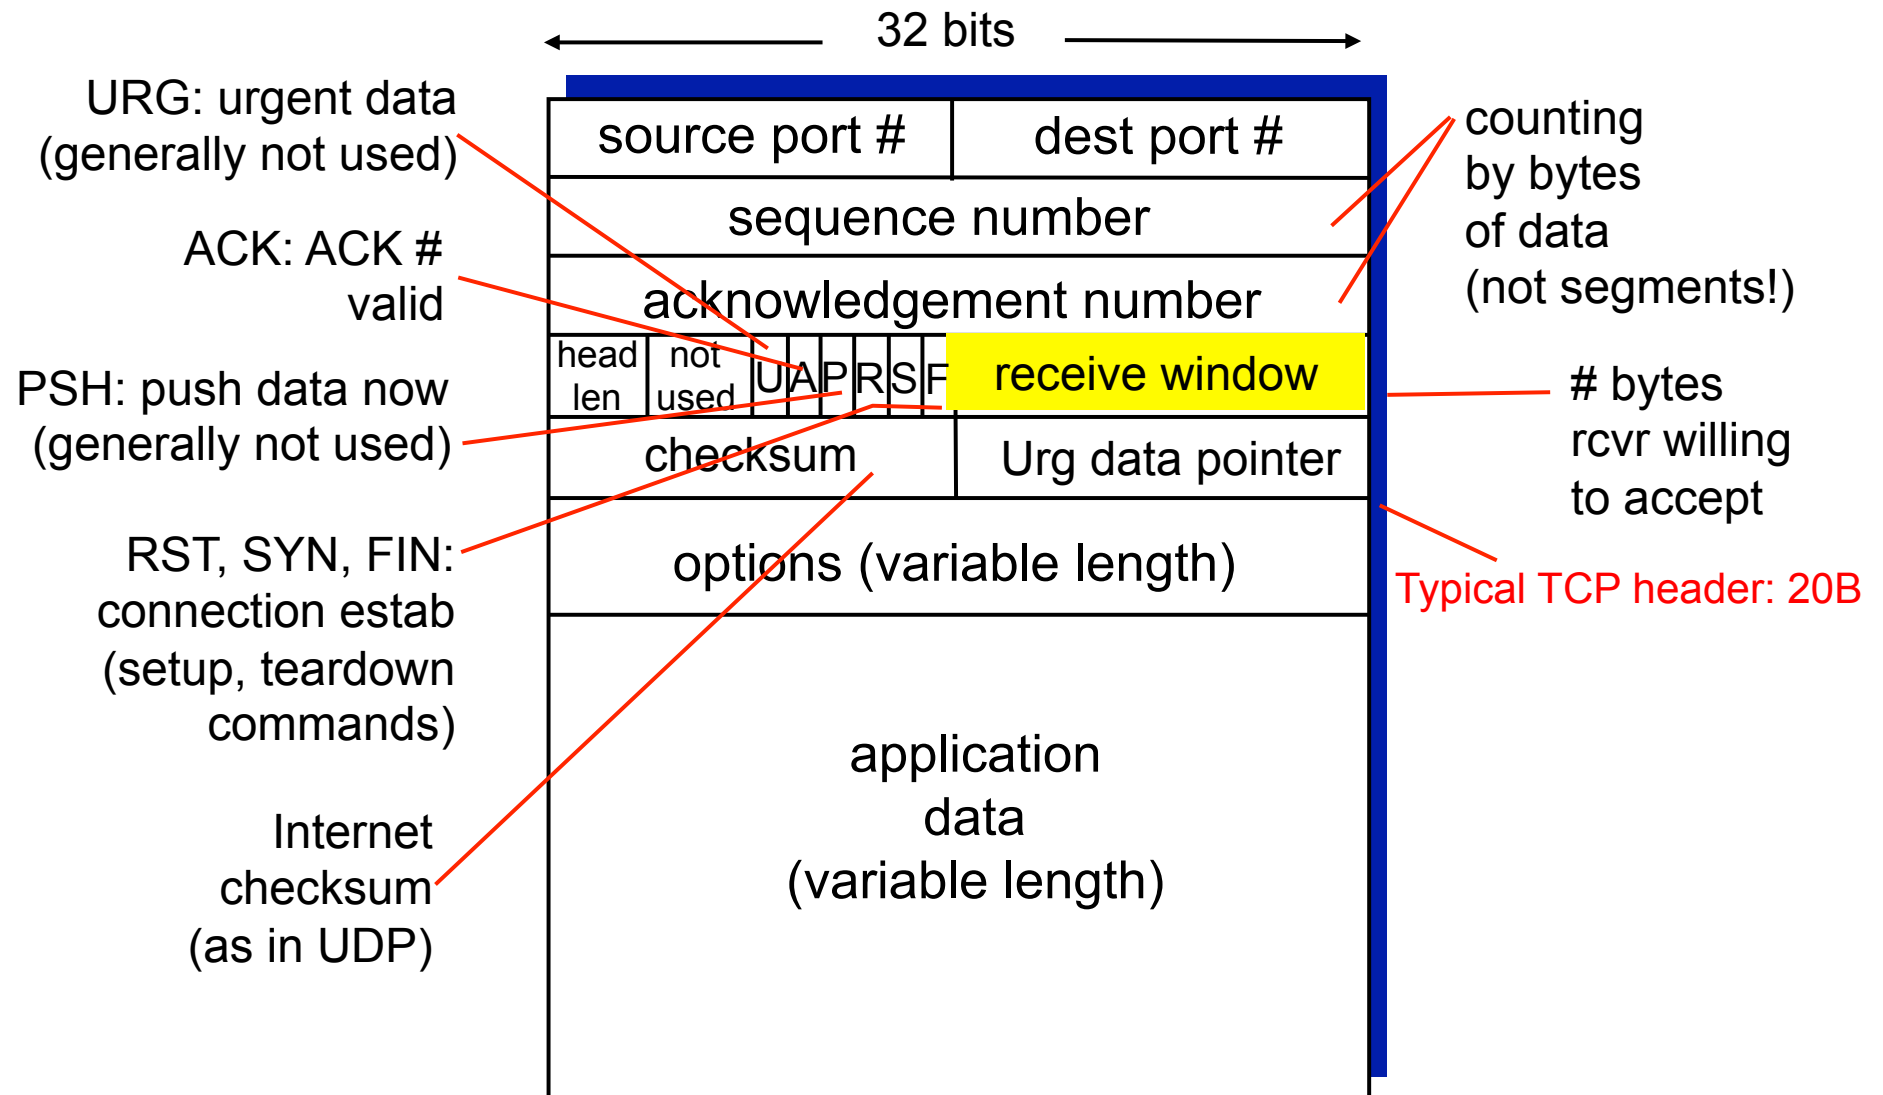

TCP flow control

- ❖ receiver “advertises” free buffer space by including **rwnd** value in TCP header of receiver-to-sender segments
 - **RcvBuffer** size set via socket options (typical default is 4096 bytes)
 - many operating systems autoadjust **RcvBuffer**
- ❖ sender limits amount of unacked (“in-flight”) data to receiver’s **rwnd** value
- ❖ guarantees receive buffer will not overflow
- ❖ See applet (Ch.3, Flow Control) companion website

