Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Intra-AS Routing

- also known as *interior gateway protocols (IGP)*
- most common intra-AS routing protocols:
  - RIP: Routing Information Protocol
  - OSPF: Open Shortest Path First
  - IGRP: Interior Gateway Routing Protocol (Cisco proprietary)

RIP (Routing Information Protocol)

- included in BSD-UNIX distribution in 1982
- distance vector algorithm
  - single distance metric: # hops (max = 15 hops), each link has cost 1
  - DVs exchanged with neighbors every 30 sec in response message (aka advertisement)
  - each advertisement: list of up to 25 destination *subnets (in IP addressing sense)*

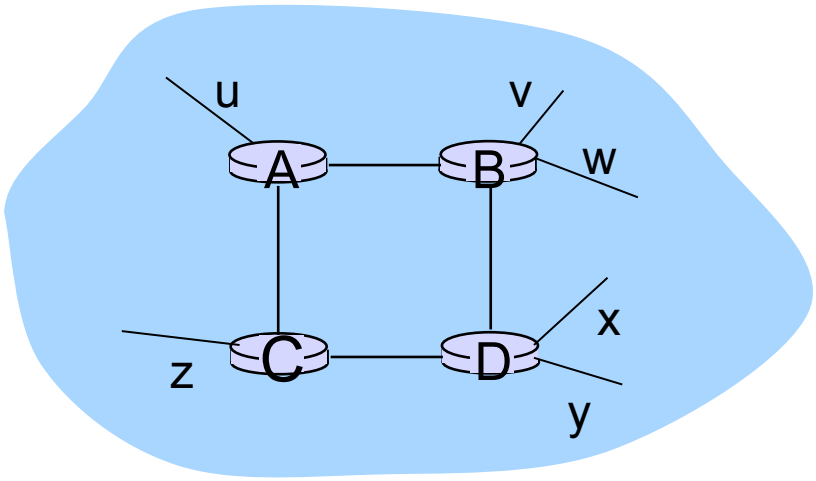

from router A to destination *subnets:*

subnet	hops
u	1
v	2
w	2
x	3
y	3
z	2

RIP: example

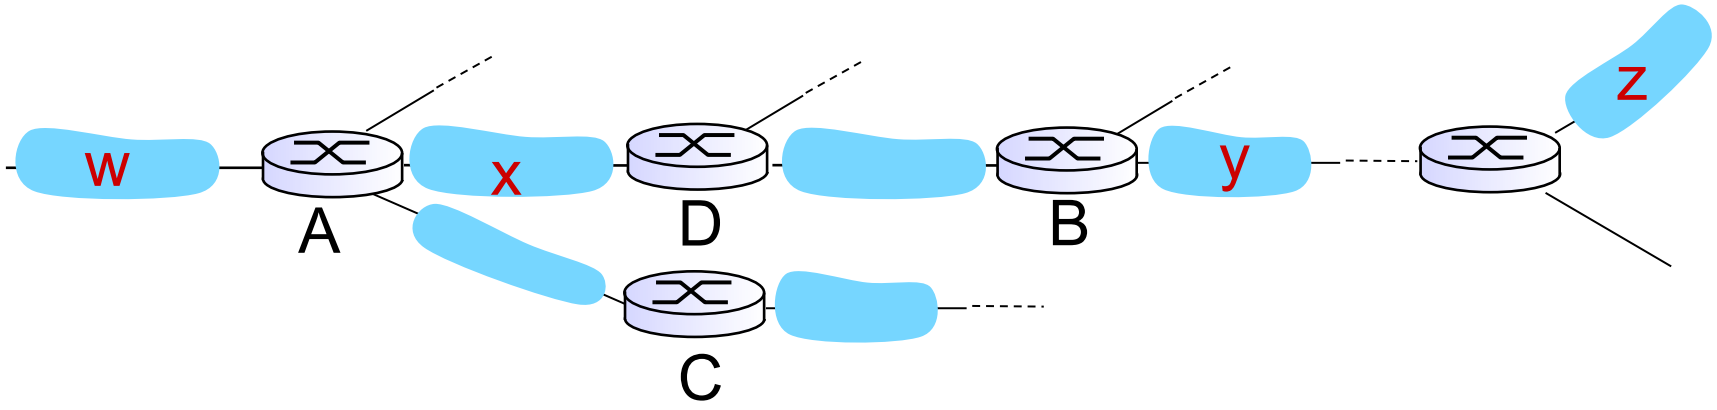

routing table in router D

destination subnet	next router	# hops to dest
w	A	2
y	B	2
z	B	7
x	--	1
….	….	….

RIP: example

A-to-D advertisement

dest	next	hops
w	-	1
x	-	1
z	C	4
…	…	…

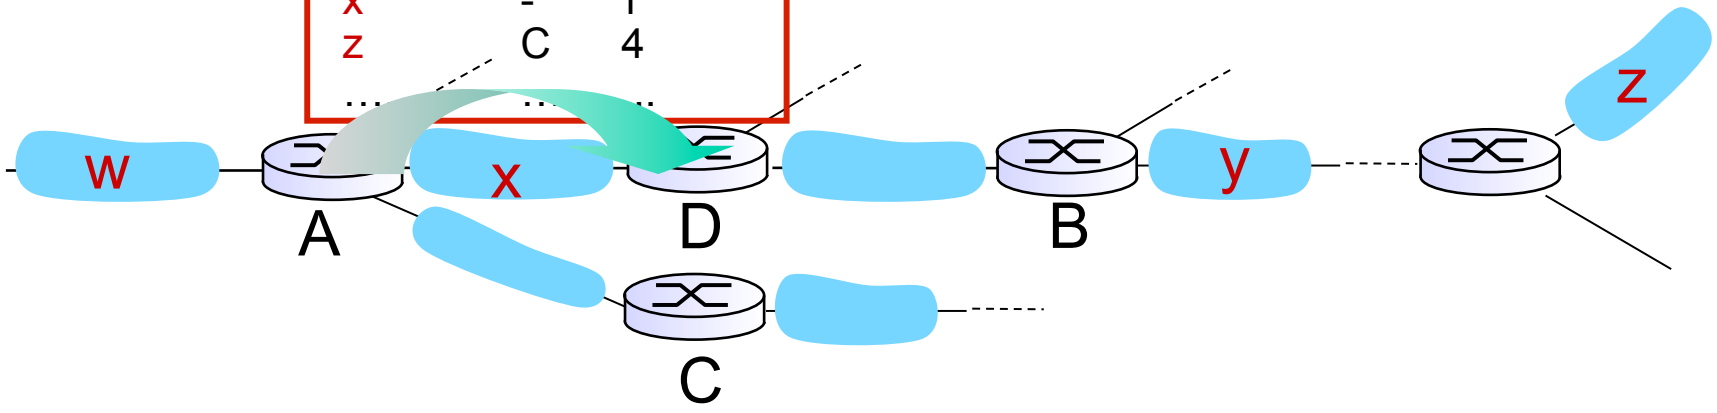

routing table in router D

destination subnet	next router	# hops to dest
w	A	2
y	B	2
z	B A	7 5
x	--	1
….	….	….

RIP: link failure, recovery

if no advertisement heard after 180 sec --> neighbor/ link declared dead

- routes via neighbor invalidated
- new advertisements sent to neighbors
  - neighbors in turn send out new advertisements (if tables changed)
- link failure info quickly (?) propagates to entire net
- *poison reverse* used to prevent ping-pong loops (infinite distance = 16 hops)

RIP table processing

- RIP routing tables managed by *application-level* process called route-d (daemon)
- advertisements sent in UDP packets, periodically repeated

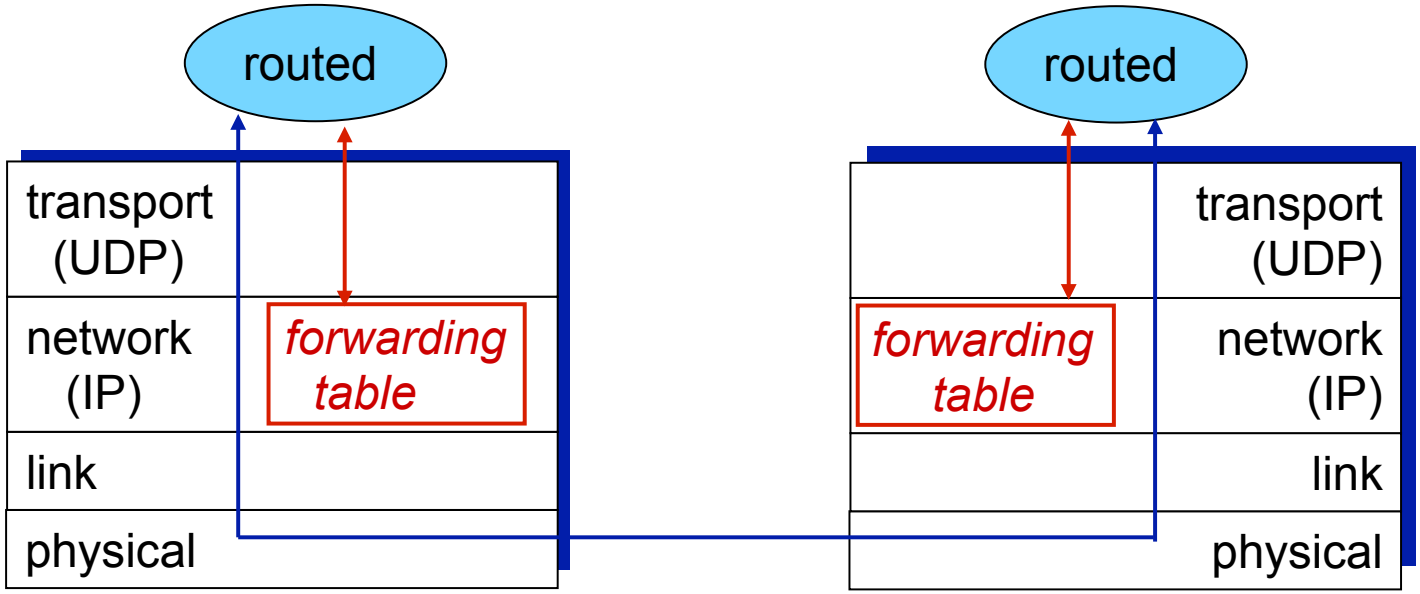

OSPF (Open Shortest Path First)

- "open": publicly available
- uses link state algorithm
  - LS packet dissemination
  - topology map at each node
  - link costs set by administrator: used to affect routing
  - route computation using Dijkstra's algorithm
- OSPF advertisement carries one entry per neighbor
- advertisements flooded to *entire* AS
  - carried in OSPF messages directly over IP (rather than TCP or UDP
  - sent upon change, periodically (every 30min)
  - HELLO messages used to check link
- *IS-IS routing* protocol: nearly identical to OSPF

OSPF "advanced" features (not in RIP)

- *security:* all OSPF messages authenticated
  - (to prevent malicious intrusion)
- multiple same-cost paths allowed
  - (only one path in RIP)
- for each link, multiple cost metrics for different TOS
  - e.g., satellite link cost set "low" for best effort ToS; high for real time ToS
- integrated unicast and multicast support:
  - Multicast OSPF (MOSPF) uses same topology data base as OSPF
- hierarchical OSPF in large domains.

Hierarchical OSPF

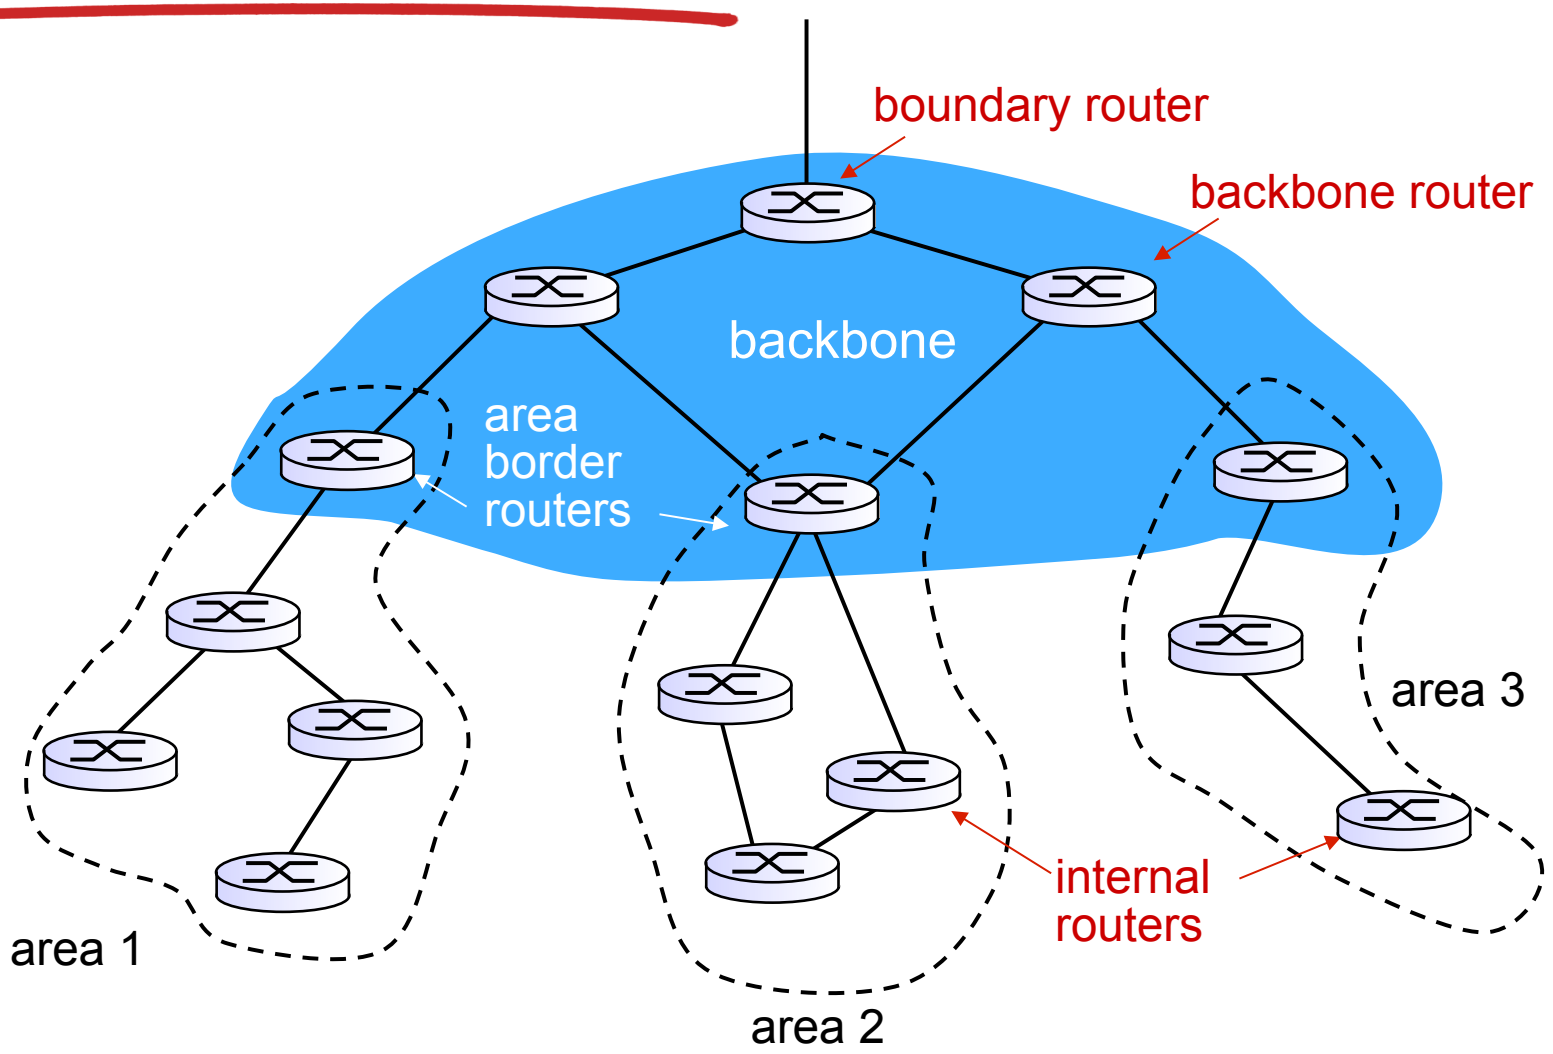

Hierarchical OSPF

- *two-level hierarchy:* local area, backbone.
  - link-state advertisements only in area
  - each node has detailed area topology; only knows direction (shortest path) to nets in other areas.
- *area border routers:* "summarize" distances to nets in own area, advertise to other Area Border routers.
- *backbone routers:* run OSPF routing limited to backbone.
- *boundary routers:* connect to other AS's.