X501

Transmitter

GRV Automation | CE Certified | Custom Configurations Available on Request

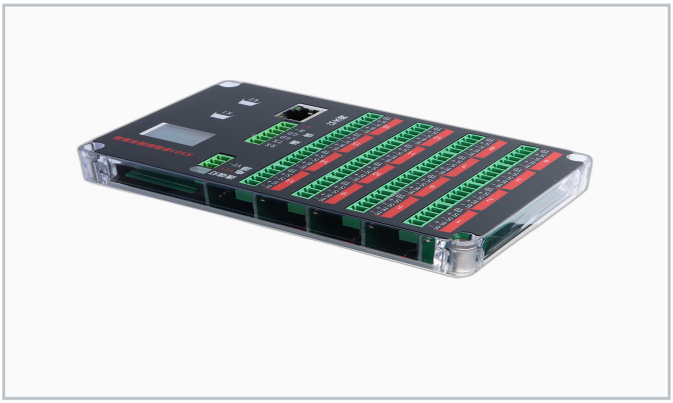

Application / Features

- 4-20mA analog signal weighing transmitter
- Channel digital display with analog output
- High-precision load cell signal conditioning
- Easy integration with industrial controllers
- Compact reliable design
- Industrial weighing, batching, process control

Rated range: Standard

Input Signal		**Load cell mV/V**
Output		**4-20mA**
Display		**4-digit LED**
Accuracy		**<=0.05% F.S.**
Power Supply	V DC	**12-24**
Communication		**RS485 (optional)**
Operating Temp.	degC	**-10 to +55**
Enclosure		**DIN rail mount**

1) High temperature sensors available (max. 150 deg C). 2) High impedance option (1000 Ohm) on request. 3) Specifications subject to change without prior notice.