GLDT116

Dynamic Torque Sensor

GRV Automation | CE Certified | Custom Configurations Available on Request

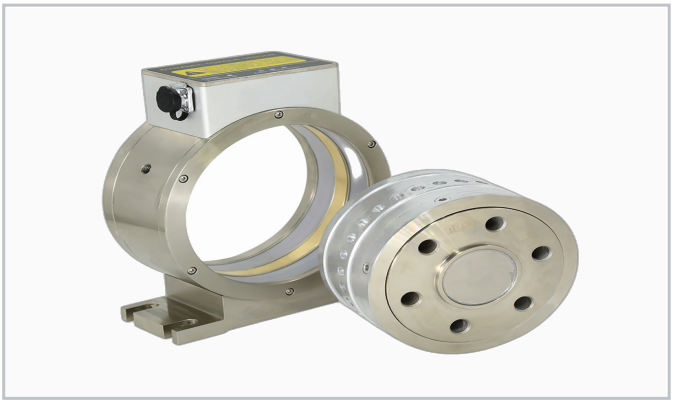

Application / Features

- Standard flange disc dynamic torque sensor
- Factory direct high value pricing
- Speed and power measurement capability
- Suitable for large industrial drive systems
- Long-term reliable performance
- Industrial drives, pump testing, motor test benches

Rated range: 5Nm - 50000Nm

Rated Capacity		**5Nm-50000Nm**
Speed Range	rpm	**0-5000**
Non-linearity	%F.S.	**0.2**
Hysteresis	%F.S.	**0.2**
Repeatability	%F.S.	**0.1**
Flange Standard		**Standard disc coupling**
Communication		**RS485**
Excitation Voltage	V DC	**5-15**
Operating Temp.	degC	**-20 to +70**
Output		**4-20mA / 0-10V / RS485**
Shaft Connection		**Standard flange disc**

1) High temperature sensors available (max. 150 deg C). 2) High impedance option (1000 Ohm) on request. 3) Specifications subject to change without prior notice.