GJBT105

Transmitter

GRV Automation | CE Certified | Custom Configurations Available on Request

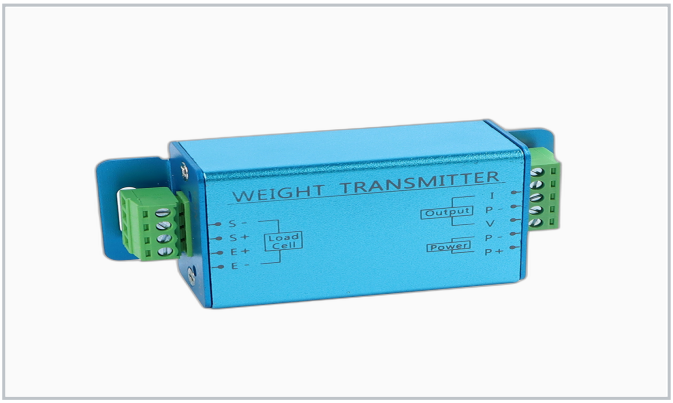

Application / Features

- 4-20mA and 0-10V weighing transmitter
- Dual output format for flexible integration
- High accuracy load cell signal amplification
- DIN rail or panel mount installation
- RS485 Modbus RTU optional
- PLC integration, industrial control, process weighing

Rated range: Standard

Input Signal		**Load cell mV/V (0.1-3 mV/V)**
Output		**4-20mA and 0-10V**
Accuracy		**<=0.05% F.S.**
Power Supply	V DC	**12-24**
Operating Temp.	degC	**-10 to +55**
Communication		**RS485 Modbus RTU (optional)**
Enclosure		**DIN rail mount**

1) High temperature sensors available (max. 150 deg C). 2) High impedance option (1000 Ohm) on request. 3) Specifications subject to change without prior notice.