GLDT106

Dynamic Torque Sensor

GRV Automation | CE Certified | Custom Configurations Available on Request

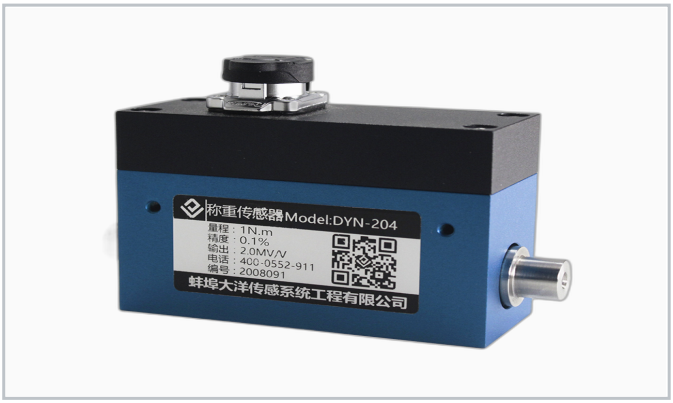

Application / Features

- Small range factory direct dynamic torque sensor
- 1800 RPM speed and power detection capability
- Compact size for small motor testing
- High precision in small torque ranges
- Cost-effective for production line use
- Small motors, servo motors, pump testing

Rated range: 0 - 5Nm

Rated Capacity		**0-5Nm**
Speed Range	rpm	**0-1800**
Non-linearity	%F.S.	**0.2**
Hysteresis	%F.S.	**0.2**
Repeatability	%F.S.	**0.1**
Excitation Voltage	V DC	**5-15**
Operating Temp.	degC	**-20 to +70**
Output		**4-20mA / 0-10V / RS485**
Communication		**RS485**
Shaft Connection		**Standard coupling**

1) High temperature sensors available (max. 150 deg C). 2) High impedance option (1000 Ohm) on request. 3) Specifications subject to change without prior notice.