GLDT110

Dynamic Torque Sensor

GRV Automation | CE Certified | Custom Configurations Available on Request

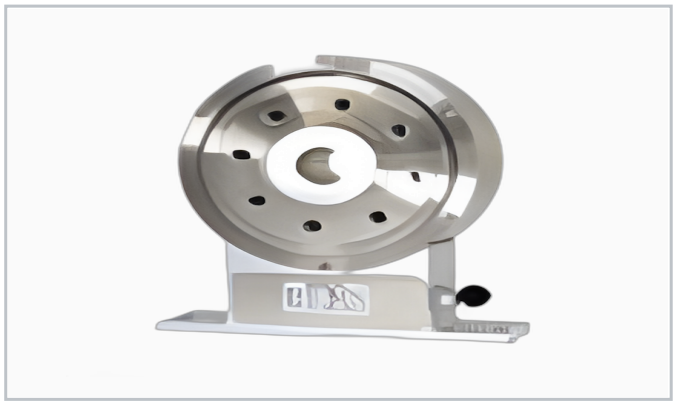

Application / Features

- Large range non-contact dynamic torque sensor
- Rated capacity 2-50000N.m
- Contactless coupler for extended service life
- Real-time torque, speed, and power measurement
- Built-in signal processing and digital output
- Heavy machinery testing, industrial motor testing, power measurement

Rated range: 2-50000N.m

Rated Capacity		**2-50000N.m**
Speed Range	rpm	**0-10000**
Non-linearity	%F.S.	**0.2**
Hysteresis	%F.S.	**0.2**
Repeatability	%F.S.	**0.1**
Material		**Alloy Steel**
Communication		**RS485 (up to 1000 Hz)**
Display		**OLED built-in**
Excitation Voltage	V DC	**5-15**
Operating Temp.	degC	**-20 to +70**
Output		**4-20mA / 0-10V / RS485**
Shaft Connection		**Standard coupling**

1) High temperature sensors available (max. 150 deg C). 2) High impedance option (1000 Ohm) on request. 3) Specifications subject to change without prior notice.