DYBH-101

Shear Beam Load Cell

GRV Automation | CE Certified | Custom Configurations Available on Request

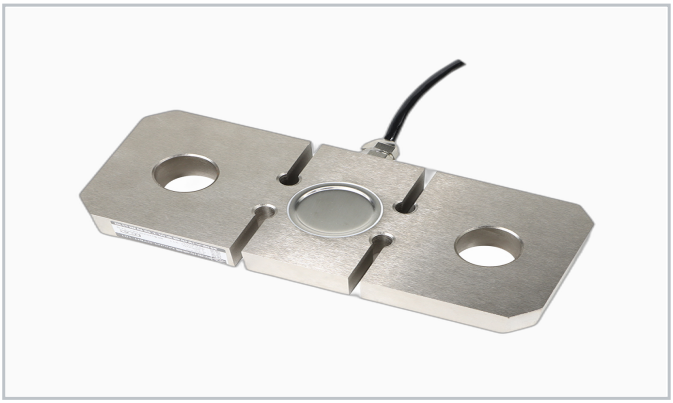

Application / Features

- Electronic platform balanced cantilever design
- High precision for truck and floor scales
- Alloy steel with IP67 protection
- Suitable for outdoor and harsh environments
- Standard mounting interface
- Truck scales, weighbridges, platform scales

Rated range: 1T - 20T

Rated Capacity		**1T-20T**
Output Sensitivity	mV/V	**2.0+/-10%**
Non-linearity	%F.S.	**0.03**
Hysteresis	%F.S.	**0.03**
Repeatability	%F.S.	**0.02**
Creep (30 min)	%F.S.	**0.03**
Material		**Alloy Steel**
Input/Output Impedance	Ohm	**350+/-5 / 350+/-5**
Excitation Voltage	V	**5-15 (recommended 10)**
Operating Temp.	degC	**-30 to +70**
Safety Overload	%R.C.	**150**
Extreme Overload	%R.C.	**200**
IP Rating		**IP67**
Cable		**D6x5m, 4-wire**

1) High temperature sensors available (max. 150 deg C). 2) High impedance option (1000 Ohm) on request. 3) Specifications subject to change without prior notice.