DYJXH-S4

Junction Box

GRV Automation | CE Certified | Custom Configurations Available on Request

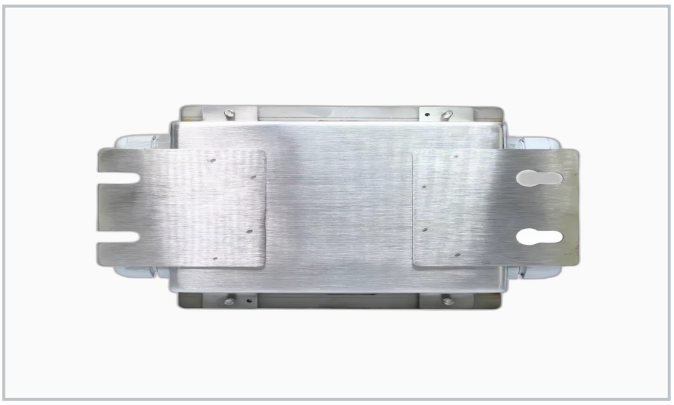

Application / Features

- IP68 stainless steel junction box
- 4-channel load cell summing
- High protection for outdoor use
- Precision summing for multi-cell systems
- Easy field installation
- Tank weighing, floor scales, weighbridge summing

Rated range: Standard

Channels		**4**
Output		**Summed analog mV/V**
Protection		**IP68**
Material		**Stainless Steel 304**
Operating Temp.	degC	**-20 to +70**
Input Impedance	Ohm	**350**
Cable Entry		**M16 waterproof gland**
Mounting		**DIN rail or wall**

1) High temperature sensors available (max. 150 deg C). 2) High impedance option (1000 Ohm) on request. 3) Specifications subject to change without prior notice.