DYTB-001

Tension Sensor

GRV Automation | CE Certified | Custom Configurations Available on Request

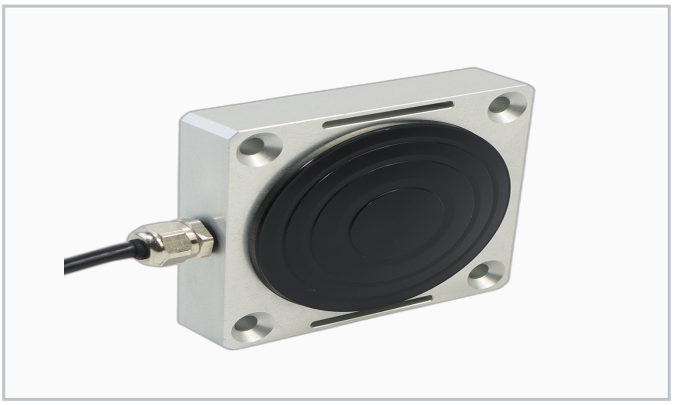

Application / Features

- Capsule tension and compression sensor
- High stability with anti-interference output
- Can be installed in confined spaces
- Non-standard customization available
- Quality stainless steel body
- Automobile compression, assembly line force testing

Rated range: 100kg - 1T

Rated Capacity		**100kg-1T**
Output Sensitivity	mV/V	**2.0+/-10%**
Non-linearity	%F.S.	**0.03**
Hysteresis	%F.S.	**0.03**
Repeatability	%F.S.	**0.02**
Material		**Stainless Steel**
Input/Output Impedance	Ohm	**350+/-5 / 350+/-5**
Excitation Voltage	V	**5-15 (recommended 10)**
Operating Temp.	degC	**-20 to +70**
Safety Overload	%R.C.	**150**
IP Rating		**IP67**
Cable		**D4x3m, 4-wire**

1) High temperature sensors available (max. 150 deg C). 2) High impedance option (1000 Ohm) on request. 3) Specifications subject to change without prior notice.