DYZ-100

Column Type Load Cell

GRV Automation | CE Certified | Custom Configurations Available on Request

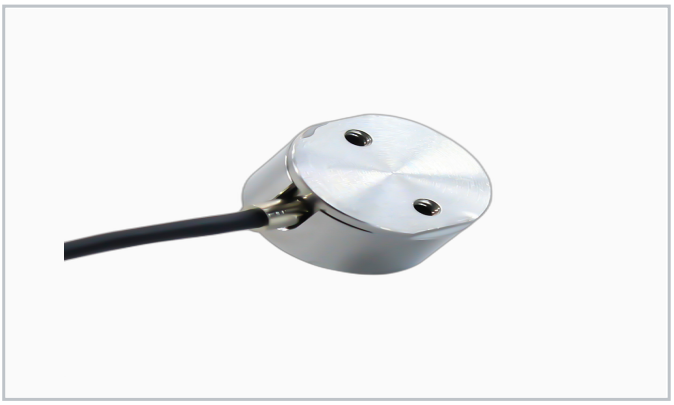

Application / Features

- High-precision mini small-size tension/compression
- Wide capacity from 0.5kg to 10kg
- High accuracy for small force applications
- Stainless steel anti-corrosion body
- Non-standard customization available
- Material testing, small weighing, laboratory use

Rated range: 0.5kg - 10kg

Rated Capacity		**0.5kg-10kg**
Output Sensitivity	mV/V	**2.0+/-10%**
Non-linearity	%F.S.	**0.03**
Hysteresis	%F.S.	**0.03**
Repeatability	%F.S.	**0.02**
Material		**Stainless Steel**
Input/Output Impedance	Ohm	**350+/-5 / 350+/-5**
Excitation Voltage	V	**5-15 (recommended 10)**
Operating Temp.	degC	**-20 to +70**
Safety Overload	%R.C.	**150**
IP Rating		**IP65**
Cable		**D3x2m, 4-wire**

1) High temperature sensors available (max. 150 deg C). 2) High impedance option (1000 Ohm) on request. 3) Specifications subject to change without prior notice.