# GLSH309

## Shear Beam Load Cell

GRV Automation | CE Certified | Custom Configurations Available on Request

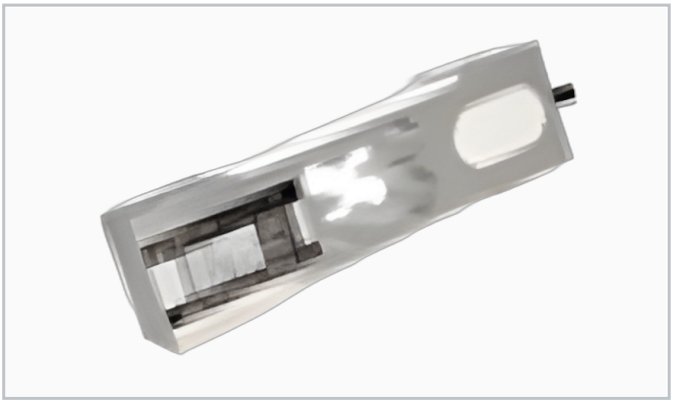

### Application / Features

- Heavy-duty single point shear beam
- OIML accuracy class C3
- Alloy steel with robust design
- Suitable for large platform scales
- Easy drop-in installation
- Industrial platform scales, checkweighers

**Rated range: 1kg - 500kg**

| | | |
|---|---|---|
| **Rated Capacity** | | **1kg-500kg** |
| **Output Sensitivity** | mV/V | **2.0+/-10%** |
| **Accuracy Class** | | **C3 (OIML)** |
| **Non-linearity** | %F.S. | **0.017** |
| **Hysteresis** | %F.S. | **0.017** |
| **Repeatability** | %F.S. | **0.010** |
| **Material** | | **Alloy Steel** |
| **Input/Output Impedance** | Ohm | **350+/-5 / 350+/-5** |
| **Excitation Voltage** | V | **5-15 (recommended 10)** |
| **Operating Temp.** | degC | **-10 to +40** |
| **Safety Overload** | %R.C. | **150** |
| **IP Rating** | | **IP65** |
| **Cable** | | **D4x2m, 4-wire** |

*1) High temperature sensors available (max. 150 deg C). 2) High impedance option (1000 Ohm) on request. 3) Specifications subject to change without prior notice.*

**GRV Automation | WeWork Latitude, Hebbal, Bengaluru - 560024, Karnataka, India**
Tel: +91 9008 300 172 | info@grvautomation.com | www.grvautomation.com | We reserve the right to make technical alterations without prior notice.