# GLSP101

## Spoke Type Load Cell

GRV Automation | CE Certified | Custom Configurations Available on Request

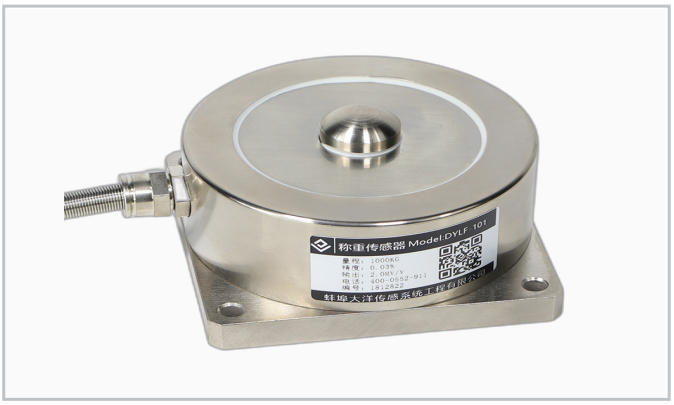


### Application / Features

- Universal truck and compression load cell
- 0-50 ton range for heavy industrial use
- Shear tension and compression modes
- Alloy steel with high IP protection
- Suitable for multi-cell parallel configurations
- Truck scales, weighbridges, tank systems

**Rated range: 100kg - 50T**

| | | |
|---|---|---|
| **Rated Capacity** | | **100kg-50T** |
| **Output Sensitivity** | mV/V | **2.0+/-10%** |
| **Non-linearity** | %F.S. | **0.03** |
| **Hysteresis** | %F.S. | **0.03** |
| **Repeatability** | %F.S. | **0.02** |
| **Creep (30 min)** | %F.S. | **0.05** |
| **Material** | | **Alloy Steel** |
| **Input/Output Impedance** | Ohm | **350+/-5 / 350+/-5** |
| **Excitation Voltage** | V | **5-15 (recommended 10)** |
| **Operating Temp.** | degC | **-30 to +70** |
| **Safety Overload** | %R.C. | **150** |
| **IP Rating** | | **IP67** |
| **Cable** | | **D6x5m, 4-wire** |

*1) High temperature sensors available (max. 150 deg C). 2) High impedance option (1000 Ohm) on request. 3) Specifications subject to change without prior notice.*