# GLST105

## S Type Load Cell

GRV Automation | CE Certified | Custom Configurations Available on Request

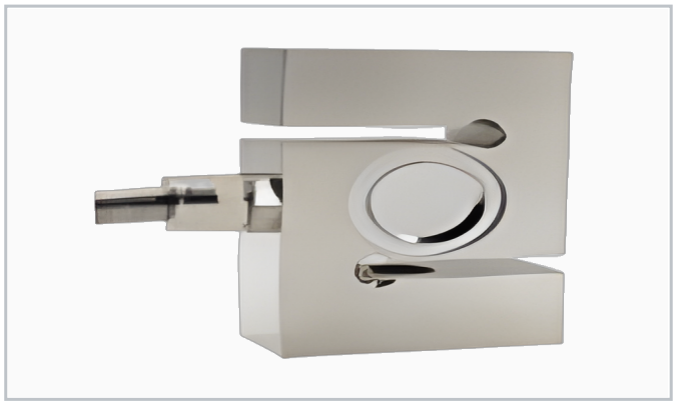

### Application / Features

- Tension & compression dual-direction
- Compact S-beam structure
- High accuracy measurement
- Long-term stability
- Alloy steel, nickel plated
- Packaging scales, automation equipment

**Rated range: 0 - 1.5T**

| | | |
|---|---|---|
| **Rated Capacity** | | **0-1.5T** |
| **Output Sensitivity** | mV/V | **2.0+/-10%** |
| **Zero Point Output** | %F.S. | **+/-1** |
| **Non-linearity** | %F.S. | **0.03** |
| **Hysteresis** | %F.S. | **0.03** |
| **Repeatability** | %F.S. | **0.02** |
| **Creep (30 min)** | %F.S. | **0.03** |
| **Temp. Sensitivity Drift** | %F.S./10 degC | **0.03** |
| **Zero Temp. Drift** | %F.S./10 degC | **0.03** |
| **Response Frequency** | Hz | **1k** |
| **Material** | | **Alloy Steel** |
| **Input/Output Impedance** | Ohm | **350+/-5 / 350+/-5** |
| **Insulation Resistance** | MOhm/100V DC | **>=5000** |
| **Excitation Voltage** | V | **5-15 (recommended 10)** |
| **Operating Temp.** | degC | **-20 to +80** |
| **Safety Overload** | %R.C. | **150** |
| **Extreme Overload** | %R.C. | **200** |
| **Cable** | | **D5x3m, 4-wire** |
| **TEDS** | | **Selectable** |

*1) High temperature sensors available (max. 150 deg C). 2) High impedance option (1000 Ohm) on request. 3) Specifications subject to change without prior notice.*