GLSH309

Shear Beam Load Cell

GRV Automation | CE Certified | Custom Configurations Available on Request

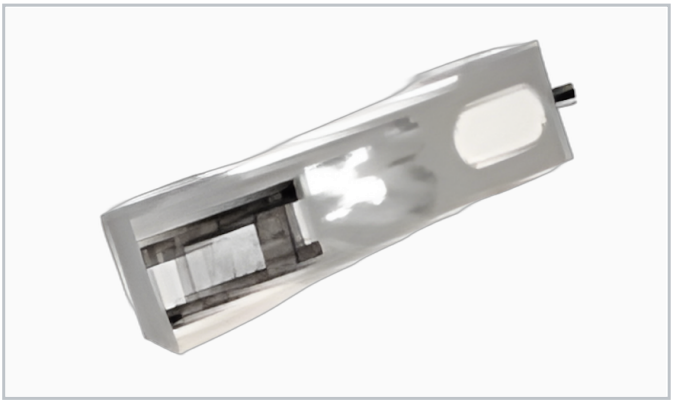

Application / Features

- Heavy-duty single point shear beam
- OIML accuracy class C3
- Alloy steel with robust design
- Suitable for large platform scales
- Easy drop-in installation
- Industrial platform scales, checkweighers

Rated range: 1kg - 500kg

Rated Capacity		**1kg-500kg**
Output Sensitivity	mV/V	**2.0+/-10%**
Accuracy Class		**C3 (OIML)**
Non-linearity	%F.S.	**0.017**
Hysteresis	%F.S.	**0.017**
Repeatability	%F.S.	**0.010**
Material		**Alloy Steel**
Input/Output Impedance	Ohm	**350+/-5 / 350+/-5**
Excitation Voltage	V	**5-15 (recommended 10)**
Operating Temp.	degC	**-10 to +40**
Safety Overload	%R.C.	**150**
IP Rating		**IP65**
Cable		**D4x2m, 4-wire**

1) High temperature sensors available (max. 150 deg C). 2) High impedance option (1000 Ohm) on request. 3) Specifications subject to change without prior notice.

GRV Automation | WeWork Latitude, Hebbal, Bengaluru - 560024, Karnataka, India
Tel: +91 9008 300 172 | info@grvautomation.com | www.grvautomation.com | We reserve the right to make technical alterations without prior notice.