



Established in 2009. Theatre Dimmer Hardware (TDH) is one of the leading Manufacturer, Wholealer and Trader of DMX Spliter, Electronic Dimmer, Dimmer Rack, Sharpy Light, LED Spotlight, Stage Light and Theater Profile Light. Our vendors employ the most modern machinery to carry out production and other related processes perfectly.

WHY US

- Industry leading prices
- Qualitative products
- Ability to undertake bulk orders
- Timely deliveries



TDH

Theatre Dimmer Hardware

REACH US



B-41, Sector-64, Noida,
U.P. - 201301



+91 9811335569



dinesh.ce08@gmail.com



LED PAR LIGHT RGB

Product Model No. : TDHLP001

Product Description : LED PAR RGB

High Quality Bright LED Par Light with RGB Colors source, High throw, Event Performance effect lighting, precision color output LED Par light made with die casted aluminum housing, dual yoke arrangement suitable to use for Stage Lighting, Decorative Lighting, Dance, DJ & Pub lighting and indoor beautifications, multipurpose requirements.

Accessories: Safety Chain, C Clamp



Technical Specifications:

Electrical & Power:

- Power Consumption 162W
- Input Voltage AC 110V ~ 240V, 50/60Hz

Optical Arrangement:

- Beam Angle - 25°
- Optional Beam Angle – 15° & 45°

Lamp Source:

- LED COB Based Source
- RGB 54 x 3W
- 50,000 Hours Burning life

Control:

- DmX 512 Through 3/5 Pin XLR
- 7 Channel DmX Control
- Manual Mode Operation
- Sound Active Mode Control
- Master Slave Mode

Others:

- Working Temperature +45° ~ -30°
- Unlimited Colour Mixing Options
- 65dB ~ 130dB Sound sensing capacity

Physical & Construction:

- Dimension 250x 265x 235mm
- Weight 4.04 Kgs
- Dmx 3 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20 Rated
- Aluminum Body
- Single or Dual Yoke Mount
- Black Powder coated finish
- LED Easy View Display



LED PAR LIGHT RGBW

Product Model No. : TDHLP002

Product Description : LED PAR RGBW

High Quality Bright LED Par Light with RGBW Colors source, High throw, Event Performance effect lighting, precision color output LED Par light made with die casted aluminum housing, dual yoke arrangement suitable to use for Stage Lighting, Decorative Lighting, Dance, DJ & Pub lighting and indoor beautifications, multipurpose requirements.

Accessories: Safety Chain, C Clamp



Technical Specifications:

Electrical & Power:

- Power Consumption 162W
- Input Voltage AC 110V ~ 240V, 50/60Hz
- 0 to 100 % smooth dimming
- Strobe effect upto20 Frames per Second (FPS)

Others:

- Working Temperature +45° ~ -30°
- Unlimited Colour Mixing Options
- 65dB ~ 130dB Sound sensing capacity

Optical Arrangement:

- Beam Angle - 25°
- Optional Beam Angle – 15° & 45°

Lamp Source:

- LED SMD Based Source
- RGBW 54 x 3W
- 50,000 Hours Burning life

Control:

- DmX 512 Through 3/5 Pin XLR
- 7 Channel DmX Control
- Manual Mode Operation
- Sound Active Mode Control
- Master Slave Mode

Physical & Construction:

- Dimension 250x 265x 235mm
- Weight 4.04 Kgs
- Dmx 3 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20 Rated
- Aluminum Body
- Single or Dual Yoke Mount
- Black Powder coated finish
- LED Easy View Display



LED WARM WHITE LIGHT

Product Model No. : TDHLWW003

Product Description : LED WARM WHITE LIGHT

High Bright LED Par Light with 3200K Color source, High throw, LED Par light made with die casted aluminum housing, dual yoke arrangement suitable to use for DJ's, Decorations.

Light beam angle can be controlled with lens customized for specific use.



Accessories: Safety Chain, C Clamp

Technical Specifications:

Electrical & Power:

- Power Consumption 162W
- Input Voltage AC 110V ~ 240V, 50/60Hz

Others:

- Working Temperature +45° ~ -30°

Optical Arrangement:

- Beam Angle - 25°
- Optional Beam Angle – 15° & 45°

Physical & Construction:

- Dimension 250x 265x 235mm
- Weight 4.04 Kgs
- DmX 3 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20 Rated
- Aluminum Body
- Single or Dual Yoke Mount
- Black Powder coated finish
- LED Easy View Display

Lamp Source:

- LED SMD Based Source
- WW 54 x 3W
- 50,000 Hours Burning life

Control:

- DmX 512 Through 3/5 Pin XLR
- 2 Channel DmX Control
- Manual Mode Operation
- Master Slave Mode



LED COB PAR LIGHT

Product Model No. : TDHLC004

Product Description : LED COB PAR LIGHT

High Quality Bright LED COB Par Light with 3200K/5600K/BiColor source, High throw, precision color output LED Par light made with die casted aluminum housing, dual yoke arrangement suitable to use for Stage Lighting, Tv Studio lighting and indoor architectural illumination giving high CRI, TLCI & R9 values. Light beam angle can be controlled with lens customized for specific use.

Accessories: Safety Chain, C Clamp



Technical Specifications:

Electrical & Power:

- Power Consumption 100W
- Input Voltage AC 110V ~ 240V, 50/60Hz

Optical Arrangement:

- Beam Angle - 25°
- Multi faceted reflected

Lamp Source:

- LED COB Based Source
- 3200K - 100W x 1
- Colour Rendering Index 97+
- Tel. Lighting Consistency Index 96+
- 50,000 Hours Burning life

Control:

- DmX 512 Through 3/5 Pin XLR
- 1/3 Channel DmX Control
- Manual Mode Operation
- Noiseless Operation

Others:

- Working Temperature +45° ~ -30°
- Flicker Free for High FPS
- Efficient Heat Sink Design
- No Multiple Shadows – Single Source illumination

Physical & Construction:

- Dimension 250x 265x 235mm
- Weight 5.55 Kgs/ 7.8lbs
- Dmx 3 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20 Rated
- Aluminum Body
- Single or Dual Yoke Mount
- Black Powder coated finish
- LED Easy View Display



LED 4 EYE PAR LIGHT

Product Model No. : TDHL4E005

Product Description : LED 4 EYE PAR LIGHT

High Quality Bright LED 4 EYE Par Light with 3200K/5600K/BiColor source, High throw, precision color output LED Par light made with die casted aluminum housing, dual yoke arrangement suitable to use for Stage Lighting, Tv Studio lighting and indoor architectural illumination giving high CRI, TLCI & R9 values. Light beam angle can be controlled with lens customized for specific use.

Accessories: Safety Chain, C Clamp



Technical Specifications:

Electrical & Power:

- Power Consumption 160W
- Input Voltage AC 110V ~ 240V, 50/60Hz

Optical Arrangement:

- Beam Angle - 25°
- Optional Beam Angle – 15°24°36°

Lamp Source:

- LED 4 EYE Based Source
- 3200K - 40W x 4
- Colour Rendering Index 97+
- Tel. Lighting Consistency Index 96+
- 50,000 Hours Burning life

Control:

- DmX 512 Through 3/5 Pin XLR
- 1/3 Channel DmX Control
- Manual Mode Operation
- Noiseless Operation

Others:

- Working Temperature +45° ~ -30°
- Flicker Free for High FPS
- Efficient Heat Sink Design
- No Multiple Shadows – Single Source illumination

Physical & Construction:

- Dimension 250x 265x 235mm
- Weight 5.55 Kgs/ 7.8lbs
- Dmx 3 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20 Rated
- Aluminum Body
- Single or Dual Yoke Mount
- Black Powder coated finish
- LED Easy View Display



PLANO CONVEX LIGHT 1000W

Product Model No. : TDHPC006

Product Description : PLANO CONVEX LIGHT 1000W

The high power spot light is available with planoconvex lens. Made with adequate ventilation to suit Indian climate, the angle of spot with Planoconvex lens can be varied from hard to soft by manipulating the movements of the lamp carriage with variable spread. It can be used from a distance of 10-12 mtrs. Suitable for F.O.H. positions, particularly where long throw is necessary.



Accessories: Safety Chain, C Clamp

Technical Specifications:

Electrical & Power:

- Power Consumption 1000W
- Input Voltage AC 110V ~ 240V, 50/60Hz

Others:

- Working Temperature +45° ~ -30°
- Cooling : Air ventilates

Optical Arrangement:

- Beam Angle - 7°-56°
- PC Lens

Physical & Construction:

- Dimension 250x 265x 235mm
- Weight 5.55 Kgs
- DmX 3 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20 Rated
- Aluminum Body
- Single or Dual Yoke Mount
- Black Powder coated finish
- LED Easy View Display

Lamp Source:

- Halogen Based Source
- CCT: 3200K
- Lamp Base: G 9.5, G 22, G38

Control:

- DmX 512 Through 3/5 Pin XLR
- 1 Channel DmX Control



LED PLANO CONVEX LIGHT

Product Model No. : TDHLPC007

Product Description : LED PLANO CONVEX LIGHT 200W

The high power spot light is available with planoconvex lens. Made with adequate ventilation to suit Indian climate, the angle of spot with Planoconvex lens can be varied from hard to soft by manipulating the movements of the lamp carriage with variable spread. It can be used from a distance of 10-12 mtrs. Suitable for F.O.H. positions, particularly where long throw is necessary.

Accessories: Barndoors, Safety Chain, C Clamp



Technical Specifications:

Electrical & Power:

- Power Consumption 200W
- Input Voltage AC 110V ~ 240V, 50/60Hz

Optical Arrangement:

- Beam Angle - 7°-56°
- PC Lens

Lamp Source:

- LED Based Source
- CCT: 3200K

Control:

- DmX 512 Through 3/5 Pin XLR
- 1 Channel DmX Control

Others:

- Working Temperature +45° ~ -30°
- Cooling : Air ventilates

Physical & Construction:

- Dimension 250x 265x 235mm
- Weight 5.55 Kgs
- DmX 3 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20 Rated
- Aluminum Body
- Single or Dual Yoke Mount
- Black Powder coated finish
- LED Easy View Display



LED FRESNEL SPOT LIGHT 200W

Product Model No. : TDHLFS008

Product Description : LED FRESNEL SPOT LIGHT 200W

High Quality Bright LED Fresnel Spot Light with 3200K Color source, High throw, precision color output LED Par light made with die casted aluminum housing, dual yoke arrangement suitable to use for Stage Lighting, Tv Studio lighting and indoor architectural illumination giving high CRI, TLCI & R9 values. Light beam angle can be controlled with lens customized for specific use. Reflector Spherical,Anodized finish, Color Black, Focusing Front/Back/Rotary Knob.

Accessories: Barndoar, Safety Chain, C Clamp



Technical Specifications:

Electrical & Power:

- Power Consumption 200W
- Input Voltage AC 110V ~ 240V, 50/60Hz

Optical Arrangement:

- Beam Angle - 30°
- Multi faceted reflected
- Zooming scale - 15-45°

Lamp Source:

- LED COB Based Source
- 3200K – 200W x 1
- Colour Rendering Index 98+
- Tel. Lighting Consistency Index 97+
- 50,000 Hours Burning life

Control:

- Dmx 512 Through 3/5 Pin XLR
- 1 Channel Dmx Control
- Manual Mode Operation

Others:

- Working Temperature +45° ~ -30°
- 200mm Lens
- Efficient Heat Sink Design
- No Multiple Shadows – Single Source illumination

Physical & Construction:

- Dimension 250x 265x 235mm
- Weight 3.55 Kgs/ 7.8lbs
- Dmx 3 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20 Rated
- Aluminum Body
- Single or Dual Yoke Mount
- Black Powder coated finish
- LED Easy View Display



HALOGEN FRESNEL SPOT LIGHT 1000W

Product Model No. : TDHFS009

Product Description : HALOGEN FRESNEL SPOT LIGHT 1000W

High Quality and high bright Halogen Fresnel Spot light 1000W Lamp source having excellent purity parameters like CRI & TLCI Values makes it ideal to use it for Tv Studio Lighting, Auditorium Stage Lighting, Church Lighting, Film Lighting and other multipurpose applications. Light is made with Threaded German Fresnel lens with accurate zoom in beam angle.



Accessories: Barndoors, Safety Chain, C Clamp

Technical Specifications:

Electrical & Power:

- Power Consumption 1000W
- Input Voltage AC 110V ~ 240V, 50/60Hz

Others:

- Working Temperature +45° ~ -30°

Optical Arrangement:

- Beam Angle - 10°- 50°

Control:

- DmX 512 Through Dimmer

Lamp Source:

- Halogen Based Source
- CTC - 3200K



PAR 64 LIGHT 1000W

Product Model No. : TDHPL010

Product Description : PAR 64 LIGHT 1000W

Stage Lights India are manufacture and supply a wide range of Led Par Lights. These are ergonomically engineered from top quality components which are procured from trustworthy vendors of the market. Our lights are admired for their perfect illumination, sturdiness and energy efficient nature. Besides, we ensure timely delivery of our products at our clients' end.

Accessories: Safety Chain, C Clamp

Technical Specifications:

Electrical & Power:

- Power Consumption 1000W
- Input Voltage AC 110V ~ 240V, 50/60Hz



Others:

- Working Temperature +45° ~ -30°

Optical Arrangement:

- Beam Angle - 8°,12°,18°

Control:

- DmX 512 Through dimmer
- Dimmer based

Lamp Source:

- Halogen Based Source
- Color Temp 3200K
- Lamp Type: Narrow, Medium, Wide



LED PROFILE SPOT LIGHT

Product Model No. : TDHLPF011

Product Description : 150/200W LED PROFILE SPOT LIGHT

High Quality Superior Output Long throw professional ellipsoidal 150/200W LED profile spot light 05°, 14°, 19°, 26°, 36°, 50° beam angle with sharp edge high quality optical lens system suitable for special illumination effects for Auditorium stages, TV production Studios Event Stages and multipurpose venues.



Accessories: Safety Chain, C Clamp

Technical Specifications:

Electrical & Power:

- Power Consumption 150/200W
- Input Voltage AC 110V ~ 240V, 50/60Hz

Others:

- Working Temperature +40° ~ -30°
- Strobe option adjustable 1 ~ 25 times/Sec
- 4 Kinds of Dimming Curves

Optical Arrangement:

- Beam Angle 05°, 14°, 19°, 26°, 36°, 50°

Physical & Construction:

- LED COB Based Source 3200K
- Colour Rendering Index 97+
- Tel. Lighting Consistency Index 97+
- R9 Value 90+
- 50,000 Hours Burning life

- Dimension 300x 700x 310mm
- Weight 6 Kgs/ 13.2 lbs
- Dmx 3 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20 Rated
- Plastic Moulded Body
- Efficient and well designed reflector
- Single or Dual Yoke Mount
- Black/White Powder coated finish
- LED Easy View Display

Control:

- Dmx 512 Through 3/5 Pin XLR
- 1/3 Channel Dmx Control
- DMX/RDM/Auto Run/Master Slave & Manual
- 0% to 100% Dimming
- Manual focus with 4 beam shaping cutters



LED BLINDER LIGHT 400W

Product Model No. : TDHLB012

Product Description : LED BLINDER LIGHT 400W

High bright uniform distributed 100W Each LED Source for illuminating the multipurpose venues, large audience, Auditorium Stages, DJ & Event Stages, Large photographic venues, Production Studios, Discotheques, Film & Band performances for providing flood lighting effect.

Accessories: Safety Chain, C Clamp



Technical Specifications:

Electrical & Power:

- Power Consumption 400W
- Input Voltage AC 110V ~ 240V, 50/60Hz

Optical Arrangement:

- Beam Angle - 30°

Lamp Source:

- LED COB Based Source 3200K
- 3200K/5600K, 4 x 100W Chip on Board
- Colour Rendering Index 95+
- Tel. Lighting Consistency Index 97+
- R9 Value 90+
- 50,000 Hours Burning life

Control:

- DmX 512 Through 3 Pin XLR
- 2/5 Channel DmX Control
- Manual Mode Operation
- Noiseless Operation

Others:

- Working Temperature +40° ~ -30°
- Strobe option adjustable 1 ~ 25 times/Sec Variable
- 11.7KHz Refresh Rate

Physical & Construction:

- Dimension 490x 422x 168mm
- Weight 5 Kgs/ 11.0lbs
- Power Loop In and Out
- Ingress Protection IP20 Rated
- Single or Dual Yoke Mount
- MS Body with Black Powder coated finish
- LED Easy View Display



LED BLINDER LIGHT 200W

Product Model No. : TDHLB012

Product Description : LED BLINDER LIGHT 200W

High bright uniform distributed 100W Each LED Source for illuminating the multipurpose venues, large audience, Auditorium Stages, DJ & Event Stages, Large photographic venues, Production Studios, Discotheques, Film & Band performances for providing flood lighting effect.



Accessories: Safety Chain, C Clamp

Technical Specifications:

Electrical & Power:

- Power Consumption 200W
- Input Voltage AC 110V ~ 240V, 50/60Hz

Others:

- Working Temperature +40° ~ -30°
- Strobe option adjustable 1 ~ 25

Optical Arrangement:

- Beam Angle - 30°

Lamp Source:

- LED COB Based Source 3200K
- 2 x 100W 3200K
- 50,000 Hours Burning life

Physical & Construction:

- Dimension 370x 240x 150mm
- Weight 3.20 Kgs/ 11.0lbs
- Power Loop In and Out
- Ingress Protection IP20 Rated
- Single or Dual Yoke Mount
- MS Body with Black Powder coated finish
- LED Easy View Display

Control:

- DmX 512 Through 3 Pin XLR
- 2/5 Channel DmX Control
- Manual Mode Operation
- Noiseless Operation



LED WASH LIGHT CYCLORAMA

Product Model No. : TDHLCW013

Product Description : LED WASH LIGHT CYCLORAMA

High Quality Bright LED Wash Light with Bi Color or RGB Colors source having uniform color throw throughout beam designed and developed to suit special illumination effects like Cyclorama Wash for Auditorium backgrounds, Color effects for Stage, Event Performance effect lighting, Studio Lighting and for multipurpose venues, Aesthetic beautifications etc..

Accessories: Barndoors, Safety Chain, C Clamp



Technical Specifications:

Electrical & Power:

- Power Consumption 300W
- Input Voltage AC 110V ~ 240V, 50/60Hz

Others:

- Working Temperature +40° ~ -30°
- Unlimited Colour Mixing Options

Optical Arrangement:

- Beam Angle - 30°
- Reflector on each LED's

Physical & Construction:

- Dimension 600x 400x 260mm
- Weight 5 Kgs
- DmX 3 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20 Rated
- Aluminum Body
- Single Yoke Mount
- MS Body with Black Powder coated finish
- LED Easy View Display

Lamp Source:

- LED SMD Based Source
- RGB 100 x 3W
- 50,000 Hours Burning life

Control:

- DmX 512 Through 3/5 Pin XLR
- 1/3/6 Channel DmX Control
- Manual Mode Operation
- Sound Active Mode Control
- Master Slave Mode



LED WALL WASHER LIGHT

Product Model No. : TDHLWW0014

Product Description : LED WALL WASHER LIGHT

High Quality LED Linear wash light IP65 rated best suitable for Outdoor and Indoor use to provide unlimited color effects for Façade Lighting, Building domes, Background illuminations, Cyclorama Lightings and multipurpose requirements. Light has DmX and other control modes which makes flexible to use for Tv Studio Sets & any mood lighting application.



Accessories: Safety Chain, C Clamp

Technical Specifications:

Electrical & Power:

- Power Consumption 36W
- Input Voltage DC 24V

Optical Arrangement:

- Beam Angle - 30°
- Optional Beam Angle : 15°, 45°
- Field Angle : 32°

Lamp Source:

- LED Source : SMD Based
- Colour Temperature : 3000
- Optional Color Temperature : 1800K, 4000K, 6000K
- CRI : > 70
- Lumens/W : > 110
- Net Luminous Flux : 3960
- No of LED's : 21 No's
- LED Power : 3W
- LED Hours Burning life : 50,000

Control:

- Control Option : ON / OFF Option
- Operation Mode : Manual Mode
- Working Temperature : +55° ~ -30°
- SDCM : < 5

Others:

- Working Temperature +40° ~ -30°
- Unlimited Colour Mixing Options

Physical & Construction:

- Dimension : 1000 x 45 x 115mm
- Ingress Protection : IP65 Rated
- Body Housing : Aluminium Die Casted
- Body Colour : Black / Grey / Custom
- Mounting Type : Clamp / Surface Mount
- Impact Resistance : IK07
- Cooling : Passive Cooling System
- Protection Class : III Class
- Weight : 2.7 Kgs/ 5.94 lbs



LED LASER BAR RGB LIGHT

Product Model No. : TDHLLB015

Product Description : LED LASER BAR RGB LIGHT

High quality laser bar having 4pcs of 200mW, 650nm Red + 2pcs of 50mw, 532nm Green + 2pcs of 500mw, 450nm blue fat beam laser diodes. Single laser diode control. RGB fat laser beam sweeps with 180° tilt angle and makes a great and cost effective beam show.



Accessories: Safety Chain, C Clamp

Technical Specifications:

Electrical & Power:

- Power Consumption 70W
- Input Voltage AC 100V ~ 260V, 50Hz

Others:

- Working Temperature +45° ~ -30°
- LED Display with 4 buttons

Optical Arrangement:

- Scanning Angle - 180°

Physical & Construction:

- Dimension 1000x 84x 173mm
- Weight 6.8 Kg's / 14.96 lbs
- Dmx 3/5 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20 Rated
- Plastic & Metal Body
- Black Powder coated finish

Lamp Source:

- Laser : 4 pic's 200mW fat Red laser diode
- Laser : 2 pic's 50mW fat Green laser diode
- Laser : 2 pic's 500mW fat Blue laser diode
- Laser safety standard : Class 3

Control:

- Dmx 512 Through 3 Pin XLR
- 7/16 Channel Dmx Control
- Auto Mode Operation
- Master Slave Mode
- Sound Active Mode Control



SHARPY LIGHT 7R

Product Model No. : TDHLSR016

Product Description : SHARPY LIGHT 7R

Moving Head Beam effect light 7R Base high bright strong beam, ideal for DJ's, Dance Shows Stage Events, Auditorium Stages, Multipurpose application.

Quick response to the control signal makes it unique.



Accessories: Safety Chain, C Clamp

Technical Specifications:

Electrical & Power:

- Power Consumption 230W
- Input Voltage AC 100V ~ 260V, 50Hz

Lamp Source:

- 230W 7R, 7000K
- MSD Yodn Lamp

Control:

- Dmx 512 Through 3 Pin XLR
- 16 Channel Dmx Control
- Sound Active Mode Control

Physical & Construction:

- Dmx 3 Pin In and Out
- Ingress Protection IP20 Rated
- Plastic & Metal Body
- Black Powder coated finish
- 2Lights in 1 flight case

Features:

- Pan Range – 540° & Tilt Range – 270°
- High Precision Movement
- 14 kinds of color + blank
- 14 Fixed Metal Gobo Patterns
- 8 Rotating Prisms
- Strobe: 0-9 times/sec
- Ballast: Electronic ballast



SHARPY LIGHT 10R

Product Model No. : TDHLSR017

Product Description : SHARPY LIGHT 10R

Moving Head Beam effect light 10R Base high bright strong beam, ideal for DJ's, Dance Shows Stage Events, Auditorium Stages, Multipurpose application.

Quick response to the control signal makes it unique.

Accessories: Safety Chain, C Clamp



Technical Specifications:

Electrical & Power:

- Power Consumption 280W
- Input Voltage AC 100V ~ 260V, 50Hz

Lamp Source:

- 280W 10R, 7000K
- MSD Yodn Lamp

Control:

- Dmx 512 Through 3 Pin XLR
- 16 Channel Dmx Control
- Sound Active Mode Control

Physical & Construction:

- Dmx 3 Pin In and Out
- Ingress Protection IP20 Rated
- Plastic & Metal Body
- Black Powder coated finish
- 2Lights in 1 flight case

Features:

- Pan Range – 540° & Tilt Range – 270°
- High Precision Movement
- 14 kinds of color + blank
- 14 Fixed Metal Gobo Patterns
- 8 Rotating Prisms
- Strobe: 0-9 times/sec
- Ballast: Electronic ballast



SHARPY LIGHT 15R

Product Model No. : TDHLSR017

Product Description : SHARPY LIGHT 15R

Moving Head Beam effect light 15R Base high bright strong beam, ideal for DJ's, Dance Shows Stage Events, Auditorium Stages, Multipurpose application.

Quick response to the control signal makes it unique.

Accessories: Safety Chain, C Clamp



Technical Specifications:

Electrical & Power:

- Power Consumption 330W
- Input Voltage AC 100V ~ 260V, 50Hz

Lamp Source:

- 330W 15R, 8500K
- MSD Yodn Lamp

Control:

- Dmx 512 Through 3 Pin XLR
- 16 Channel Dmx Control
- Sound Active Mode Control

Physical & Construction:

- Dmx 3 Pin In and Out
- Ingress Protection IP20 Rated
- Plastic & Metal Body
- Black Powder coated finish
- 2Lights in 1 flight case

Features:

- Pan Range – 540° & Tilt Range – 270°
- High Precision Movement
- 14 kinds of color + blank
- 14 Fixed Metal Gobo Patterns
- 8 Rotating Prisms
- Strobe: 0-9 times/sec
- Ballast: Electronic ballast



LED MOVING WASH LIGHT RGB

Product Model No. : TDHMW018

Product Description : LED MOVING WASH LIGHT RGB

Project cost-effective hot-selling product: 15 x 19LED moving head wash zoom. LM285 uses 19 RGB three-in-one high-brightness LED15W LED lamp , the angle is linearly adjustable from 7.9-38°, the color mixing is perfect, and the product weight is 7.7KG. A small angle can show a clear spot, and a large angle wash effect is not black in the middle.

The contrast between the small angle and the large angle of this product is small. The entire focusing stroke has only two color segments, which has been highly praised by professional customers.

Accessories: Safety Chain, C Clamp



Technical Specifications:

Electrical & Power:

- Power Consumption 285W
- Input Voltage AC 100V ~ 260V, 50Hz

Lamp Source:

- 285W , 8500K
- MSD Yodn Lamp

Control:

- Dmx 512 Through 3 Pin XLR
- 16 Channel Dmx Control
- Sound Active Mode Control

Physical & Construction:

- Dmx 3 Pin In and Out
- Ingress Protection IP20 Rated
- Plastic & Metal Body
- Black Powder coated finish
- 2Lights in 1 flight case

Features:

- Pan Range – 540° & Tilt Range – 270°
- High Precision Movement
- 14 kinds of color + blank
- 14 Fixed Metal Gobo Patterns
- 8 Rotating Prisms
- Strobe: 0-9 times/sec
- Ballast: Electronic ballast



LED MOVING WASH LIGHT RGB

Product Model No. : TDHMW019

Product Description : LED MOVING WASH LIGHT RGB

Project cost-effective hot-selling product: 40 x 7LED moving head wash zoom. LM285 uses 7 RGB three-in-one high-brightness LED15W LED lamp , the angle is linearly adjustable from 7.9-38°, the color mixing is perfect, and the product weight is 6.7KG. A small angle can show a clear spot, and a large angle wash effect is not black in the middle.

The contrast between the small angle and the large angle of this product is small. The entire focusing stroke has only two color segments, which has been highly praised by professional customers.

Accessories: Safety Chain, C Clamp



Technical Specifications:

Electrical & Power:

- Power Consumption 280W
- Input Voltage AC 100V ~ 260V, 50Hz

Lamp Source:

- 280W , 8500K
- MSD Yodn Lamp

Control:

- Dmx 512 Through 3 Pin XLR
- 16 Channel Dmx Control
- Sound Active Mode Control

Physical & Construction:

- Dmx 3 Pin In and Out
- Ingress Protection IP20 Rated
- Plastic & Metal Body
- Black Powder coated finish
- 2Lights in 1 flight case

Features:

- Pan Range – 540° & Tilt Range – 270°
- High Precision Movement
- 14 kinds of color + blank
- 14 Fixed Metal Gobo Patterns
- 8 Rotating Prisms
- Strobe: 0-9 times/sec
- Ballast: Electronic ballast



HALOGEN LIGHT LIGHT

Product Model No. : TDHHL20

Product Description : HALOGEN LIGHT 500/1000W

500/1000W Halogen light with aluminum Asymmetrical reflector, double pole micro switch, 290x270mm color frame, R7s lamp base, 2-10m throw, 5,3 kg weight in 10806050 Black, (10806051) white/ (10806052) Silver color.
Type: INNO A 1000 of LDR or equivalent



Accessories: Safety Chain, C Clamp

Technical Specifications:

Electrical & Power:

- Power Consumption 500/1000W
- Input Voltage AC 85V ~ 265V, 50/60Hz

Others:

- Working Temperature +40° ~ -30°

Lamp Source:

- Halogen Based Source

Physical & Construction:

- Dimension 350x 260x 110mm
- Weight 3.5 Kgs
- Dmx 3 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20 Rated
- Aluminum Body
- MS Body with Black Powder coated finish

Control:

- Dmx 512 Through 3 Pin XLR
- 1/3/6 Channel Dmx Control
- Manual Mode Operation
- Master Slave Mode



PROFILE SPOT LIGHT 1000W

Product Model No. : TDHPF021

Product Description : PROFILE SPOT LIGHT 1000W

1000W profile spot light with Double condenser & zoom, 68mm dia. Glass reflector, 185 x185mm colour frame, narrow beam angle, GX9.5 lamp base, 5-25m throw, 6 Kg net weight in 10853020 Black colour. Type:NOTA 8/22 of LDR or equivalent



Accessories: Barndoors, Safety Chain, C Clamp

Technical Specifications:

Electrical & Power:

- Power Consumption 1000W
- Input Voltage AC 110V ~ 220V, 50/60Hz

Others:

- Working Temperature +40° ~ -30°
- Strobe option adjustable 1 ~ 25 times/Sec

Optical Arrangement:

- Beam Angle 19°, 26°, 36°, 50°

Physical & Construction:

- Dimension 300x 700x 310mm
- Weight 6 Kgs/ 13.2 lbs

Lamp Source:

- T11 Based Source 3200K
- Colour Temperature 3200K
- 50,000 Hours Burning life

Control:

- Dimmer based



CYCLORAMA LIGHTS 1000W

Product Model No. : TDHCYL22

Product Description : Cyclorama Lights 1000W Black

The Cyclorama Lights 1000W Black is a high-performance lighting solution designed for professional stage and studio applications. Featuring a 1000W power output, this light ensures bright and even illumination, making it ideal for backdrop lighting. It operates at 240V and has an IP33 rating, providing reliable performance in controlled environments. The HF-1000 type design includes an aluminum anodized finish reflector, which enhances light distribution for optimal coverage. Equipped with two compressible recessed single-contact holders, it ensures secure lamp placement. With a sturdy build and a weight of 7.5 kg, this cyclorama light is both durable and efficient for professional use.



Technical Specifications:

Lighting:	Color Black
IP Rating:	IP33
Power:	1000W
Weight:	7.5 kg
Type:	HF-1000
Voltage:	240 V
Reflector:	Aluminium Anodized Finish
Holder:	2 nos. compressible recessed Single contact App



DMX SPLITTER

Product Model No. : TDHDMX020

Product Description : DMX SPLITTER

Opto-isolated RDM enabled DmX splitter unit complete with Power In and slow blow safety fuse, 8 DmX Output channels 5 Pin XLR or 3 Pin XLR Customized in and out supporting DMX operation as per DmX 512 protocol. Splitter unit is designed to cater for small as well as larger networks to have effective distribution of signal and amplifying the signal voltage to keep it uniform through all 8 outgoing ports.



Technical Specifications:

Electrical & Power:

- 0-240V AC, 45-63Hz

Optical Arrangement:

- Scanning Angle - 180°

Control:

- DMX 512 Protocol/ RDM(Optional)

Features:

- In & 8 Isolated Output DMX
- Ideal for Small & Big DmX Distributions
- XLR 5 Pin or 3 Pin Combinations
- Slow blow inbuilt fuse
- Dual mode setting for A & B output
- Memory to retain last frame data
- Steady Signal Distribution
- Master MCU 32 Bit Micro controller
- Quick data processing
- No delay transmission DmX signals
- Black Powder coated housing
- Earth protection against Electrical shock
- Fuse protected Chassis mount connector
- IEC 10A Power input
- Dimensions in mm 482 x 44 x 128mm
- Weight 2.9 Kgs



ELECTRONIC 6 CHANNEL DIMMER

Product Model No. : TDHDMX021

Product Description : 6X4KW CHANNEL DIMMER



Technical Specifications:

| Auto Sensing of supply voltage (140-260VAC) | Automatic supply frequency tracking 45-60 HZ. | Linear dimming curve. | Neon'Load present' indicators. | High Quality RF noise suppression. | Single, Dual or three phase operation. | Radio Frequency Interference suppression to better than BS-800 guidelines. | 6 channels - 99.5% duty circle. | 19" Rack Mounting - 4U | Phase monitoring Neon. | Control Signal monitoring LEDs. | 6 Channel rack mounting DIMAT dimming pack with holding handles. | 0-10 Volts control input by one 8-pin Din socket. | Soft start function at power up. | Lamp pre-heat level selector for longer lamp life. | Individual channel test controls. | Individual channel blown fuse indicators. | Individual channel status indicators | Available model six-channels x2 (Tour series in fly pack) | Having 18 Nos. 15 Amp. Multi Socket for using the direct points.

Features:

- Usage/Application : USED FOR NON DMX LIGHTS
- Shape : RECTANGLE
- Brand : TDH
- Power/Voltage : 110-230V
- Power Source : AC
- Color : BLACK
- Material : ALUMINIUM/MS
- Warranty : 1 YEAR
- Model Name/Number : TDH ED100
- Voltage : 110-230
- Weight : 7 KGS
- Total load capacity: 24 KW
- Country of Origin : Made in India



12 CHANNEL DIMMER

Product Model No. : TDHDMX022

Product Description : 12 CHANNEL DIMMER



Technical Specifications:


| Auto Sensing of supply voltage (140-260VAC) | Automatic supply frequency tracking 45-60 HZ. | Linear dimming curve. | Neon'Load present' indicators. | High Quality RF noise suppression. | Single, Dual or three phase operation. | Radio Frequency Interference suppression to better than BS-800 guidelines. | 12 channels - 99.5% duty circle. | 19" Rack Mounting - 4U | Phase monitoring Neon. | Control Signal monitoring LEDs. | 12 Channel rack mounting DIMAT dimming pack with holding handles. | 0-10 Volts control input by one 8-pin Din socket. | Soft start function at power up. | Lamp pre-heat level selector for longer lamp life. | Individual channel test controls. | Individual channel blown fuse indicators. | Individual channel status indicators | Available model twelve-channels x2 (Tour series in fly pack) | Having 12 Nos. 15 Amp. Multi Socket for using the direct points.

Features:

- Usage : 12 Channel 48KW Dimmer Pack •Shape : RECTANGLE
- Brand : TDH
- Power/Voltage : 110-230V
- Power Source : AC 100-240V, 304w
- Color : BLACK
- Material : ALUMINIUM/MS
- Warranty : 1 YEAR
- Model Name/Number : TDH ED100
- Protocol : DMX-512
- Weight : 13.5 KGS
- Country of Origin : Made in India



12 CHANNEL WALL MOUNT DIMMER

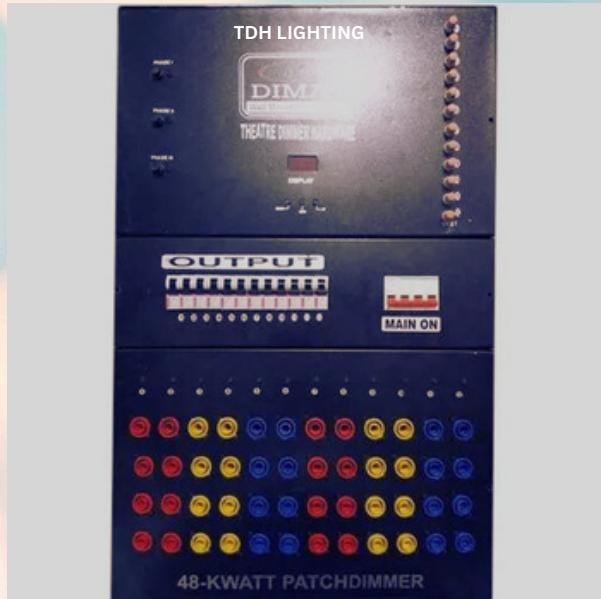

Technical Specifications:

Product Description : 12 Channel Wall Mount Dimmer

Product Model: TDH WALLMOUNT DIMMER 12 CHANNELS(WMD-100)

Power Input: 210V-240v

12 channel modular digital dimmer

Dimensions (WXDXH)=560X170X760MM

Rugged construction ensures long life even under the most demanding conditions.

Single, three phase operation.

MCB breakers

Individual channel test controls

Wattage: 48kw

Neon Load present indicators

A 12CH wall mount electronic dimmer is an electronic device used to control the brightness of 12 separate lights or light fixtures. It is mounted on a wall and operates by adjusting the voltage supplied to the light, effectively reducing its brightness. This type of dimmer is often used in residential or commercial settings to create mood lighting, conserve energy, and extend the life of light bulbs. It typically operates using a switch or slider, and may include additional features such as adjustable minimum brightness and smooth dimming.

In addition to controlling the brightness of lights, 12CH wall mount electronic dimmers can also help reduce energy consumption. By adjusting the voltage supplied to the lights, the dimmer can reduce the amount of power used, which can result in lower electricity bills. Additionally, electronic dimmers can extend the life of light bulbs by reducing the amount of heat generated during operation, which can reduce the risk of bulb failure.



3 PHASE BOARD



Technical Specifications:

Product Description : 3 Phase Board

3 phase distribution boards are panels that house the circuit breakers, ground leakage protection units and fuses that are used to distribute power to individual consumer points or circuits within a building. They are generally used in larger industrial, public and commercial settings although can also be used within some domestic environments.

Flight Case Distribution Box With CEE forms , Schuko Sockets , Indian sockets etc...

Specail Features Like :

Under/Over Voltage Protection

Neutral Failure Protection



1024 MINIPEARL PANEL

Product Model No. : TDHMP023

Product Description : 1024 MINIPEARL PANEL



Technical Specifications:

Product Description : DmX Controller Mini Pearl Panel

DMX channel : 1024, Fixture: 96, Channels for each fixture 40 primary + 40 fine tune

Library: Avolite Pearl R20 library supported

Re-patched Fixture address: Yes

Swop Pan/Tilt: Yes, Reversed channel output: Yes

Channel slope modification: Yes, Scene: 60

Scenes to run simultaneously: 10, Scene step: 600

Time control of scenes: Fade in/out, LTP slope

Shapes for each scene: 5, Scene and dimmer by slider: Yes Interlocked scene: Yes,

Shape generator: Shapes of Dimmer, Pan/Tilt, RGB, CMY, Colour, Gobo, Iris and Focus

Shapes to run simultaneously: 5, Master slider: Global, playback,

fixture , Real time blackout : Yes, Channel value by Slider : Yes,

Dimmer by slider : Yes, USB Memory:FAT32 supported



PILOT 2000 PANEL

Product Model No. : TDHPL024

Product Description : PILOT 2000 PANEL



Technical Specifications:

Product Description : Pilot 2000 Panel

Universal DMX512 Controller, Able to control Upto 40 Lights.

Each Light with maximum of 36 Channel in Total.

Can control upto 192 Dimmer Channel.

40 Programs or Chases, M Chases, Presets each Program

(Chase, M-chase, Preset) upto 40 Steps, Able to use 4 Programs.

4 Chases, 4 M-chases, Presets at same time.

Can create new unit Internal Library.

Able to Backup/ Update data to from PC with RS23.

MIDI Input/ MIDI Output.

Internal MIC or Sound input.

Product colour : Black

DMX connection : 3 pin XLR


Power supply : 120 - 230VAC 50Hz



DMX CONTROLLER 384

Product Model No. : TDHPL025

Product Description : DMX CONTROLLER 384

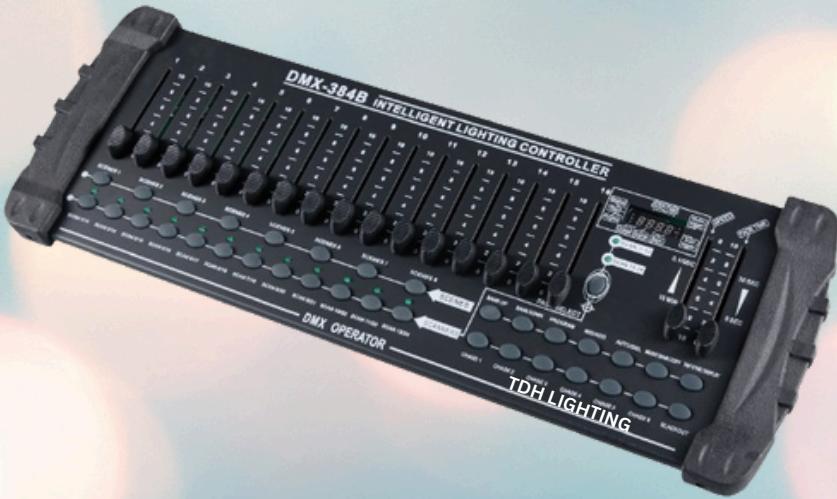

Technical Specifications:

Product Description : DmX Controller 384

The DMX 384 controller is a DMX hardware controller for lighting effects that are compatible with DMX protocol. It will control up to 12 fixtures with 32 DMX channels each (384 total channels). There are 30 banks with 240 total programmable scenes. The DMX 384 controller has 16 control faders with 2 page banks. With DMX 384 Controller, you can record up to 6 chases with separate fade times and step speeds.

Product colour : Black

DMX connection : 3 pin XLR

Power supply : 220 - 240VAC 50Hz

Dimensions (L x W x H) : 520 x 190 x 80mm

Weight (kg) : 2.450



DMX CONTROLLER 512

Product Model No. : TDHPL026

Product Description : DMX CONTROLLER 512



Technical Specifications:

Product Description : DmX Controller 512

TDMX-512/1990 standard,192 DMX Channels

Large Digital LCD display with back-lighted.

Control up to 16 intelligent lights

(12 DMX Channels per fixture).

Operation via Manual or Chase Step.

16 intelligent Fixture chase steps within 100 scenes

for each have the black out function sound run function.

Product colour : Black

DMX connection : 3 pin XLR

Power supply : 120 - 230VAC 50Hz

AUDITORIUM HORIZONTAL MAIN CURTAIN



Technical Specifications:

Product Description : Auditorium Horizontal Main Curtain

Auditorium Curtains provides an extensive collection of Horizontal/Main motorized curtains system to our customers. The complete automatically motorized Stage curtains system with additional modified Gearbox fitted with sealed bearings self-lubricating center split overlapped curtains both sides opening fully automatic Stage Curtain fixing steel nails track made out of 450 GSM made out of, double gathering Velvet Fabric Curtain cloth drapery horizontal sliding arrangement complete with fixing rails, brackets and motorized operation complete with runners, master runners, pulleys, 3mm steel wire rope, 1 HP Motor (Crompton or Godrej) 2 Nos Air Breaker Contractors (SCHNEIDER), 2nos. Micro Switches for auto stop, 3 nos push buttons for forward. All rollers are sliding with roller clamp; The curtain should be half of full width operated from control panel with control switches.



AUDITORIUM HORIZONTAL BACK CURTAIN




Technical Specifications:

Product Description : Auditorium Horizontal Back Curtain

Auditorium Curtains provides an extensive collection of Horizontal/Back motorized curtains system to our customers. The complete automatically motorized Stage curtains system with additional modified Gearbox fitted with sealed bearings self-lubricating center split overlapped curtains both sides opening fully automatic Stage Curtain fixing steel nails track made out of 350 GSM made out of, double gathering Glazed Cotton Curtain cloth drapery horizontal sliding arrangement complete with fixing rails, brackets and motorized operation complete with runners, master runners, pulleys, 3mm steel wire rope, 1 HP Motor (Crompton or Godrej) 2 Nos Air Breaker Contractors (SCHNEIDER), 2nos. Micro Switches for auto stop, 3 nos push buttons for forward. All rollers are sliding with roller clamp; The curtain should be half of full width operated from control panel with control switches.



AUDITORIUM FRILL

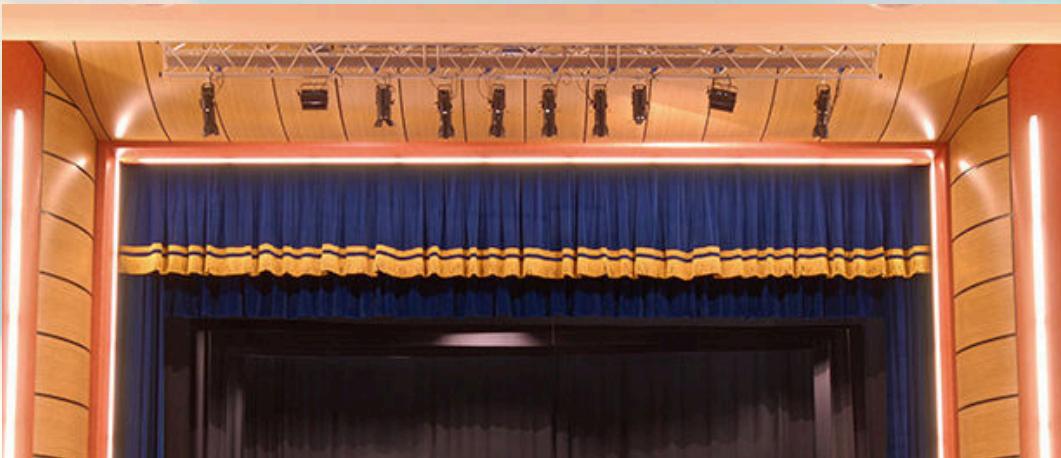

Technical Specifications:

Product Description : Auditorium Frill

Auditorium Curtains provide an extensive collection of Frills to our customers. Our offered Frills is designed and manufactured for School, College, Auditorium & Drama Theaters as well as Cinema Theaters. The offered system is designed using modern technology and premium grade components by our skilled professionals. Besides, clients can avail this system at most economical price.



AUDITORIUM SIDE WINGS



Technical Specifications:

Product Description : Auditorium Side Wings

Stage Wings also known as Leg Curtain or Wing Curtains. Stage Wings are narrow and tall, used to hide the side of the stage from the audience's view. They also provide masked wings for actors to enter and exit the stage. They are almost always black. These wings are used on sides of front curtain. Wings separate the different sections of the stage and provide an extra space for a new scene. They differentiate between front stage mid-stage and backstage. Wings also help to mask the speaker system, panels and sidelights. They are usually flat panels, but they can also be curved or wavy. They serve the purpose of distributing sound evenly towards the entire audience and are designed in the manner to bounce the sound back to the audience in the best way possible. Wings reduce echoing and increase noise absorption. They are indispensable in masking out behind the scenes happening. Blackouts and backdrops can also be stored beside the wings as a proprietary to the main performance. Some of these come with borders and skirts while others seem to blend into the curtains.

AUDITORIUM CYCLORAMA SCREEN




Technical Specifications:

Product Description : Auditorium Cyclorama Screen

A cyclorama, also known as “cyc”, is the largest single piece of landscape in the theatre. Cyclorama Screen is elevated along the stage rear wall at a distance of approx. 2000 mm. A heavy flame retardant fabric is stretched tightly to make a flat and smooth surface cyclorama screen. The cycs are used to create illusionary effects with the help of light, colour and other props. They are both front lit and back lit, depending on the material used and its conjunction with scrims. These dramatical influences are most commonly found in operas and dances that require sky-like appeal, special mood and light absorption. Cycloramas have versatile uses from providing extra effects to full display panel. Apart from being a cyc wall, similar extensions can also be installed to create an illusion of infinity room. These trims also create a skirting and a larger background to the main cyc wall. In some cases the overleaf is specially coloured to blind the rear stage. They are not only subject to theatres, but are extensively used in film studios, private studios, school halls, auditoriums, drama rooms, presentation rooms and wherever a show has to begin. The cycloramas come in different shapes, sizes, colours and fabric. Straight screens have been a popular choice for their convenience and versatility of use.



AUDITORIUM MOTORIZED LIGHT BAR

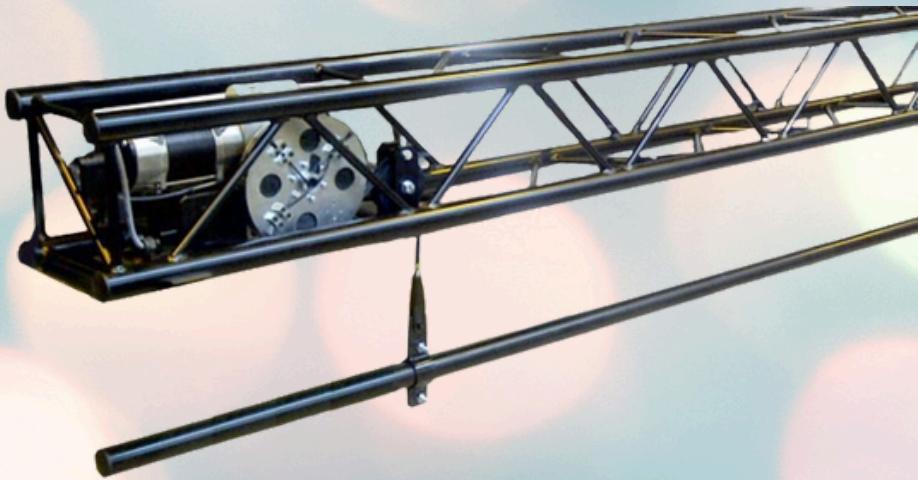


Technical Specifications:

Product Description : Auditorium Motorized Light Bar

Stagecurtains.in deals in Motorized Lighting Bar, an electrical pilewind winch is mounted within the truss, along with a number of drop pulleys which allows a quick and easy method of raising and lowering lighting bars, scenery backdrops or similar suspensions. Our Light Bar are known for its durability, corrosion resistance, dimensional accuracy and elegant designs. It is perfectly suited for auditorium, theatres and school applications due to its compact and modular design. Motorised lighting bars are a complex system of chains and cables allowing lights to be suspended. The entire unit is totally motor-controlled. The hoist and gearbox are used only matching to the safety standards and the brakes all totally reliable.

Considering the weight of the lights, mode of functioning, and the lighting control and operation, it remains suspended in mid-air via a plak. They are fitted into the network of grid and sky deck, become a very efficient management system, lighting system, noiseless operation, flexible gearbox, sturdy weight, bearing and easily fitting. The motion can be controlled by the crew why lowering or raising the equipment. It is always better to know the maximum load limit determined so that disasters are avoided. The motorised lighting bars are highly dynamic and resistant to most wear and tear. The Other control systems never interfere with the present lighting system and everything is easily manageable from a single console. The motorized bar allow to minimise the burden of trolleys pulleys and other heavy cable and machinery. Many of these accessories can be implanted into the wall.

AUDITORIUM FIXED LIGHT BAR

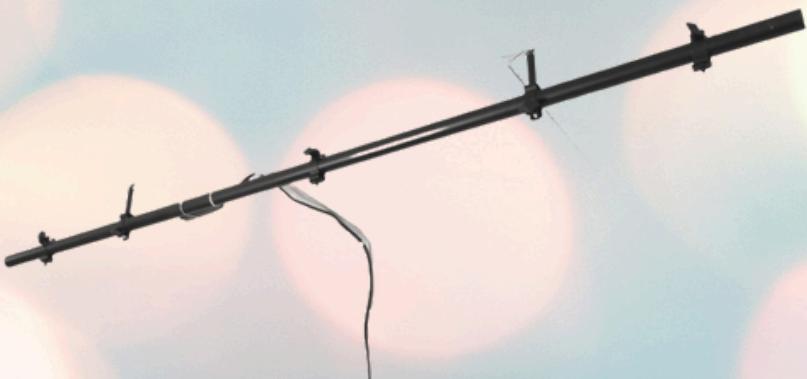

Technical Specifications:

Product Description : Auditorium Fixed Light Bar

Material : Mild steel pipe

Size : 48mm outer dia, 40 nominal bore

Suspension : Through suspenders as per site conditions

Dimension : Customised as per the site / project requirement

Size : 48mm outer dia, 40 nominal bore / customised


Finish : Powder coated with matt black finish paint

Combination : Customized bar length

Construction : Dual barrel arrangement with dual construction

Additional : End caps on the pipe end, upper pipe of dual construction is used to anchor the bar with the suspension system and lower pipe is effectively used to hang the light fixtures.

AUDITORIUM STAGE SIDE LADDER

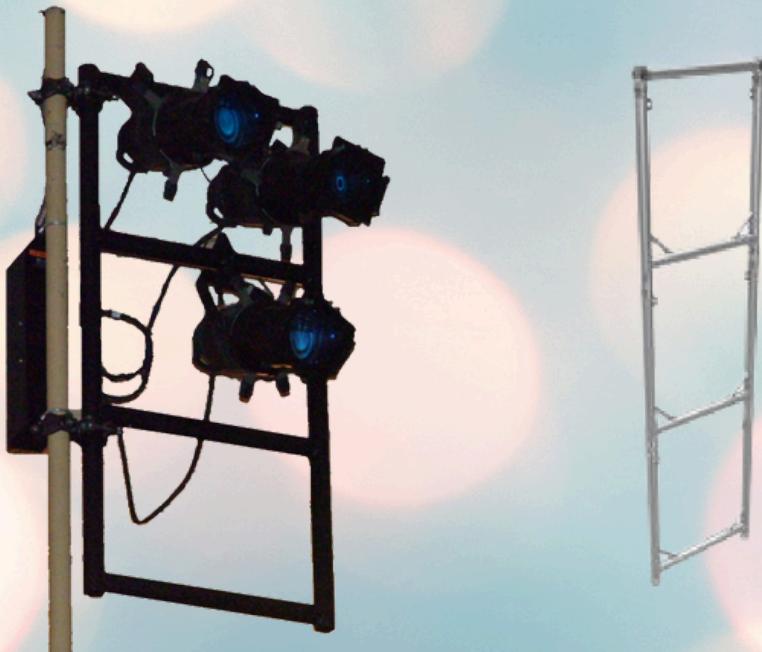

Technical Specifications:

Product Description : Auditorium Stage Side Ladder

Type : Pivoted or fixed type

Suspension : Through spud & trolley,

Material : Mild steel round pipe

Size : 48 OD, 40 nominal bore

Finish : Powder coated with matt black finish paint

Technical Parameters :-

Combination : 600mm wide with Height Variable / Custom made sizes

Construction : Single construction with cross connecting pipes at every 600mm or custom made sizes

Additional : If pivoted on trolley, ladder can be moved along the track or adjusted as required



3 CORE 1.5MM WIRE

PVC WIRE

PVC insulated PVC sheathed, 3 Core 1.5 sqmm FRLS copper Cables. Rambot 3 core round copper wires and cables 1.5mm for domestic and industrial electric connections (Colour Black) 100 Meter.



DMX WIRE

Designed for perfect data and control transmission, this DMX cable features 3 bare copper conductors arranged in one high quality twisted pairs along with an aluminum foil shield and a tinned copper braided shield. Along with its 120 ohm characteristic impedance, this cable meets all the ESTA guidelines for a True DMX512 cable.



XLR M&F

DMX Points 3pin XLR with wire.





MCB BOX

16way

Power 220V, 50 - 60 Hz
Material MS Powder Coated



C-CLAMP & SAFETY CHAIN

C Clamp

Material: Iron
Color: Black
Net Weight: 350g
Maximum Load: 30kg

Model No.- CCT008



Safety Chain

3 mm Rope Metal Wire with lock
Weight Capacity 100.0Kg

Model No.- SCT011

FIXED PIPE GRID

Material: Mild Steel Pipe

Suspension : Through Suspenders


Grid Movement: Fixed Grid

Dimension: Customized

Size: 48mm Outer dia,40 nominal bore

Min Height: 200mm

Finish: Powder coated with matt black

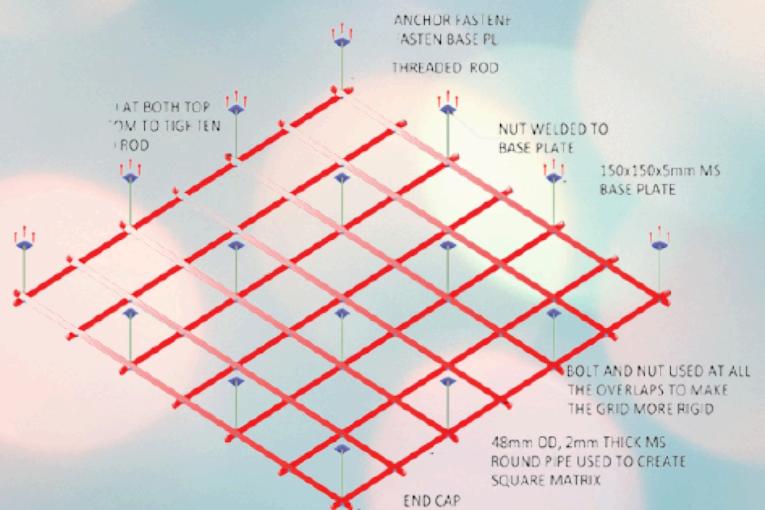

FIXED LIGHTING BAR

Material: Mild Steel Pipe

Suspension : Through Suspenders


Grid Movement: Fixed Bar

Dimension: Customized

Size: 48mm Outer dia,40 nominal bore Finish:

Powder coated with matt black

Model No.- FLBT008

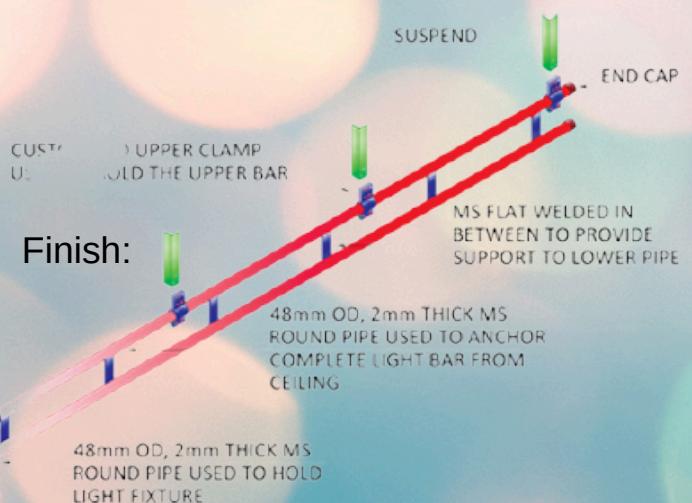

MANUAL CURTAIN TRACK

Material: Mild Steel, Cotton Ropes, Aluminium extruded Suspension : Through Suspenders

Grid Movement: Fixed Grid


Dimension: Customized

Size: As per Condition

Finish: Powder coated with matt black texture

Type: Horizontal Type opening

Model No.- MCTT004

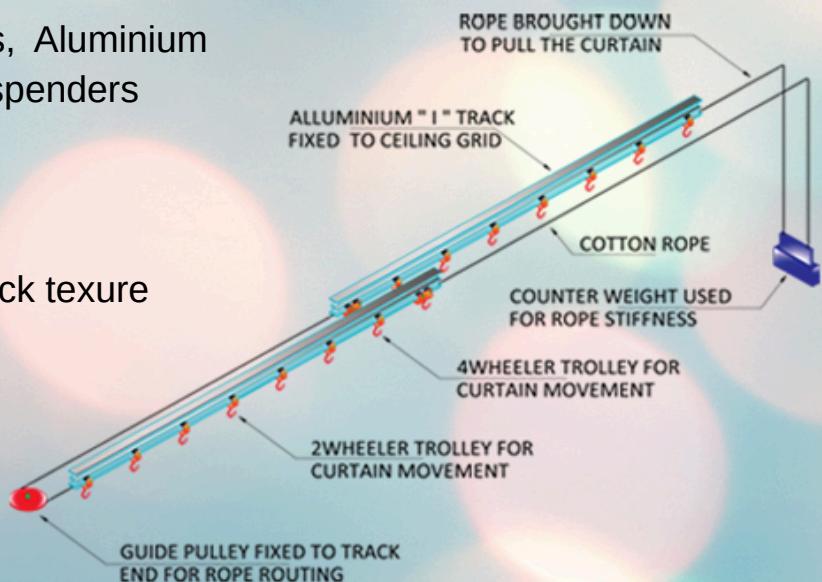

MOTORISED CURTAIN TRACK


Material: Mild Steel, Aluminum extruded, GI wires ropes Suspension: Through Suspenders

Type: Horizontal type opening

Size: 10-16m standard

Finish: Powder coated with matt black paint

Model No.- MCTT008

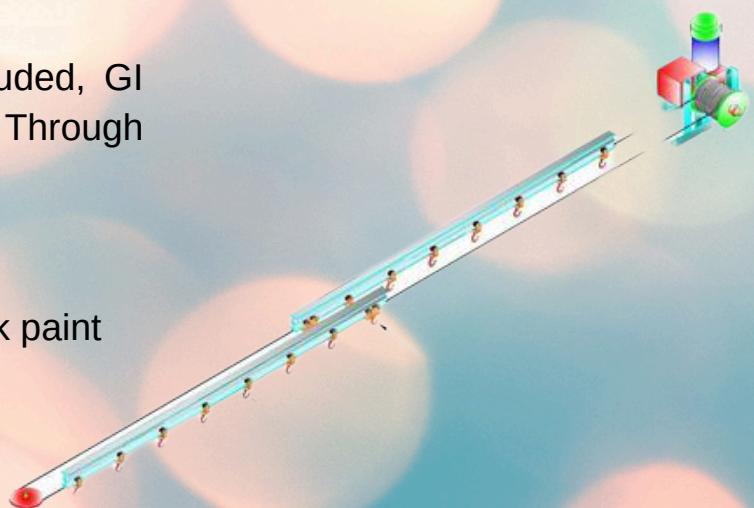

STAGE SIDE WINGS

Material: Mild Steel square pipe


Suspension: Through spud & trolley

Size: 25mm outer diameter

Finish: Powder coated with matt black

paint Type: Pivoted or fixed type

Construction: Single & Dual of pipe as per design

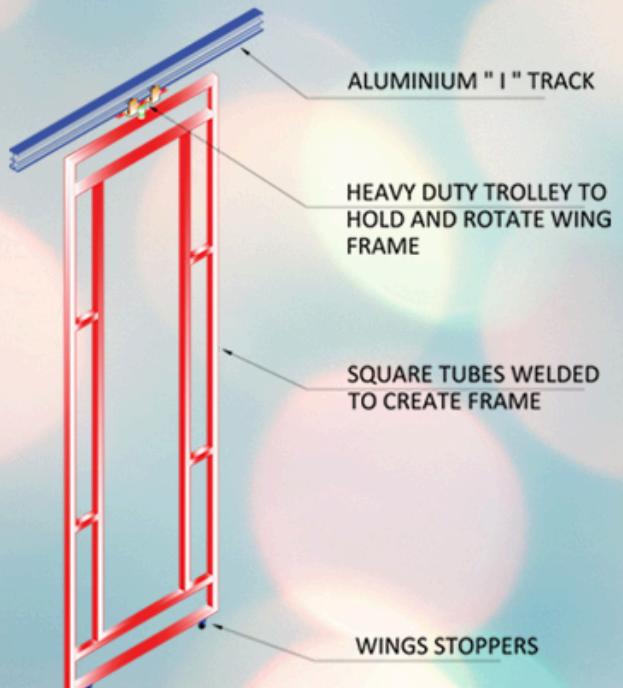

Model No.- SSWT006


TRACK BEAM SYSTEM

Material: Aluminum

Suspension: Spud & Trolley

Type: Fixed/Manually Moveable

Finish: Powder coated with matt black paint

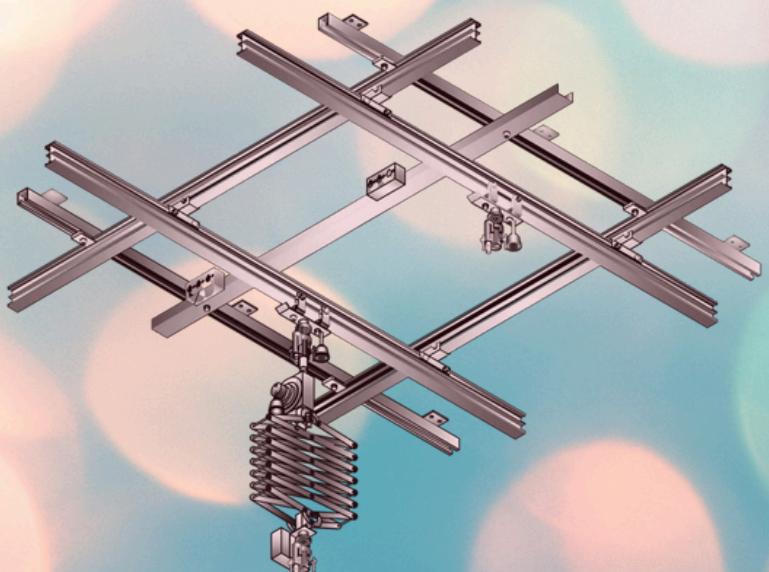


Model No.- TBST003



DRAPERY

Description:-

Valance or Scallop is the beautifying cloth arrangement at the front of the Stage just before the Apron area. The straight cloth finish at the bottom of the fabric is named Valance and Half circled finish at the bottom is named as Scallop of Main Frill. These are extensively used for theatre stage systems to have a grand look to the stage and to hide lighting bars from audience view.

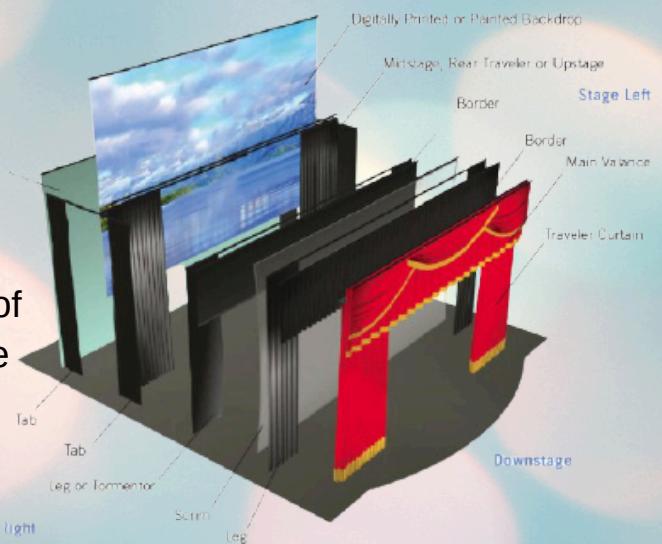

Model No.- DRPT003

1500W SMOKE MACHINE

Operation Mode Wireless, Wired,
Remote Weight 5 Kgs. Approximately
Tank Capacity 3 Ltrs.
Coverage 10 Mtrs.

Model No.- SMT015





STAND, CLAMPS & GRIPS



Model No.- STDT05



Model No.- CSDT09



Model No.- GBST012



Model No.- AFCT08



WHY US

- Industry leading prices
- Qualitative products
- Ability to undertake bulk orders
- Timely deliveries

REACH US



B-28, Ground Floor,
Sector-60 Noida 201301



+91 9811335569



dinesh.ce08@gmail.com



TDH

Theatre Dimmer Hardware