



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

- a.HOUSING:PA66 BLACK  
b.CONTACT:PHOSPHOR BRONZE  
(SURFACE PLATING: Au1u")

SEE ORDERING INFORMATION

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX  
b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN  
c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL  
d.OPERATING TEMPERATURE: -25° C~ +85° C

ORDERING INFORMATION

BH-18650-B\*\*\*002

电池盒

电池型号

SMT 180° TYPE

PLATING:

A-Au1U"

J-Ni100U"~120U"

K-Sn100U"~120U"

MATERIAL:

1A-PBT BLACK

1B-PA66 BLACK

2A-PPA BROWN

2B-PPA BLACK

3A-PPS BROWN

3B-PPS BLACK

4A-LCP WHITE







4B-LCP BLACK

5A-PA9T BLACK

工程部

2018-11-14

LQ. HUANG

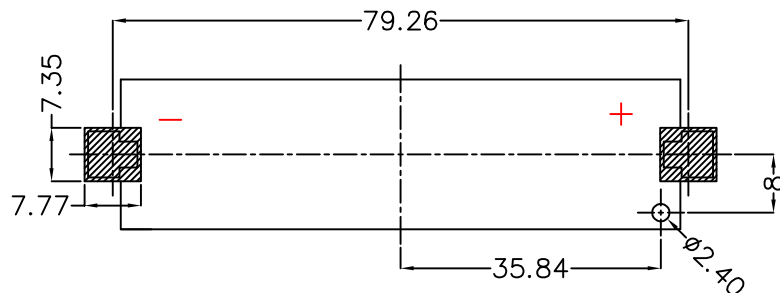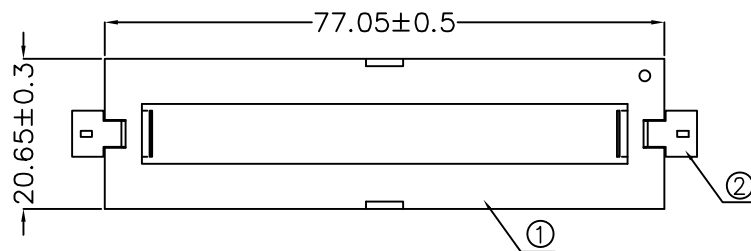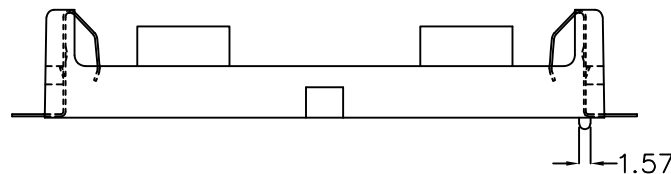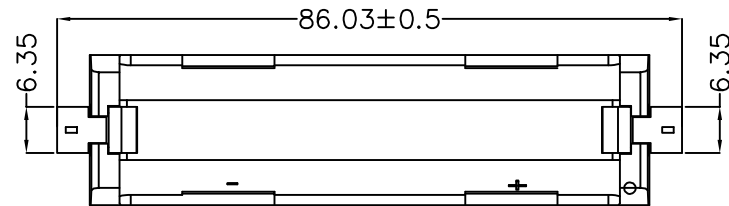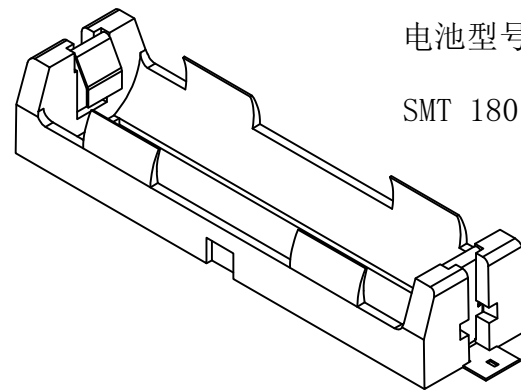

PCB Layout Diagram

Bottom View

2	TERMINAL	1	PHOSPHOR BRONZE, T=0.35MM	Au-Plating
1	HOUSING	1	PA66	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美阳 www.meiyangdz.com					
DECIMALS:	ANGLES:	DSND	YangFeng	DATE	2018-11-14	TITLE:	
X :±0.30	X :±1°	CHKD	ZhouRuicai	DATE	2018-11-14	电池盒BH-18650-1J Au SMT	
X.X :±0.25	X.X :±0.5°	APVD	XueShunYong	DATE	2018-11-14	PART NO.:	
X.XX :±0.20		WEIGHT:		SCALE:	SIZE: A4	VIEW:	BH-18650-B1BA002
X.XXX :±0.10		SHEET 1 OF 1		UNIT: mm	REV.: A/0	OBJECT: MY	DRAW NO.:WD-CP-0088