
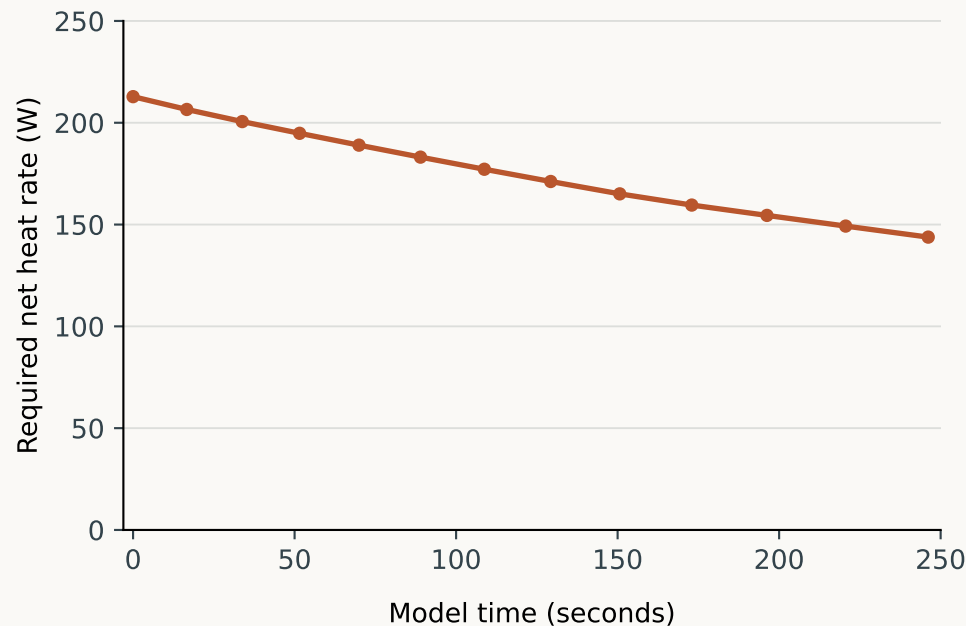


Conditional contact drying

246.16 s model time | 17 g water removed | 43.01 kJ net heat

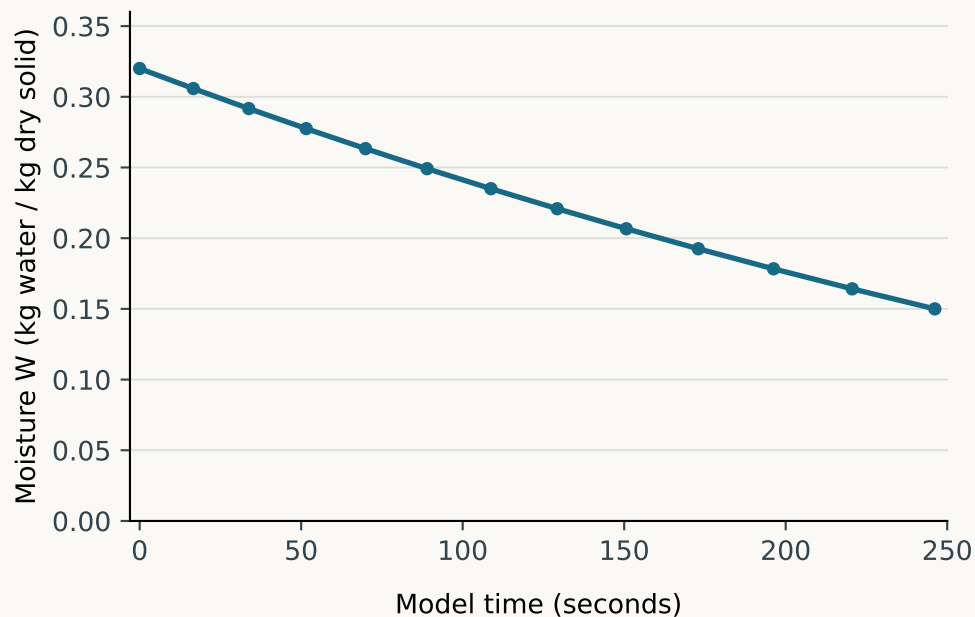

Prescribed 90 C; 0.1 kg dry solid; 0.02 m² nominal heated area; vapor pressure 1000 Pa.
13 calculated points joined by lines. Not measurements or brick-internal transport.
Transfer of the published rate to these conditions has unknown model error.