BEOLIVING *INTELLIGENCE*

HARDWARE SPECIFICATIONS

Connectivity
Ethernet with PoE 802.3af
USB (loads up to 500mA)

Power
5V DC 3W
Heat output: 10.24 BTU/hr
Connector:
• Barrel jack
• [+] pin; [-] sleeve
• 5.5mm x 2.1mm
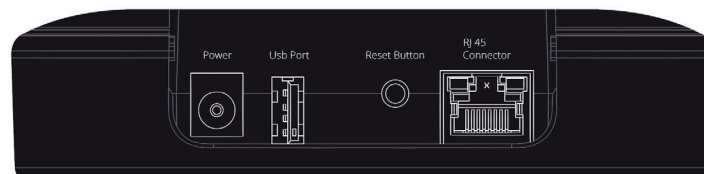
Operating Temperature Range
0°C to 60°C

Dimensions
Length: 127mm
Width: 127mm
Height 30mm

Accessories included in the box
5V, 2A (10W) AC/DC Wall Adapter
Wall/Ceiling Bracket

CONNECTION PANEL

Power Powers the BLI.
USB Port Used for service purposes.
System Reset Button Press & hold for 8 seconds to reboot the system.
RJ 45 Connector For connecting the BeoLiving Intelligence to a local network (PoE capable).