

BEOLIVING INTELLIGENCE

GENERATION 3

HARDWARE SPECIFICATIONS

Connectivity

Ethernet

USB 2.0 (500mA @ 5V)

Power

5V, 3A USB-C connector

RTC

Real time clock

Temperature Range

Operating: -10°C to 60°C

Storage: -40°C to 85°C

Dimensions

Length: 12 cm

Width: 12 cm


Height 3,2 cm

Weight: 195 gr

Accessories included in the box

- 5V, 3A (10W) AC/DC Wall Adapter
- Wall/Ceiling Bracket
- US, UK, AU and EU plug adapters

CONNECTION PANEL

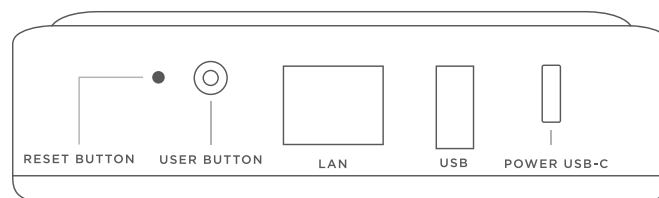

Located on the back of the BLI:

- System Reset Button: Press & hold for 8 seconds to reboot the system.
- User Button: This button is intended for user confirmation and button function input. For more information refer to Button Functions section.
- LAN Connector: For connecting the BeoLiving Intelligence to a local network.
- USB Port: The USB port can be used for connections via RS232 or for service purposes.
- Power USB-C: Powers the BLI.

Please note that BeoLiving Intelligence generation 3 can be only powered by the USB-C connector