SINK MIXER

IRON-CAGE-BOTTOM-BASE-SLAB-CEMENT,JEERA-GITTI,ST0NEDUST,TISCON-6MM-RODS-INSIDE-SLAB=8FEET9INCHx1.5Inx3IN

1 INCH HAS 8 EQUAL PARTS , a PART, SPOKEN AS 1by8, AND WRITTEN AS 1/8.

AOSMITH KLASSE GEYSER 25 LITRES INPUT: USE JAGUAR 2-ANGULAR STOP COCK KUP-35053PM FOR DIRECT INTAKE AND TANK INTAKE, THEN USE 1-JAGUAR SINK MIXER(RATIO) LYRIC LYR-38309PM WITHOUT SPOUT FOR FULL DIRECT INPUT/FULL TANK INPUT.

JAGUAR USE 1-BIBCOCK BEFORE GEYSER-STOP-COCK TO EMPTY-CLEAN TANK

HINDWARE KITCHEN BASIN (SS) STAINLESS STEEL CHROME FINISH PLATINO MODEL NO.: 36X20X8 36INCHx20INCH x8INCH

USE, VINOD INDUCTION MODENA (SS) COOKWARE, SUJATA 900WATT JUICER-CUM-GRINDER

THIS IS LIKE RAIN-WATER SINK, SO THIS GOES TO GROUND-FLOOR FRONT-MAINHOLE.

FAUCET HOT/COLD STOP COCK FROM INSIDE KITCHEN

MOTOR:GROUND-WATER[MANUAL_BORING]-100FEET-DEEP:DIRECT-LINE:FIRST_TASK:INSTALL_CAST_IRON_PRESSURE_HAND_PUMP

GROUND FLOOR PLAN: SUPER BUILT-UP AREA: 300 SQUARE FEET=27.87 SQUARE METER=HOME28

1FEET/1FOOT=3INCH+3INCH+3INCH+1.5INCH+1.5INCH=12INCH Eg. 1FEET6INCH=1.5FEET, 1FEET3IN=1.25FEET

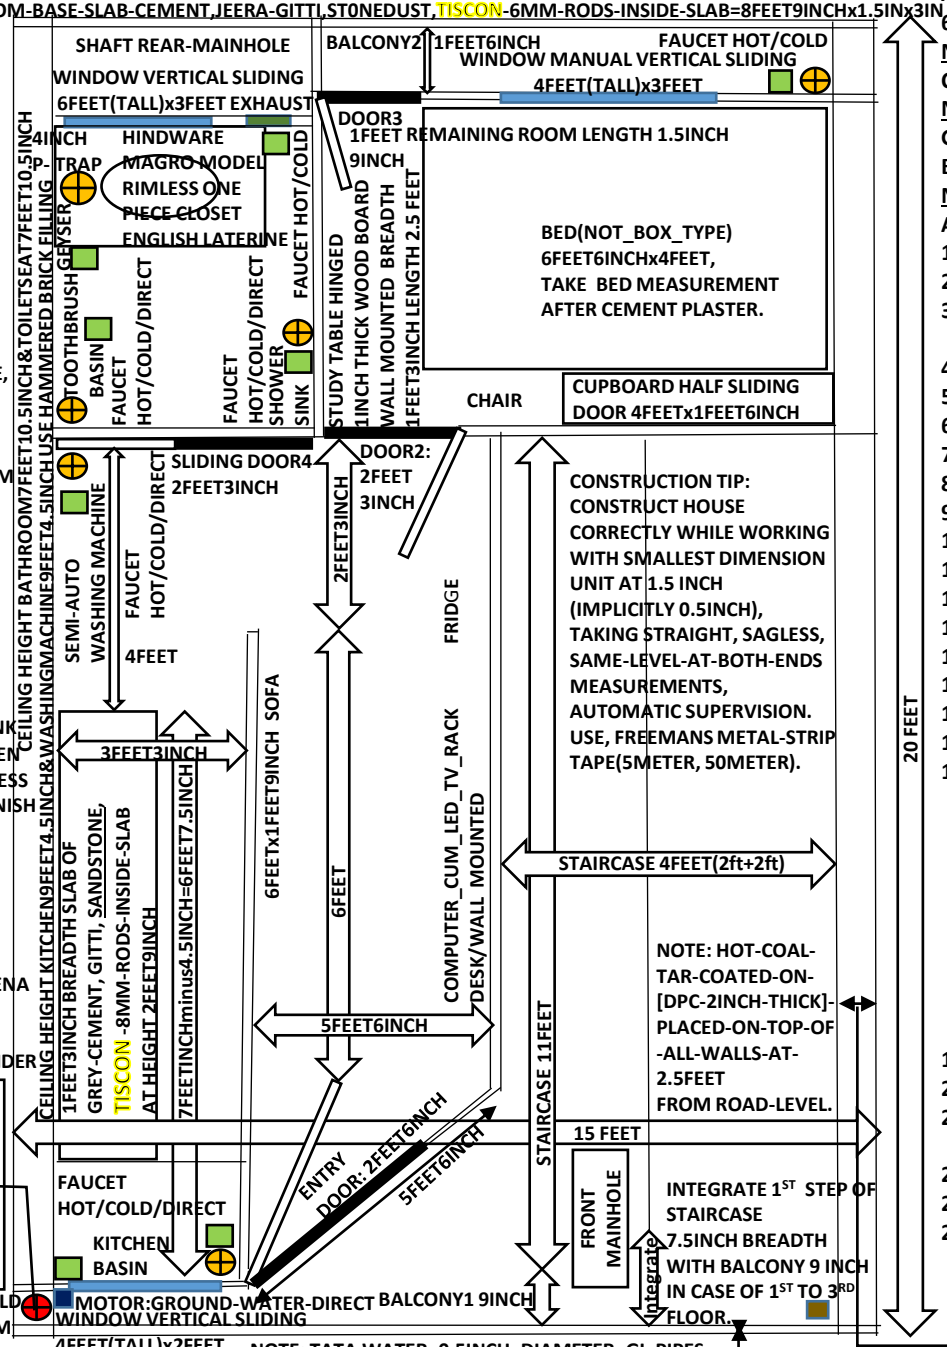

THE_OUTER_2_LENGTH_SIDES_RED_SOLID_BRICK_WALLS_THICKNESS_IS=9INCH

ALL_OTHER_RED_SOLID_BRICK_WALLS_THICKNESS_IS=4.5INCH

6_PILLARS_18INCHx10.5INCH:CEMENT,GITTI,ST0NEDUST,TATASTEEL(IRON_ORE_NonSCRAP)TISCON_ROD. CEILING HEIGHT/FLOOR 10FEET3INCH

NOTE1:ALL BRICK WALLS THICKNESS MEASUREMENTS HAVE BEEN ACCOUNTED FOR BEFORE CONCLUDING THE INSIDE_TO_BETWEEN_WALLS CLEARANCE_DIMENSIONS. TILE_SKIRTING_[CLOSE_TO/AT_SAME_LEVEL_AS]_CEMENT:MEDIUM-GRAINSIZE-FINESAND(1:4 RATIO)WALLPLASTER.

NOTE2:FOR_INDIVIDUAL_PLOT_[[ONLY]]_FROM_1ST_TO_3RD_FLOOR_REAR_BALCONY2_BREADTH_SHOULD_BE_[[REDUCED]]_TO_9_INCH_GIVING_OPEN_TO_SKY_CLEARANCE_OF_9_INCH. REDUCED BECAUSE THERE IS A TOTAL POSSIBILITY THAT YOUR BALCONY2(REAR) WILL GET BLOCKED BY_WALL(REAR)_OF_REAR_ADJACENT_PLOT_OWNER. YOU SHOULD RAISE YOUR REAR END BOUNDARY 4.5 INCH WALL TILL 3RD FLOOR.

NOTE3:TILE SKIRTING THICKNESS IS < WALL PLASTER THICKNESS,TOP GETS PRESSED BY WALLPLASTER.

ALL_INSIDE_TO_BETWEEN_WALLS_CLEARANCE_DIMENSIONS(LENGTHxBREADTH):

1. ENTRY_DOOR: 2FEET6INCH
2. STAIRCASE: 11FEETx4FEET
3. KITCHEN: 6FEET7.5INCHx3FEET3INCH, CONCRETE CEMENT SLAB BREADTH 1FEET3INCH, AT HEIGHT 2FEET9INCH + 1.0INCH_THICKNESS_MARBLE_STONE_ON_TOP, SAME_ HEIGHT_FOR_KITCHEN_BASIN
4. SEMI_AUTO_WASHING_MACHINE: UPTO_3FEETx2FEET (WHIRLPOOL SUPERB ATOM 6.5 KG)
5. BATHROOM-CUM-TOILET:5FEETx4FEET9INCH, EXHAUST_FAN_CROMPTON_GREAVES: TRANSAIR/225MM/1400RPM/BIRD-SCREEN
6. DRAWING_ROOM/HALL: 11FEETx5FEET6INCH
7. SOFA: 6FEETx1FEET9INCH(MAXIMUM)
8. FRIDGE:UPTO 2FEETx2FEET
9. BEDROOM: 8FEET4.5INCHx5FEET6INCH
10. SHAFT-REAR-MAINHOLE: 4FEET9INCHx2FEET (OPEN_TO_SKY_CLEARANCE_IRON_CAGE_AT_TOP)
11. BALCONY1(FRONT): 9INCH BREADTH
12. BALCONY2(REAR): 1FEET6INCH BREADTH (IMPORTANT_FOR_YOUR_LIFE_&_A_MUST_IN_A_HOUSE)
13. CUPBOARD_HALF_SLIDING_DOOR: 4FEETx1FEET6INCH(4FEETx1FEET5INCH, 1INCH_MARGIN_FOR_SLIDING_DOOR)
14. BED(NOT_BOX_TYPE): 6FEET6INCHx4FEET, HEIGHT_OF_BED=12INCH+5INCH_KURLONmattress
15. DOOR2: 2FEET3INCH
16. DOOR3: 1FEET9INCH
17. SLIDING DOOR4: 2FEET3INCH
18. USE SOMANY_TILES, TATASTEEL(IRON_ORE_NonSCRAP_neverRustsInternally)WATER_GI_PIPES, UNIK_GI_FITTINGS(make_sure_spelling_in_products), KISAN (SWR:Soil,Waste,RainWater) uPVC PIPES(FIRST_4INCH_DIAMETER_VERTICAL_PIPELINE_IN_SHAFT_FOR_LATERINE_CLOSET_SINK_&_SECOND_3INCH_DIAMETER_VERTICAL_PIPELINE_IN_SHAFT_FOR_SHOWER_CUM_TOOTBRUSH_BASIN_CUM_WASHING_MACHINE_CUM_SINKS_&_THIRD_3INCH_DIAMETER_VERTICAL_PIPELINE_IN_SHAFT_FOR_KITCHEN_BASIN_SINK_&_FOURTH_3INCH_DIAMETER_VERTICAL_PIPELINE_IN_SHAFT_FOR_BALCONY2_SINK)_&_FITTINGS(ALL(6)_KISAN_NALI_TRAP_3INCH_SIPHON_SINKS)SHOULD_BE_EXACTLY_HORIZONTALLY_LEVELLED_SUPERVISE_YOURSELF_AND_PURCHASE_DOUBLE_THE_AMOUNT_OF_PVC_ADHESIVE_SOLUTION_OF_WHAT_PLUMBER_TELLS_YOU_AND_TELL_PLUMBER_TO_APPLY_DOUBLE_THE_AMOUNT_OF_WHAT_HE_NORMALLY_APPLIES), HINDWARE_MAGRO_RIMLESS_ONE-PIECE_CLOSET_ENGLISH_LATRINE, HINDWARE_KITCHEN_BASIN_STAINLESSSTEEL(SS)_MATT_FINISH, JAGUAR_TOOTHBRUSH_BASIN, JAGUAR_COMPANY_FAUCETS, KIRANSLIDOCRAFT_MANUAL_VERTICAL_SLIDING_WINDOW_MIDDLE_PICTURE. NOTE: KISAN SWR uPVC TYPE-B, HIGH PRESSURE CAPACITY.
19. BALCONY2(REAR)_SECURELY_ENCLOSED_BY_GRID_CAGE_IRON_SQUARE_RODS.CAGE_BORDER_ANGLE_WIDTH=1.5INCH, ROD=0.375INCH
20. STUDY TABLE WALL MOUNTED HINGED BOARD 4-LEG-SKELETAL-MODULAR-PLASTIC-FRAME-SUPPORT-HT.-2FEET3INCH-BREADTH1.25FT.
21. DARK_RED_RIPE_SOLID_BRICK_DIMENSION: 9INCHX4.5INCH(DIFFICULT TO FIND EXACTLY THIS DIMENSION, MAYBE IN VILLAGE_KILNS_OR_FIND_AS_CLOSE_AS_POSSIBLE, BRICK-KILN-OWNERS_HAVE_REDUCED_THE_BRICK-DIE-SIZE).
22. SUPER BULIT-UP AREA(TOTAL_PLOT_SIZE LENGTHxBREADTH): 20FEETx15FEET(FRONT)
23. Use 1. LEGRAND_COMPANY ELECTRICAL SWITCHES, SOCKETS 2. ABB_COMPANY MCB 3. KEI_COMPANY WIRES&CABLES 4. OSRAM CFL 23W
24. KAPSUL-AIR(DEPTH=22INCH) AIRCONDITIONER INSTALLATION AS IT APPEARS IN ADVERTISORY VIDEOS THAT ATLEAST 4 INCH DEPTH IS INSIDE WINDOW, THIS IMPLIES OUTSIDE WINDOW DEPTH OF 22-4=18INCH: (A) ON GROUND FLOOR THERE IS A CLEAR MARGIN OF 18INCH (B) ON 1ST FLOOR TO 3RD FLOOR AS BALCONY2 CLEARANCE IS 9.0-1.5=7.5INCH, SO MAKE A KAPSUL BODY SHAPE 7INCH HEIGHT SLOT IN IRON CAGE AT WINDOW-KAPSUL-INSTALL-HT. IN THE BOUNDARY-RAILING-CUM-CAGE OF BALCONY2. ALSO, KAPSUL-AIR HAS FRESH-AIR-MODE.

NOTE1: JAGUAR 2_ANGULAR_STOP_COCKS TO BE FITTED BEFORE_EVERY_SINK MIXER, EXCEPT AT PLACE OF SHOWER.

NOTE2: JAGUAR FOR SHOWER-MIXER-ETERNAL KUP-35115PM Rupees 7100 (1 No.), SHOWER PIPE (SHA-1211N)

NOTE3: JAGUAR FOR HAND-SHOWER-MIXER-EXTERNAL KUP-35149PM Rupees 6150 (1 No.)

NOTE4: ALL_JAGUAR_ITEMS_IN_CHROME_FINISH

NOTE5: ALSO, JAGUAR ANGULAR_STOP_COCK TO BE FITTED, 1_EACH_BEFORE, DIRECT_PILLAR_COCK & DIRECT_WASHING_MACHINE_BIB_COCK & DIRECT_ KITCHEN_BIB_COCK.

USE, JAGJEET ESTD. 1968 MANUAL VERTICAL CITRUS FRUIT PRESS JUICE MACHINE PLAIN STEEL FINISH, CHECK SIEVE FOR CRACK AND HOLES SYMMETRY.

JAGUAR 1. KUBIX KUS-WHT-35935 TOOTHBRUSH BASIN 565mmX420mmX140mm Rupees 6990, AS IN PRODUCT CATALOGUE

2. HAND SHOWER(LATERINE) ALD-573 Rs. 1350

3. KUBIX PRIME KUP-35021PM PILLAR COCK (DIRECT) for BASIN 190MM EXTENSION BODY Rupees 2650

4. BIB COCK KUP-35037PM (DIRECT/GEYSER) Rupees 1700 NUMBERS= 7

5. KITCHEN LYRIC LYR-38309 SINK MIXER SWINGING SPOUT Rupees 4000 NUMBERS= 8

6. SHOWER OHS-WHM-1763 Rupees 23450

7. HAND SHOWER(BATH) HSH-1721 Rupees 3750

8. ANGULAR STOP COCK KUP-35053PM Rupees1350 NUMBERS= 19

9. BEFORE ALL SINK MIXER OUTPUTS, USE 2-ANGULAR STOP COCK KUP-35053PM FOR DIRECT INTAKE AND GEYSER INTAKE, THEN USE 1- SINK MIXER(RATIO) LYRIC LYR-38309PM WITHOUT SPOUT FOR FULL DIRECT OUTPUT/FULL GEYSER OUTPUT/MIXER(RATIO) OUTPUT AND THEN USE A BIBCOCK.

NOTE: USE 46MM, TATA-PRAVESH STEEL ENTRY DOOR (CORAL)

NOTE: USE, ULTRATECH WEATHER PLUS CEMENT

NOTE: STANDARD_EARTHING: 2inchx2inchx1inch COPPER-SOLID-BLOCK BURIED 10FEET DEEP IN GROUND &CONNECTED USING COPPER SOLID WIRE GAUGE-AWG4/5.18MM_DIAMETER/21.15 MMSQUARE.