
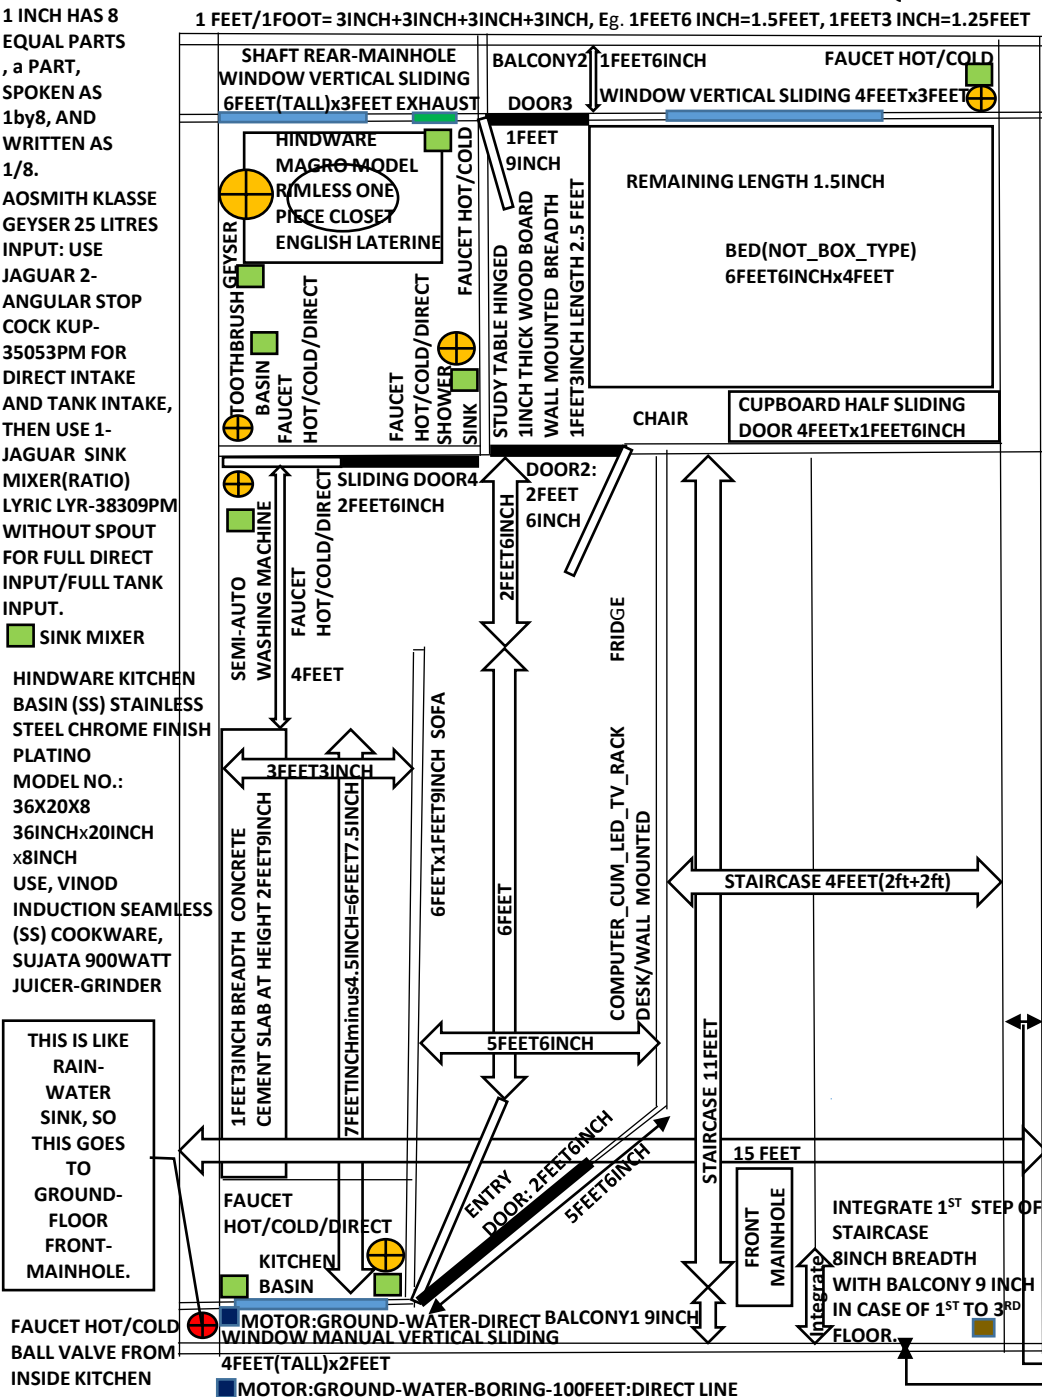


# GROUND FLOOR PLAN: SUPER BUILT-UP AREA: 300 SQUARE FEET

1 INCH HAS 8 EQUAL PARTS, a PART, SPOKEN AS 1by8, AND WRITTEN AS 1/8. AOSMITH KLASSE GEYSER 25 LITRES INPUT: USE JAGUAR 2-ANGULAR STOP COCK KUP-35053PM FOR DIRECT INTAKE AND TANK INTAKE, THEN USE 1-JAGUAR SINK MIXER(RATIO) LYRIC LVR-38309PM WITHOUT SPOUT FOR FULL DIRECT INPUT/FULL TANK INPUT.  SINK MIXER HINDWARE KITCHEN BASIN (SS) STAINLESS STEEL CHROME FINISH PLATINO MODEL NO.: 36X20X8 36INCHx20INCH x8INCH USE, VINOD INDUCTION SEAMLESS (SS) COOKWARE, SUJATA 900WATT JUICER-GRINDER



THE OUTER 2\_LENGTH SIDES RED SOLID BRICK WALLS THICKNESS IS=9INCH ALL\_OTHER RED SOLID BRICK WALLS THICKNESS IS=4.5INCH

6\_PILLARS:CONCRETE\_CEMENT\_TATASTEEL(IRON\_ORE\_NON\_SCRAP)TISCORON RODS WILL BE REQUIRED. CEILING HEIGHT/FLOOR 10FEET3INCH. NOTE1:ALL BRICK WALLS THICKNESS MEASUREMENTS HAVE BEEN ACCOUNTED FOR BEFORE CONCLUDING THE INSIDE TO BETWEEN WALLS CLEARANCE DIMENSIONS. TILE SKIRTING TO BE AT SAME LEVEL AS CEMENTsand(1:4RATIO)WALLPLASTER. NOTE2:FOR INDIVIDUAL PLOT [[ONLY]] FROM 1<sup>ST</sup> TO 3<sup>RD</sup> FLOOR REAR BALCONY2 BREADTH SHOULD BE [[REDUCED]] TO 9\_INCH GIVIN G\_OPEN\_TO\_SKY\_CLEARANCE\_OF\_9\_INCH. REDUCED BECAUSE THERE IS A TOTAL POSSIBILITY THAT YOUR BALCONY2(REAR)\_WILL\_GET\_BLOCKED\_BY\_WALL(REAR)\_OF\_REAR\_ADJACENT\_PLOT\_OWNER.

ALL\_INSIDE\_TO\_BETWEEN\_WALLS\_CLEARANCE\_DIMENSIONS(LENGTHxBREADTH):

- ENTRY\_DOOR: 2FEET6INCH
- STAIRCASE: 11FEETx4FEET
- KITCHEN: 6FEET7.5INCHx3FEET3INCH, CONCRETE CEMENT SLAB BREADTH 1FEET3INCH, AT HEIGHT 2FEET9INCH + 1.0INCH THICKNESS MARBLE STONE ON TOP, SAME HEIGHT FOR KITCHEN BASIN
- SEMI\_AUTO\_WASHING\_MACHINE: UPTO\_3FEETx2FEET (WHIRLPOOL 6.5 KG)
- BATHROOM-CUM-TOILET:5FEET6INCHx4FEET9INCH, EXHAUST\_FAN\_CROMPTON\_GREAVES: TRANSAIR/225MM/1400RPM/BIRD-SCREEN
- DRAWING\_ROOM/HALL: 11FEETx5FEET6INCH
- SOFA: 6FEETx1FEET9INCH(MAXIMUM)
- FRIDGE:UPTO 2FEETx2FEET
- BEDROOM: 8FEET4.5INCHx5FEET6INCH
- SHAFT-REAR-MAINHOLE: 5FEETx1FEET6INCH (OPEN\_TO\_SKY\_CLEARANCE)
- BALCONY1(FRONT): 9INCH BREADTH
- BALCONY2(REAR): 1FEET6INCH BREADTH (IMPORTANT\_FOR\_YOUR\_LIFE\_&\_A\_MUST\_IN\_A\_HOUSE)
- CUPBOARD\_HALF\_SLIDING\_DOOR: 4FEETx1FEET6INCH(4FEETx1FEET5INCH, 1INCH\_MARGIN\_FOR\_SLIDING\_DOOR)
- BED(NOT\_BOX\_TYPE): 6FEET6INCHx4FEET, HEIGHT\_OF\_BED=12INCH+5INCH\_KURLONmattress
- DOOR2: 2FEET6INCH
- DOOR3: 1FEET10.5INCH
- SLIDING DOOR4: 2FEET6INCH
- USE SOMANY\_TILES, TATASTEEL(IRON\_ORE\_NonSCRAP\_neverRustsInternally)WATER\_GI\_PIPES, UNIK\_GI\_FITTINGS(make\_sure\_spelling\_in\_products), KISAN PVC PIPES(FIRST\_BIG\_DIAMETER\_VERTICAL\_PIPELINE\_IN\_SHAFT\_FOR\_LATERINE\_CLOSET\_SINK\_&\_SECOND\_SMALL\_DIAMETER\_VERTICAL\_PIPELINE\_IN\_SHAFT\_FOR\_SHOWER\_CUM\_TOOTBRUSH\_BASIN\_CUM\_WASHING\_MACHINE\_CUM\_SINKS\_&\_THIRD\_SMALL\_SAME\_DIAMETER\_VERTICAL\_PIPELINE\_IN\_SHAFT\_FOR\_KITCHEN\_BASIN\_SINK\_&\_FOURTH\_SMALL\_SAME\_DIAMETER\_VERTICAL\_PIPELINE\_IN\_SHAFT\_FOR\_BALCONY2\_SINK) & FITTINGS(KISAN\_NALI\_TRAP\_SIPHON\_SINK)SHOULD\_BE\_EXACTLY\_HORIZONTALLY\_LEVELLED\_SUPERVISE\_YOURSELF\_AND\_PURCHASE\_DOUBLE\_THE\_AMOUNT\_OF\_PVC\_ADHESIVE\_SOLUTION\_OF\_WHAT\_PLUMBER\_TELLS\_YOU\_AND\_TELL\_PLUMBER\_TO\_APPLY\_DOUBLE\_THE\_AMOUNT\_OF\_WHAT\_HE\_NORMALLY\_APPLIES), HINDWARE AMAZON RIMLESS SINGLE-PIECE CLOSET, HINDWARE KITCHEN STAINLESSSTEEL(SS)\_MATT\_FINISH BASIN, HINDWARE TOOTHBRUSH\_BASIN, JAGUAR\_COMPANY\_FAUCETS, KIRANSLIDOCRAFT MANUAL\_VERTICAL\_SLIDING\_WINDOW\_MIDDLE\_PICTURE.
- BALCONY2(REAR)\_SECURELY\_ENCLOSED\_USING\_GRID\_CAGE\_IRON\_SQUARE\_RODS.
- STUDY TABLE WALL MOUNTED HINGED BOARD 4-LEG-SKELETAL-MODULAR-PLASTIC-FRAME-SUPPORT-HT.-2FEET3INCH-BREADTH1.25FT.
- RED\_SOLID\_BRICK\_DIMENSION: 9INCHx4.5INCH(DIFFICULT TO FIND EXACTLY THIS DIMENSION, MAYBE IN VILLAGE\_KILNS\_OR\_FIND\_AS\_CLOSE\_AS\_POSSIBLE, BRICK-KILN-OWNERS\_HAVE\_REDUCED\_THE\_BRICK-DIE-SIZE).
- SUPER BUILT-UP AREA(TOTAL\_PLOT\_SIZE LENGTHxBREADTH): 20FEETx15FEET(FRONT)
- Use 1. LEGRAND\_COMPANY ELECTRICAL SWITCHES, SOCKETS 2. ABB\_COMPANY MCB 3. KEI\_COMPANY WIRES&CABLES 4. OSRAM CFL 23W
- KAPSUL-AIR(DEPTH=22INCH) AIRCONDITIONER INSTALLATION AS IT APPEARS IN ADVERTISORY VIDEOS THAT ATLEAST 4 INCH DEPTH IS INSIDE WINDOW, THIS IMPLIES OUTSIDE WINDOW DEPTH OF 22-4=18INCH: (A) ON GROUND FLOOR THERE IS A CLEAR MARGIN OF 18INCH (B) ON 1<sup>ST</sup> FLOOR TO 3<sup>RD</sup> FLOOR AS BALCONY CLEARANCE IS 9INCH ONLY, SO MAKE A KAPSUL BODY SHAPE 7INCH HEIGHT SLOT IN IRON CAGE OVER THE BOUNDARY RAILING (ON 4.5INCH BASE WALL) OF BALCONY2. ALSO, KAPSUL-AIR HAS FRESH-AIR-MODE.

NOTE: STANDARD\_EARTHING: 2inchx2inchx1inch COPPER-SOLID-BLOCK BURIED 10FEET DEEP IN GROUND & CONNECTED USING COPPER SOLID WIRE GAUGE-AWG4/5.18MM\_DIAMETER/21.15 MMSQUARE.