

GROUND FLOOR PLAN: SUPER BUILT-UP AREA: 300 SQUARE FEET

1 FEET/1FOOT= 3INCH+3INCH+3INCH+3INCH, Eg. 1FEET6 INCH=1.5FEET, 1FEET3 INCH=1.25FEET

1 INCH HAS 8
EQUAL PARTS
, a PART,
SPOKEN AS
1by8, AND
WRITTEN AS
1/8.

AOSMITH KLASSE
GEYSER 25 LITRES
INPUT: USE
JAGUAR 2-
ANGULAR STOP
COCK KUP-
35053PM FOR
DIRECT INTAKE
AND TANK INTAKE,
THEN USE 1-
JAGUAR SINK
MIXER(RATIO)
LYRIC LVR-38309PM
WITHOUT SPOUT
FOR FULL DIRECT
INPUT/FULL TANK
INPUT.


■ SINK MIXER

HINDWARE KITCHEN
BASIN (SS) STAINLESS
STEEL CHROME FINISH
PLATINO
MODEL NO.:
36X20X8
36INCHx20INCH
x8INCH
USE, VINOD
INDUCTION MODENA
(SS) COOKWARE,
SUJATA 900WATT
JUICER-CUM-GRINDER

THIS IS LIKE
RAIN-
WATER
SINK, SO
THIS GOES
TO
GROUND-
FLOOR
FRONT-
MAINHOLE.

FAUCET HOT/COLD
STOP COCK FROM
INSIDE KITCHEN

■ MOTOR:GROUND-WATER-DIRECT BALCONY1 9INCH
■ MOTOR:GROUND-WATER-[MANUAL BORING]-100FEET-DEEP:DIRECT LINE(FIRST_TASK: INSTALL_CAST_IRON_PRESSURE_HAND_PUMP)

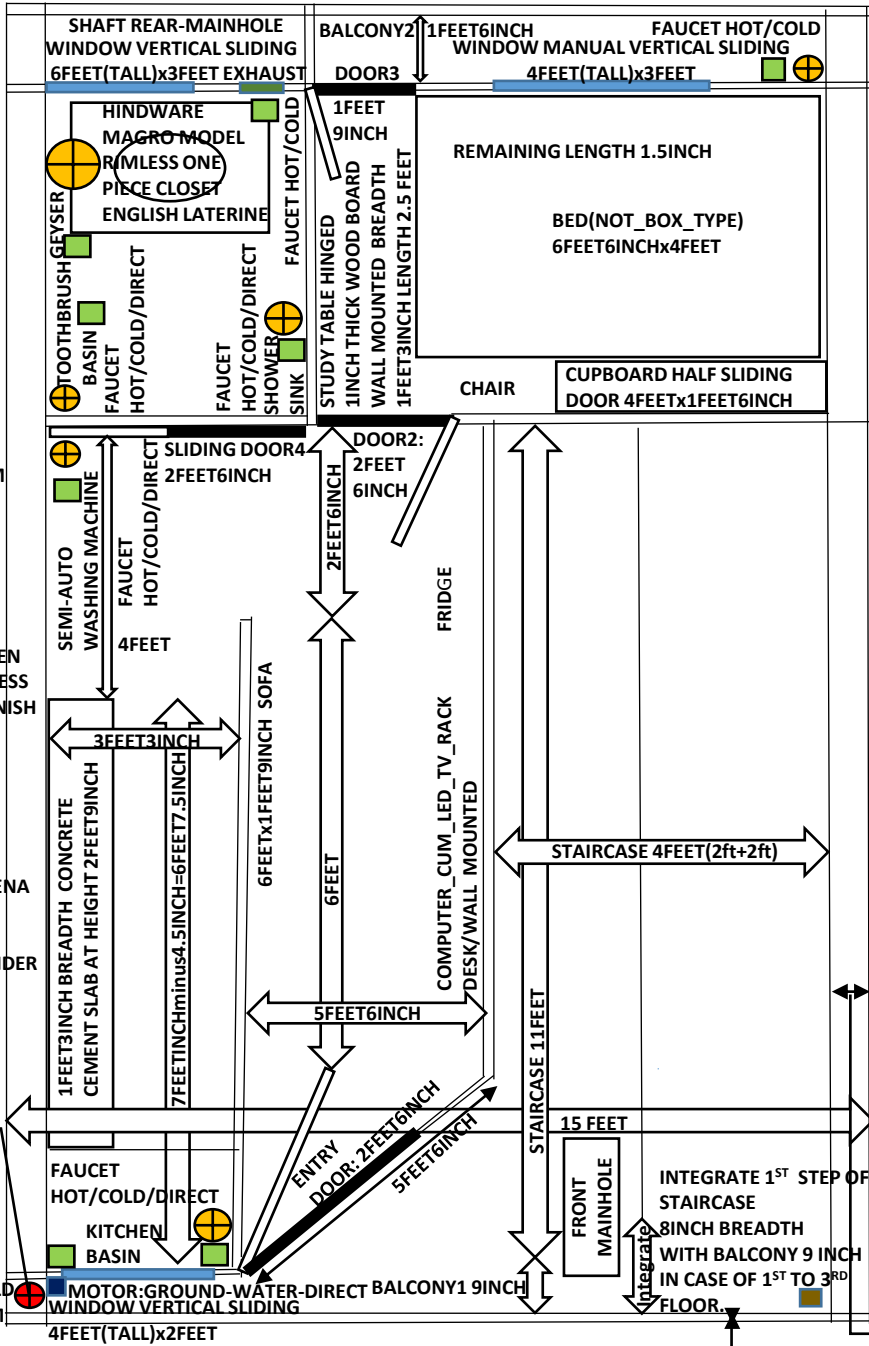

THE OUTER 2_LENGTH_SIDES_RED_SOLID_BRICK_WALLS_THICKNESS_IS=9INCH

ALL_OTHER_RED_SOLID_BRICK_WALLS_THICKNESS_IS=4.5INCH

6_PILLARS:CONCRETE_CEMENT_TATASTEEL(IRON_ORE_NON_SCRAP)TISCORODS_WILL_BE_REQUIRED. CEILING HEIGHT/FLOOR 10FEET3INCH.

NOTE1:ALL BRICK WALLS THICKNESS MEASUREMENTS HAVE BEEN ACCOUNTED FOR BEFORE CONCLUDING THE
INSIDE_TO_BETWEEN_WALLS_CLEARANCE_DIMENSIONS. TILE_SKIRTING_TO_BE_AT_SAME_LEVEL_AS_CEMENTsand(1:4RATIO)WALLPLASTER.
NOTE2:FOR INDIVIDUAL_PLOT_[[ONLY]]_FROM_1ST_TO_3RD_FLOOR_REAR_BALCONY2_BREADTH_SHOULD_BE_[[REDUCED]]_TO_9_INCH_GIVIN
G_OPEN_TO_SKY_CLEARANCE_OF_9_INCH.

REDUCED_BECAUSE_THERE_IS_A_TOTAL_POSSIBILITY_THAT_YOUR_BALCONY2(REAR)_WILL_GET_BLOCKED_BY_WALL(REAR)_OF_REAR_ADJACE
NT_PLOT_OWNER.

ALL_INSIDE_TO_BETWEEN_WALLS_CLEARANCE_DIMENSIONS(LENGTHxBREADTH):

- ENTRY_DOOR: 2FEET6INCH
- STAIRCASE: 11FEETx4FEET
- KITCHEN: 6FEET7.5INCHx3FEET3INCH, CONCRETE CEMENT SLAB BREADTH 1FEET3INCH, AT HEIGHT 2FEET9INCH +
1.0INCH_THICKNESS_MARBLE_STONE_ON_TOP, SAME_HEIGHT_FOR_KITCHEN_BASIN
- SEMI_AUTO_WASHING_MACHINE: UPTO_3FEETx2FEET (WHIRLPOOL 6.5 KG)
- BATHROOM-CUM-TOILET:5FEET6INCHx4FEET9INCH, EXHAUST_FAN_CROMPTON_GREAVES: TRANSAIR/225MM/1400RPM/BIRD-SCREEN
- DRAWING_ROOM/HALL: 11FEETx5FEET6INCH
- SOFA: 6FEETx1FEET9INCH(MAXIMUM)
- FRIDGE:UPTO 2FEETx2FEET
- BEDROOM: 8FEET4.5INCHx5FEET6INCH
- SHAFT-REAR-MAINHOLE: 5FEETx1FEET6INCH (OPEN_TO_SKY_CLEARANCE)
- BALCONY1(FRONT): 9INCH BREADTH
- BALCONY2(REAR): 1FEET6INCH BREADTH (IMPORTANT_FOR_YOUR_LIFE_&_A_MUST_IN_A_HOUSE)
- CUPBOARD_HALF_SLIDING_DOOR: 4FEETx1FEET6INCH(4FEETx1FEET5INCH, 1INCH_MARGIN_FOR_SLIDING_DOOR)
- BED(NOT_BOX_TYPE): 6FEET6INCHx4FEET, HEIGHT_OF_BED=12INCH+5INCH_KURLONmattress
- DOOR2: 2FEET6INCH
- DOOR3: 1FEET10.5INCH
- SLIDING DOOR4: 2FEET6INCH

NOTE1: 2_ANGULAR_STOP_COCKS TO BE FITTED BEFORE_EVERY_SINK
MIXER, EXCEPT AT PLACE OF SHOWER.

NOTE2: FOR SHOWER-MIXER-ETERNAL KUP-35115PM
Rupees 7100 (1 No.), SHOWER PIPE (SHA-1211N)

NOTE3: FOR HAND-SHOWER-MIXER-EXTERNAL KUP-
35149PM Rupees 6150 (1 No.)

NOTE4: ALL_JAGUAR_ITEMS_IN_CHROME_FINISH

NOTE5: ALSO, ANGULAR_STOP_COCK TO BE FITTED, 1_EACH_BEFORE,
DIRECT_PILLAR_COCK & DIRECT_WASHING_MACHINE_BIB_COCK &
DIRECT_KITCHEN_BIB_COCK.

USE SOMANY_TILES, TATASTEEL(IRON_ORE_NonSCRAP_neverRustsInternally)WATER_GI_PIPES,
UNIK_GI_FITTINGS(make_sure_spelling_in_products), KISAN PVC
PIPES(FIRST_BIG_DIAMETER_VERTICAL_PIPELINE_IN_SHAFT_FOR_LATERINE_CLOSET_SINK_&_SECOND_SMALL_DIAMETER_VERTICAL_PIPEL
INE_IN_SHAFT_FOR_SHOWER_CUM_TOOTBRUSH_BASIN_CUM_WASHING_MACHINE_CUM_SINKS_&_THIRD_SMALL_SAME_DIAMETER_VE
RTICAL_PIPELINE_IN_SHAFT_FOR_KITCHEN_BASIN_SINK_&_FOURTH_SMALL_SAME_DIAMETER_VERTICAL_PIPELINE_IN_SHAFT_FOR_BALC
ONY2_SINK) & FITTINGS(KISAN_NALI_TRAP_SIPHON_SINK)SHOULD_BE_EXACTLY_HORIZONTALLY_LEVELLED_SUPERVISE_YOURSELF_AND_
PURCHASE_DOUBLE_THE_AMOUNT_OF_PVC_ADHESIVE_SOLUTION_OF_WHAT_PLUMBER_TELLS_YOU_AND_TELL_PLUMBER_TO_APPLY_D
OUBLE_THE_AMOUNT_OF_WHAT_HE_NORMALLY_APPLIES), HINDWARE AMAZON RIMLESS SINGLE-PIECE CLOSET, HINDWARE KITCHEN
STAINLESSSTEEL(SS)_MATT_FINISH BASIN, HINDWARE TOOTHBRUSH_BASIN, JAGUAR_COMPANY_FAUCETS,
KIRANSLIDOCRAFT_MANUAL_VERTICAL_SLIDING_WINDOW_MIDDLE_PICTURE.

- BALCONY2(REAR)_SECURELY_ENCLOSED_USING_GRID_CAGE_IRON_SQUARE_RODS.
- STUDY TABLE WALL MOUNTED HINGED BOARD 4-LEG-SKELETAL-MODULAR-PLASTIC-FRAME-SUPPORT-HT.-2FEET3INCH-BREADTH1.25FT.
- RED_SOLID_BRICK_DIMENSION: 9INCHx4.5INCH(DIFFICULT TO FIND EXACTLY THIS DIMENSION, MAYBE IN
VILLAGE_KILNS_OR_FIND_AS_CLOSE_AS_POSSIBLE, BRICK-KILN-OWNERS_HAVE_REDUCED_THE_BRICK-DIE-SIZE).
- SUPER BUILT-UP AREA(TOTAL_PLOT_SIZE LENGTHxBREADTH): 20FEETx15FEET(FRONT)
- Use 1. LEGRAND_COMPANY ELECTRICAL SWITCHES, SOCKETS 2. ABB_COMPANY MCB 3. KEI_COMPANY WIRES&CABLES 4. OSRAM CFL 23W
- KAPSUL-AIR(DEPTH=22INCH) AIRCONDITIONER INSTALLATION AS IT APPEARS IN ADVERTISORY VIDEOS THAT ATLEAST 4 INCH DEPTH IS
INSIDE WINDOW, THIS IMPLIES OUTSIDE WINDOW DEPTH OF 22-4=18INCH: (A) ON GROUND FLOOR THERE IS A CLEAR MARGIN OF 18INCH
(B) ON 1ST FLOOR TO 3RD FLOOR AS BALCONY CLEARANCE IS 9INCH ONLY, SO MAKE A KAPSUL BODY SHAPE 7INCH HEIGHT SLOT IN IRON
CAGE OVER THE BOUNDARY RAILING (ON 4.5INCH BASE WALL) OF BALCONY2. ALSO, KAPSUL-AIR HAS FRESH-AIR-MODE.

9INCH_RED_SOLID_BRICK_WALL
4.5INCH_RED_SOLID_BRICK_WALL

NOTE: STANDARD_EARTHING: 2inchx2inchx1inch COPPER-SOLID-BLOCK BURIED 10FEET DEEP IN GROUND
&CONNECTED USING COPPER SOLID WIRE GAUGE-AWG4/5.18MM_DIAMETER/21.15 MMSQUARE.