


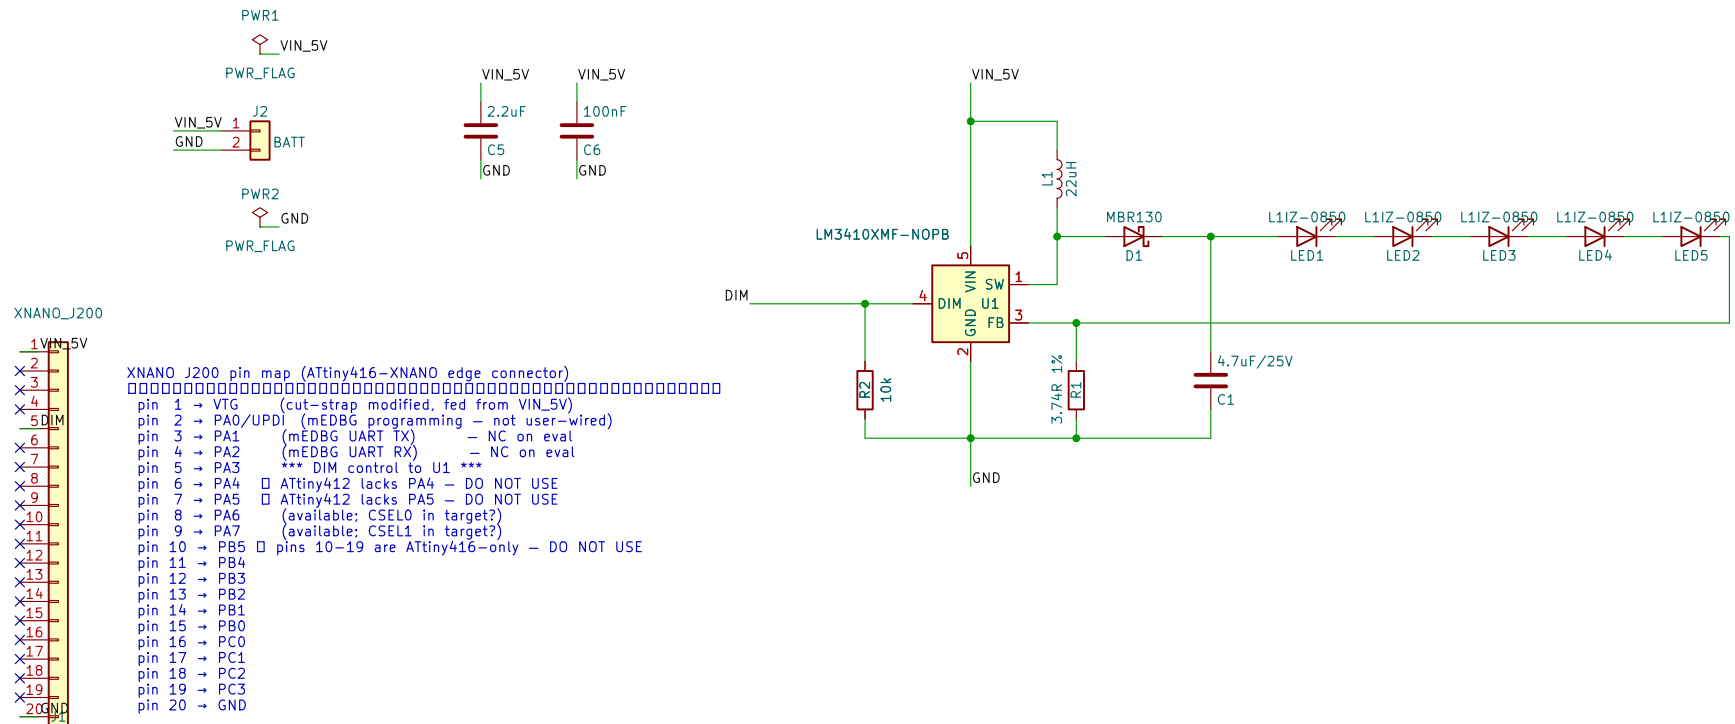

FIRMWARE PORTABILITY: only PA0/1/2/3/6/7 are common to ATtiny412 and ATtiny416 - restricting to these pins lets the SAME firmware build target both chips (toolchain: PlatformIO + megaTinyCore).

□ XNANO MODIFICATION REQUIRED:

Cut R100 (0Ω strap inside XNANO) to isolate VTG from USB-5V.
 After cut, J1.1 (VTG) is fed by VIN_5V from external bench supply (5V/3A, wired to VIN_5V label).
 mEDBG stays on USB-5V (separate domain) - debug works during firmware-ADC low-V cutoff test (R11).

Sheet: /
 File: beacon-eval.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 10.0.3

Rev:

Id: 1/1