

# Localization of an UAV for Crack Detection in Railway Tracks

Gabriel D. Silva

*gd.silva@unesp.br*



UNIVERSIDADE ESTADUAL PAULISTA

"JÚLIO DE MESQUITA FILHO"

Câmpus de Ilha Solteira

October 10, 2022

**① Introduction**

**② MCL Algorithm**

**③ 2D Localization of UAV**

**④ Simulation Results**

**⑤ Conclusion and Future Work**

**1 Introduction**

2 MCL Algorithm

3 2D Localization of UAV

4 Simulation Results

5 Conclusion and Future Work

# Introduction

- UAV applications: sports, partys, get in places where human intervation might be difficult.
- E.g.: detecting cracks in a railway track using concepts of image processing.

# Introduction

- Study's based in India.
- There's a vast railway network.
- It's been increasing in a rapid pace, however its infrastructure's not been able to follow it.
- It causes severe loss of valuable human life and property.

# Introduction

Techniques used for damage detection:

- graphical inspection;
- non-destructive testing technologies (acoustic emission, ultra-sonic techniques, etc); and
- shuddering based global methods.

# Introduction

Techniques used for damage detection:

- graphical inspection;
- non-destructive testing technologies (acoustic emission, ultra-sonic techniques, etc); and
- shuddering based global methods.

# Introduction

Techniques used for damage detection:

- graphical inspection;
- non-destructive testing technologies (acoustic emission, ultra-sonic techniques, etc); and
- shuddering based global methods.

## Two-fold objective

- Reduce risk of rail accidents; and
- reduce manned labor required to identify cracks along railway tracks.



① Introduction

② MCL Algorithm

③ 2D Localization of UAV

④ Simulation Results

⑤ Conclusion and Future Work

# MCL Algorithm


GOAL: localizing the position of the UAV.

## How does it work?

- Estimates its position and orientation;
- first interaction: uniform distribution;
- the later ones gets more precise.

# MCL Algorithm (State Representation)

- three element vector;
- initial input;
- mean of the highest weighed cluster of particles.



# MCL Algorithm (Initialization of Particles)

## Global Localization

- initial position is unknown;
- particles uniformly distributed;
- less performance.

## Initial pose

- initial location is given;
- more particles accumulated at the initial pose;
- more performance.

# MCL Algorithm (Resampling Particles)

- *UpdateThreshold*: minimum amount of necessary change in the three element vector.
- *ResamplingInterval*: defines the number of necessary updates for particle resampling.

① Introduction

② MCL Algorithm



③ 2D Localization of UAV

④ Simulation Results

⑤ Conclusion and Future Work



# 2D Localization of UAV

MATLAB usage:

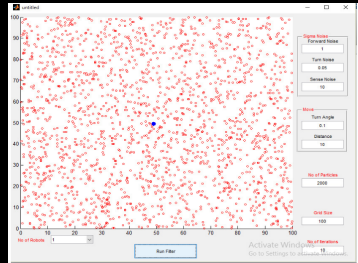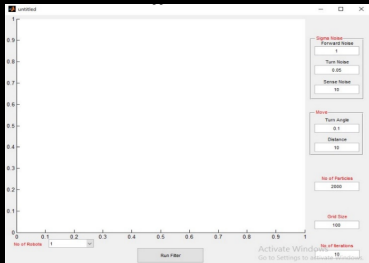

# 2D Localization of UAV

MATLAB usage:

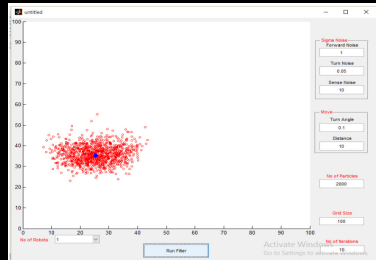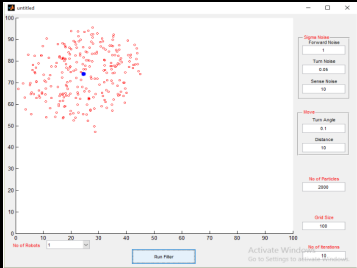



1 Introduction

2 MCL Algorithm

3 2D Localization of UAV

4 Simulation Results

5 Conclusion and Future Work

# Simulation Results

## UAV Characteristics



- 8 MP Digital camera;
- average speed: 33 mph;
- 20 frames/sec;<sup>1</sup>
- UAV must be equipped with flash lights;

---

<sup>1</sup>1200 frames per minute

# Simulation Results

- *improfile*: find the intensity profile of an image along a line segment.<sup>2</sup>

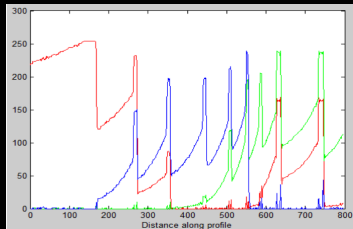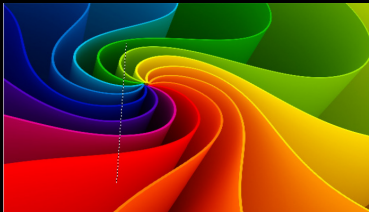


---



<sup>2</sup>Works with grayscale and RGB.

# Simulation Results



For crack detection in a railway track:

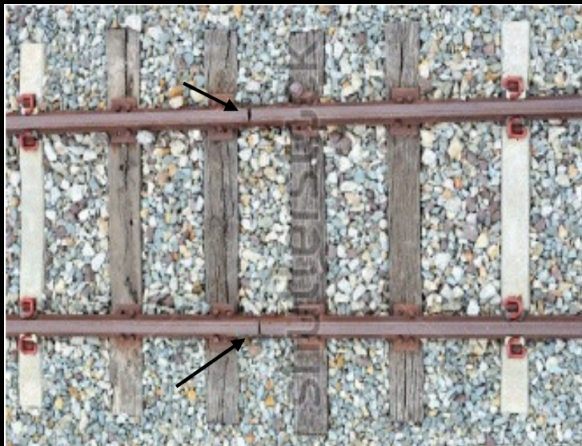

# Simulation Results

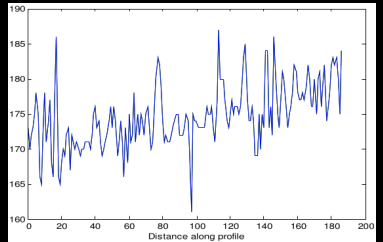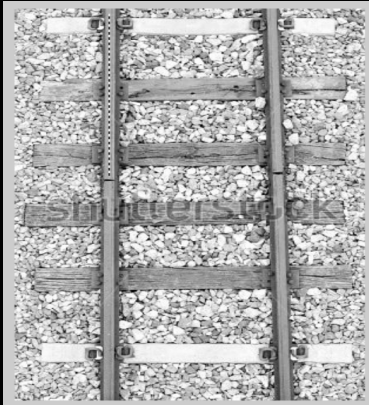

# Simulation Results

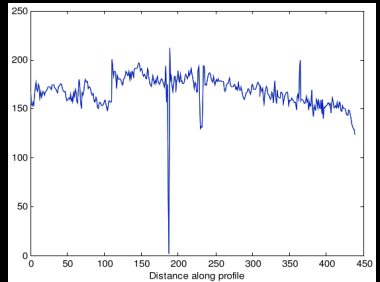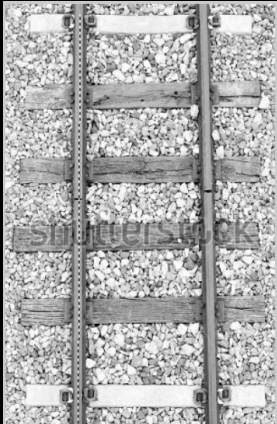

① Introduction

② MCL Algorithm

③ 2D Localization of UAV

④ Simulation Results

⑤ Conclusion and Future Work

# Conclusion and Future Work

- Simple solution to detect cracks along railway lines using localization and image processing.
- Possible effects that the UAV is subjected to by the presence of electric wires above the tracks.
- Smartphone application can also be developed for monitoring the motion and position of the UAV.