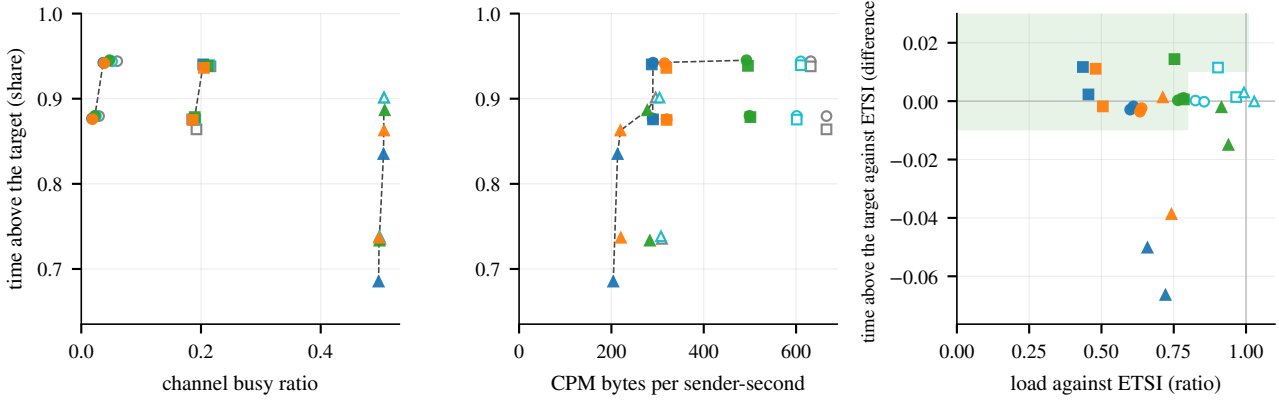
time above the target (share)
1.0
0.9
0.8
0.7
0.0
0.2
0.4
channel busy ratio
CPM bytes per sender-second
0
200
400
600
time above the target against ETSI (difference)
0.02
0.00
−0.02
−0.04
−0.06
0.00
0.25
0.50
0.75
1.00
load against ETSI (ratio)
ETSI (Artery)
ETSI, absolute positions
AoC, n = 1
AoC, n = 2
AoC + deviation
0 load stations
12 load stations
36 load stations