ME301YP
30-INCH SINGLE BUILT-IN OVEN
MASTERPIECE® COLLECTION WITH PROFESSIONAL HANDLE



Home Connect

FEATURES & BENEFITS

- WiFi smart appliance capabilities include personalized control and notifications via Home Connect® app
- Features 11 heating modes with 1 Full Access® telescopic rack
- Convection multi-rack mode gives uniform baking results even when using all 3 racks simultaneously
- SoftClose® hinges prevent slamming and ensure ultra-smooth closing
- Self-clean mode cleans interior walls and rack supports in as little as 2 hours
- A specially crafted full surface gray glass combines with a stainless steel handle for a luxurious look and finish



GENERAL PROPERTIES	
Heating Modes	
(11) Bake, Variable Broil (hi & low), Roast, Warm, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Pizza, True Convection, Fast Preheat	
Sabbath	Yes
Cleaning Type	Self Clean
Telescopic Rack(s)	1
Standard Racks	2
Interior Lights	2 Halogen
Home Connect® (Wi-Fi Enabled)	Yes
OVEN PERFORMANCE	
Bake Element	2,400 W (4 Passes)
Broil Element	3,800 W (12 Passes)
Convection Element	2,000 W
TECHNICAL DETAILS	
Watts (240 / 208 V)	6,400 / 4,388 W
Circuit Breaker	30 Amp
Volts	240 / 208 V
Frequency	60 Hz
Plug Type	Fixed Connection, No Plug
Conduit	60" 4-Wire
Energy Source	Electric
DIMENSIONS & WEIGHT	
Overall Appliance Dimensions (HxWxD)	29" x 29 3/4" x 24 1/2"
Trim Overlaps (Top – Sides – Bottom)	3/8" to 2" – 9/16" – 0"
Required Cutout Size (HxWxD) – Standard	27"–28 5/8" x 28 1/2" x 23 1/2"
Required Cutout Size (HxWxD) – Flush	29 1/8" x 30" x 24 1/2"
Oven Cavity Size	4.6 cu. ft.
Overall Oven Interior Dimensions (HxWxD)	17 13/16" x 24 1/8" x 17 13/16"
Usable Oven Interior Dimensions (HxWxD)	12 5/16" x 23 1/4" x 15 1/4"
Net Weight	166 lbs
ACCESSORIES (INCLUDED)	
1 Telescopic and 2 Standard Oven Racks	
WARRANTY	
Limited Warranty Parts and Labor	2 Year


†To be fully ADA compliant, these units must be installed according to ADA guidelines. Please check current ADA requirements for guidance on installation.

ME301YP
30-INCH SINGLE BUILT-IN OVEN
MASTERPIECE® COLLECTION WITH PROFESSIONAL HANDLE

Thermador


INSTALLATION DETAILS

Single Oven Bottom Hinge

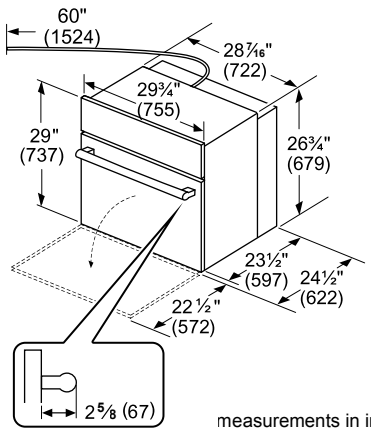

measurements in inches (mm)

Single Oven Wall Mount Installation

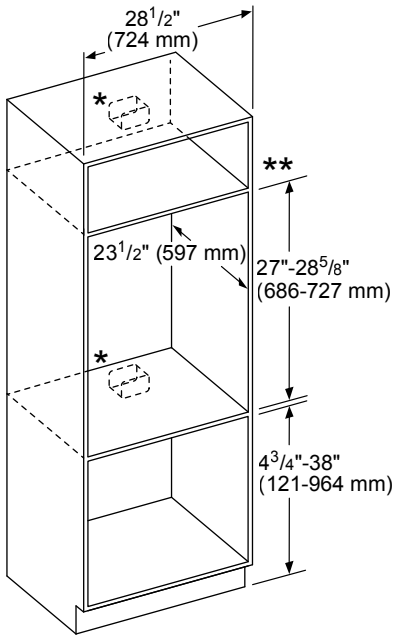


* For single ovens installed into a wall cabinet, the junction box may be located above, beneath, left or right of the unit within reach of the power cord.

** For oven installation in a wall cabinet, the control panel overlap is a min. 3/8" (10 mm) to max. 2" (51 mm).

measurements in inches (mm)

Dimensions for Under-Counter Installation

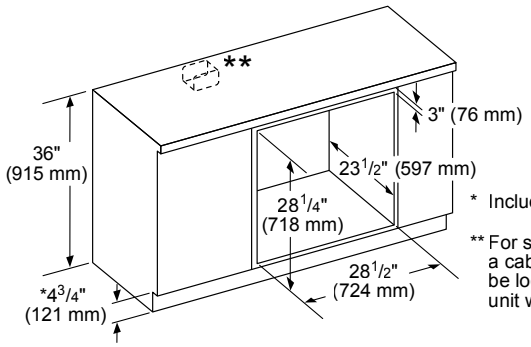


* Includes 3/4" (19 mm) base plate.


** For single ovens installed under a cabinet, the junction box should be located to the right or left of the unit within reach of the power cord.

measurements in inches (mm)

Flush Install Top View

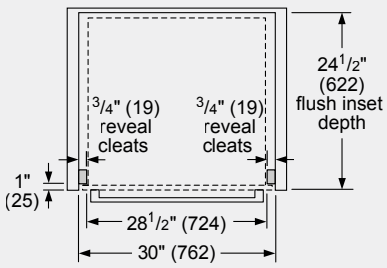

Side View

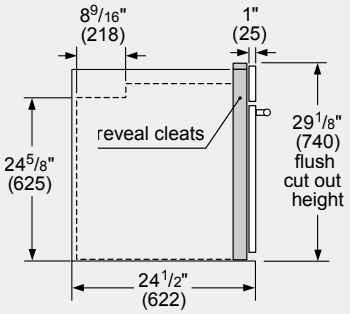


measurements in inches (mm)

PFAS

ME301YP
30-INCH SINGLE BUILT-IN OVEN
MASTERPIECE® COLLECTION WITH PROFESSIONAL HANDLE

INSTALLATION DETAILS

Standard installation
Single oven, double oven or combo oven over warming or storage drawer

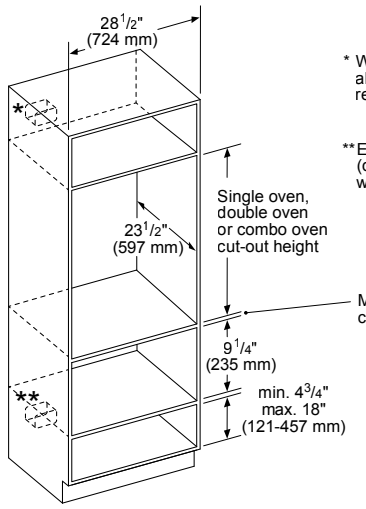


* Wall oven junction box may be located above or to the right or left of the unit within reach of the power cable.

** Electrical hook-up may be located below (depending on space) or next to the drawer within reach of the power cable.

Minimum 3/4" (18 mm) required between cut-outs.

measurements in inches (mm)

Flush installation
Single oven over storage or warming drawer



Single Wall Oven

* IMPORTANT: Base has to be able to support the weight of the oven. Please check oven manual for minimum weight requirements.


minimum 1/2" (13 mm) required between cut-outs*

Warming Drawer

** For WD30W, the installed dimension may differ. This drawing based on a 3/4" (19 mm) thick custom panel.

measurements in inches (mm)

Standard installation
30" speed oven or microwave above a single oven***

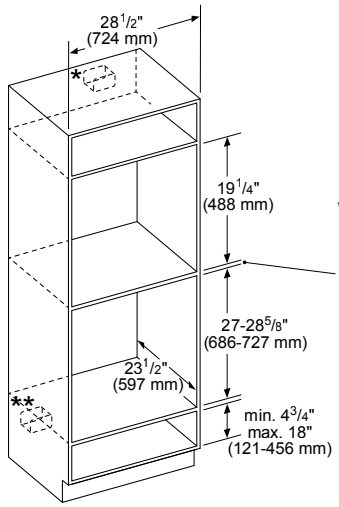

* Junction box may be located above or next to the unit within the reach of the power cable.


** Junction box may be located below (depending on space) or next to the unit within the reach of the power cable.

*** Most combinations available as combo oven (one cut-out, one electrical hook-up).

Minimum dimension between cut-out:
- 1" (25 mm) for wall oven cut-out height of 28 5/8" (727 mm)
- 2 5/8" (67 mm) for wall oven cut-out height of 27" (686 mm)

Measurements in inches (mm)

Flush installation
Speed oven or microwave above a 30" single oven**

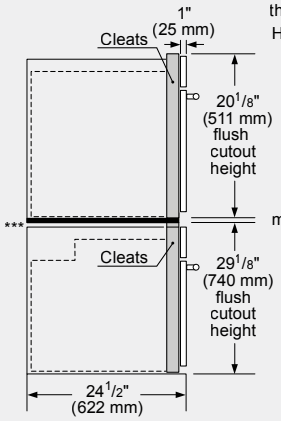

*** Flush installation requires a base plate underneath the body: 30" products–Dimensions: H 5/16" (8 mm) x W 28 1/2" (724 mm) x D 22 1/2" (571 mm)

minimum 1/2" (13 mm) required between cut-outs*

* IMPORTANT: Base has to be able to support the weight of the oven. Please check oven manual for minimum weight requirements.

** Most combinations available as combo oven (one cut-out, one electrical hook-up).

measurements in inches (mm)

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2026 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.