


8	SAY WHAT YOU DO
<u>OPERATING CONDITIONS</u>	
NORMAL -----	11,714 HP [8,735 kW] @ 9,340 RPM
NORMAL TORQUE -----	79,044 IN-LB [8,930 N-m]
MAX POWER -----	14,057 HP [10,482 kW] @ 9,807 RPM
MAX POWER TORQUE -----	90,338 IN-LB [10,206 N-m]
TRIP SPEED -----	10,788 RPM
SELECTION TORQUE-----	118,566 IN-LB [13,396 N-m]
(INCLUDES 1.50 S.F. ON NORMAL TORQUE)	
<u>COUPLING RATING</u>	
MAX CONTINUOUS TORQUE-----	120,000 IN-LB [13,558 N-m]
PEAK TORQUE-----	158,000 IN-LB [17,851 N-m]
MAX MOMENTARY TORQUE -----	210,000 IN-LB [23,726 N-m]
API 671 RATED SPEED-----	12,000 RPM

MASS ELASTIC DATA

RIGID (BORED) -----	23 LB [10.4 kg]	23 LB [10.4 kg]
ADAPTER (INCL. 1/2 DISC PACK) -----	9 LB [4.1 kg]	9 LB [4.1 kg]
SLEEVE (INCL. 1/2 DISC PACK) -----	9 LB [4.1 kg]	9 LB [4.1 kg]
SPACER -----	7 LB [3.2 kg]	
TOTAL COUPLING WEIGHT (BORED) -----	89 LB [40.4 kg]	
MOMENT OF INERTIA (WR ²) -----	800 LB-IN ² [0.23 kg-m ²]	
TORSIONAL STIFFNESS -----	4.0 X 10 ⁶ IN-LB/RAD	
(BASED ON 1/3 SHAFT PENETRATION)	[0.45 X 10 ⁶ N-m/RAD]	
DISC PACK ANGULAR STIFFNESS -----	1,800 IN-LB/DEG [203 N-m/DEG]	
LATERAL CRITICAL SPEED -----	110,800 RPM	
(SIMPLY SUPPORTED TUBE)		

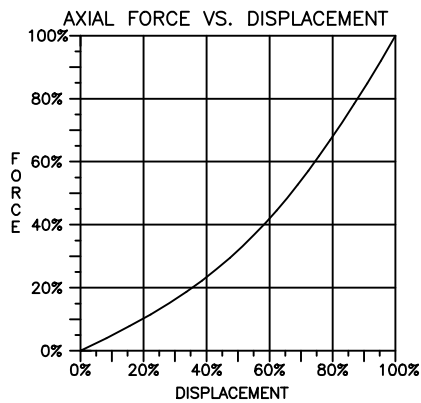

PRODUCTION DRAWINGS	
DRAWING NO.	DESCRIPTION
CC69883	SHIM PACK
CC68493	DISC PACK
1157867	ASSEMBLY DWG
ES-030-BL	BALANCE SPEC


□ — QUANTITY INCLUDES AN ADDITIONAL 10%
* — INDICATES 'SHIPPING SCREWS' NOT SHOWN.
'SHIPPING SCREWS' — YELLOW COLLAPSING CAPSCREWS
RED LOCKING SETSCREWS

NOTE: ALL 'SHIPPING SCREWS' MUST BE REMOVED AT FINAL ASSEMBLY.
(SEE INSTALLATION INSTRUCTION 16-602)

THIS DRAWING IS NOT APPROVED FOR MANUFACTURING

CUSTOMER COMMENTS:

INFORMATION NEEDED FROM CUSTOMER:

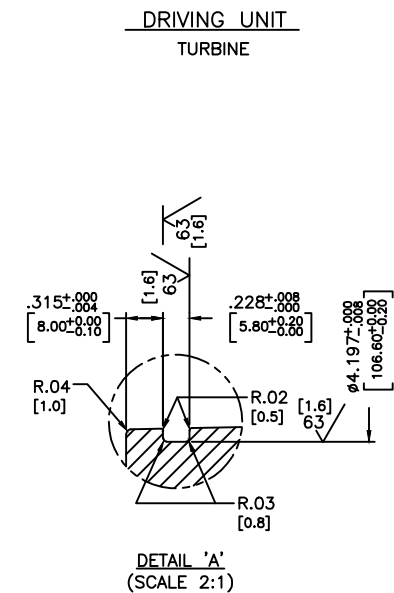

NOTES:

BALANCE REQUIREMENTS						DOES NOT CONTAINS DISC PACK WEIGHT	
BALANCE CRITERIA (METHOD 2)	RIGID		SPACER	CENTER ASS'Y (DVG END)	CENTER ASS'Y (DVN END)	ADAPTER (DVG & DVN)	SLEEVE (DVG & DVN)
	(DRIVING END)	(DRIVEN END)					
COMPONENT BALANCE	.52 g-in [13.2 g-mm]	.52 g-in [13.2 g-mm]	.28 g-in [7.2 g-mm]	.50 g-in [12.7 g-mm]	.48 g-in [12.1 g-mm]	.28 g-in [7.2 g-mm]	.28 g-in [7.2 g-mm]
ASS'Y CHECK BALANCE	DRIVING END	DRIVEN END					
	10.21 g-in [259.23 g-mm]	9.98 g-in [253.47 g-mm]					

	A	INITIAL RELEASE FOR APPROVAL	JNW	12/22/86	VKG VK

© 2025 REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. (OWNER) AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION, OR OTHER FIRM RECEIVING IT IS DEEMED BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.

PROJECT: 25136
ITEM: 326303027
SERVICE: TURBINE / HP COMPRESSOR



Regal Beloit America, Inc.