Chapter 4
Network Layer

A note on the use of these ppt slides:
We're making these slides freely available to all (faculty, students, readers). They're in PowerPoint form so you see the animations; and can add, modify, and delete slides (including this one) and slide content to suit your needs. They obviously represent a *lot* of work on our part. In return for use, we only ask the following:
- If you use these slides (e.g., in a class) that you mention their source (after all, we'd like people to use our book!)
- If you post any slides on a www site, that you note that they are adapted from (or perhaps identical to) our slides, and note our copyright of this material.

Thanks and enjoy! JFK/KWR



Computer Networking: A Top Down Approach
6th edition
Jim Kurose, Keith Ross
Addison-Wesley
March 2012

The course notes are adapted for Bucknell's CSCI 363
Xiannong Meng
Spring 2016

Chapter 4: outline

4.1 introduction
4.2 virtual circuit and datagram networks
4.3 what's inside a router
4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Interplay between routing, forwarding

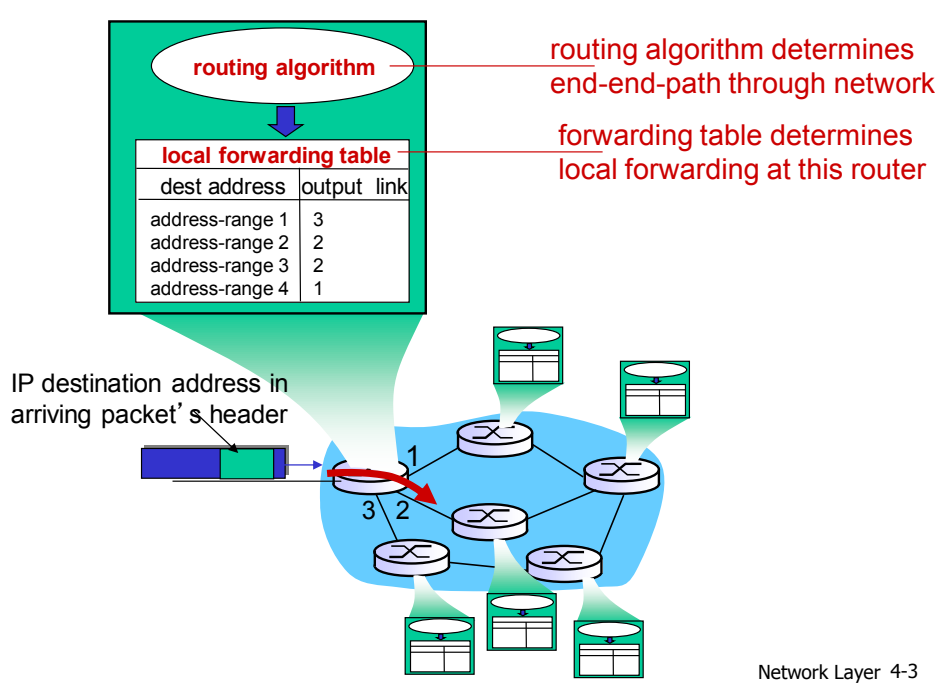

Graph abstraction



graph: G = (N,E)

N = set of routers = { u, v, w, x, y, z }

E = set of links ={ (u,v), (u,x), (v,x), (v,w), (x,w), (x,y), (w,y), (w,z), (y,z) }

aside: graph abstraction is useful in other network contexts, e.g., P2P, where *N* is set of peers and *E* is set of TCP connections

Graph abstraction: costs



c(x,x') = cost of link (x,x')
e.g., c(w,z) = 5

cost could always be 1, or inversely related to bandwidth, or inversely related to congestion

cost of path $(x_1, x_2, x_3, \ldots, x_p) = c(x_1,x_2) + c(x_2,x_3) + \ldots + c(x_{p-1},x_p)$

key question: what is the least-cost path between u and z ?
routing algorithm: algorithm that finds that least cost path

Routing algorithm classification

Q: global or decentralized information?

global:
- all routers have complete topology, link cost info
- "link state" algorithms

decentralized:
- router knows physically-connected neighbors, link costs to neighbors
- iterative process of computation, exchange of info with neighbors
- "distance vector" algorithms

Q: static or dynamic?

static:
- routes change slowly over time

dynamic:
- routes change more quickly
  - periodic update
  - in response to link cost changes

Chapter 4: outline

4.1 introduction
4.2 virtual circuit and datagram networks
4.3 what's inside a router
4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

A Link-State Routing Algorithm

Dijkstra's algorithm
- net topology, link costs known to all nodes
  - accomplished via "link state broadcast"
  - all nodes have same info
- computes least cost paths from one node ('source") to all other nodes
  - gives *forwarding table* for that node
- iterative: after k iterations, know least cost path to k dest.'s

notation:
- c(x,y): link cost from node x to y; = ∞ if not direct neighbors
- D(v): current value of cost of path from source to dest. v ('D' is for distance)
- p(v): predecessor node along path from source to v
- N': set of nodes whose least cost path definitively known

Dijsktra's Algorithm

```
Initialization:
  N' = {u}
  for all nodes v
    if v adjacent to u
       then D(v) = c(u,v)
    else D(v) = ∞

Loop
  find w not in N' such that D(w) is a minimum
  add w to N'
  update D(v) for all v adjacent to w and not in N' :
     D(v) = min( D(v), D(w) + c(w,v) )
  /* new cost to v is either old cost to v or known
   shortest path cost to w plus cost from w to v */
until all nodes in N'
```


Dijkstra's algorithm: an example

Step	N'	D(v),p(v)	D(w),p(w)	D(x),p(x)	D(y),p(y)	D(z),p(z)
0	u	2,u	5,u	1,u	∞	∞
1	ux	2,u	4,x		2,x	∞
2	uxy	2,u	3,y			4,y
3	uxyv		3,y			4,y
4	uxyvw					4,y
5	uxyvwz					



Dijkstra's algorithm: example (2)

resulting shortest-path tree from u:



resulting forwarding table in u:

destination	link
v	(u,v)
x	(u,x)
y	(u,x)
w	(u,x)
z	(u,x)

Dijkstra's algorithm: another example

Step	N'	D(v) p(v)	D(w) p(w)	D(x) p(x)	D(y) p(y)	D(z) p(z)
0	u	7,u	3,u	5,u	∞	∞
1						
2						
3						
4						
5						

notes:
- construct shortest path tree by tracing predecessor nodes
- ties can exist (can be broken arbitrarily)



Dijkstra's algorithm: another example

Step	N'	D(v) p(v)	D(w) p(w)	D(x) p(x)	D(y) p(y)	D(z) p(z)
0	u	7,u	3,u	5,u	∞	∞
1	uw	6,w		5,u	11,w	∞
2	uwx	6,w			11,w	14,x
3	uwxv				10,v	14,x
4	uwxvy					12,y
5	uwxvyz					

notes:

- construct shortest path tree by tracing predecessor nodes
- ties can exist (can be broken arbitrarily)



Dijkstra's algorithm, discussion

algorithm complexity: n nodes

- each iteration: need to check all nodes, w, not in N
- n(n+1)/2 comparisons: $O(n^2)$
- more efficient implementations possible (using min-heap as priority queue): O(nlogn)

oscillations possible:

- e.g., suppose link cost equals amount of carried traffic:



Initially, all zeros, when B, C, D sends data Into the network

given these costs, find new routing…. resulting in new costs

given these costs, find new routing…. resulting in new costs

given these costs, find new routing…. resulting in new costs

Chapter 4
Network Layer

A note on the use of these ppt slides:



Computer Networking: A Top Down Approach
6th edition
Jim Kurose, Keith Ross
Addison-Wesley
March 2012

The course notes are adapted for Bucknell's CSCI 363
Xiannong Meng
Spring 2016

Chapter 4: outline

4.1 introduction
4.2 virtual circuit and datagram networks
4.3 what' s inside a router
4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Distance vector algorithm

Bellman-Ford equation (dynamic programming)

let
$d_x(y)$:= cost of least-cost path from x to y
then

$$d_x(y) = \min_v \{c(x,v) + d_v(y)\}$$

cost from neighbor v to destination y
cost to neighbor v
min taken over all neighbors v of x

Bellman-Ford example



Assume we have computed,
$d_v(z) = 5$, $d_x(z) = 3$, $d_w(z) = 3$

B-F equation says:

$$\begin{aligned} d_u(z) &= \min \{ c(u,v) + d_v(z), \\ &\qquad c(u,x) + d_x(z), \\ &\qquad c(u,w) + d_w(z) \} \\ &= \min \{2 + 5, \\ &\qquad 1 + 3, \\ &\qquad 5 + 3\} = 4 \end{aligned}$$

node achieving minimum (in our case, *x*) is next hop in shortest path, used in forwarding table

Distance vector algorithm

- $D_x(y)$ = estimate of least cost from x to y
  - x maintains distance vector $\mathbf{D}_x = [D_x(y): y \in N]$
- node x:
  - knows cost to each neighbor v: $c(x,v)$
  - maintains its neighbors' distance vectors. For each neighbor v, x maintains $\mathbf{D}_v = [D_v(y): y \in N]$

Distance vector algorithm

key idea:

- from time-to-time, each node sends its own distance vector estimate to neighbors
- when x receives new DV estimate from neighbor, it updates its own DV using B-F equation:

$$D_x(y) \leftarrow \min_v\{c(x,v) + D_v(y)\} \text{ for each node } y \in N$$

- under minor, natural conditions, the estimate $D_x(y)$ *converge to the actual least cost* $d_x(y)$

Distance vector algorithm

iterative, asynchronous: each local iteration caused by:
- local link cost change
- DV update message from neighbor

distributed:
- each node notifies neighbors *only* when its DV changes
  - neighbors then notify their neighbors if necessary

each node:

wait for (change in local link cost or msg from neighbor)

recompute estimates

if DV to any dest has changed, *notify* neighbors

$D_x(y) = \min\{c(x,y) + D_y(y), c(x,z) + D_z(y)\}$
$= \min\{2+0 , 7+1\} = 2$

$D_x(z) = \min\{c(x,y) + D_y(z), c(x,z) + D_z(z)\}$
$= \min\{2+1 , 7+0\} = 3$

node x table

from \ cost to	x	y	z
x	0	2	7
y	∞	∞	∞
z	∞	∞	∞

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	7	1	0

node y table

from \ cost to	x	y	z
x	∞	∞	∞
y	2	0	1
z	∞	∞	∞

node z table

from \ cost to	x	y	z
x	∞	∞	∞
y	∞	∞	∞
z	7	1	0

time



$D_x(y) = \min\{c(x,y) + D_y(y), c(x,z) + D_z(y)\}$
$= \min\{2+0 , 7+1\} = 2$

$D_x(z) = \min\{c(x,y) + D_y(z), c(x,z) + D_z(z)\}$
$= \min\{2+1 , 7+0\} = 3$

node x table

from \ cost to	x	y	z
x	0	2	7
y	∞	∞	∞
z	∞	∞	∞

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	7	1	0

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

node y table

from \ cost to	x	y	z
x	∞	∞	∞
y	2	0	1
z	∞	∞	∞

from \ cost to	x	y	z
x	0	2	7
y	2	0	1
z	7	1	0

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

node z table

from \ cost to	x	y	z
x	∞	∞	∞
y	∞	∞	∞
z	7	1	0

from \ cost to	x	y	z
x	0	2	7
y	2	0	1
z	3	1	0

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

time



Distance vector: link cost changes

link cost changes:
- node detects local link cost change
- updates routing info, recalculates distance vector
- if DV changes, notify neighbors



"good news travels fast"

t_0 : *y* detects link-cost change, updates its DV, informs its neighbors.

t_1 : *z* receives update from *y*, updates its table, computes new least cost to *x* , sends its neighbors its DV.

t_2 : *y* receives *z*'s update, updates its distance table. *y*'s least costs do *not* change, so *y* does *not* send a message to *z*.

Distance vector: link cost changes

link cost changes:
- node detects local link cost change
- *bad news travels slow* - "count to infinity" problem, e.g., c(x,y) is changed from 4 to 60
- Initially, $D_y(x) = 4$, $D_z(x) = 5$, so next update leads to $D_y(x) = 6$, $D_z(x) = 7$, next, $D_y(x) = 8$, $D_z(x) = 9$, …



the "count-to-infinity problem"

poisoned reverse:
- If Z routes through Y to get to X :
  - Z tells Y its (Z's) distance to X is infinite (so Y won't route to X via Z)
- will this completely solve count to infinity problem?

Other means to tackle count-to-infinity

- Split-horizon: if a node *X* learns the route to *Y* through *Z*, the X should not be part of the advertising to node *Z* to reach *Y*.
- Hold-down timer: a router starts a hold-down-timer when new routing information is available. It doesn't update its own routing information until the timer expires.

https://www.techopedia.com/definition/14850/split-horizon
https://www.techopedia.com/definition/25073/hold-down-timer

Comparison of LS and DV algorithms

message complexity
- **LS:** with n nodes, E links, O(nE) msgs sent
- **DV:** exchange between neighbors only
  - convergence time varies

speed of convergence
- **LS:** $O(n^2)$ algorithm requires O(nE) msgs
  - may have oscillations
- **DV:** convergence time varies
  - may be routing loops
  - count-to-infinity problem

robustness: what happens if router malfunctions?

LS:
- node can advertise incorrect *link* cost
- each node computes only its *own* table

DV:
- DV node can advertise incorrect *path* cost
- each node' s table used by others
  - error propagate thru network

Chapter 4: outline

Hierarchical routing

our routing study thus far - idealization
- all routers identical
- network "flat"

… *not* true in practice

scale: with 600 million destinations:
- can' t store all dest' s in routing tables!
- routing table exchange would swamp links!

administrative autonomy
- internet = network of networks
- each network admin may want to control routing in its own network

Hierarchical routing

- aggregate routers into regions, "autonomous systems" (AS)
- routers in same AS run same routing protocol
  - "intra-AS" routing protocol
  - routers in different AS can run different intra-AS routing protocol

gateway router:
- at "edge" of its own AS
- has link to router in another AS

Interconnected ASes

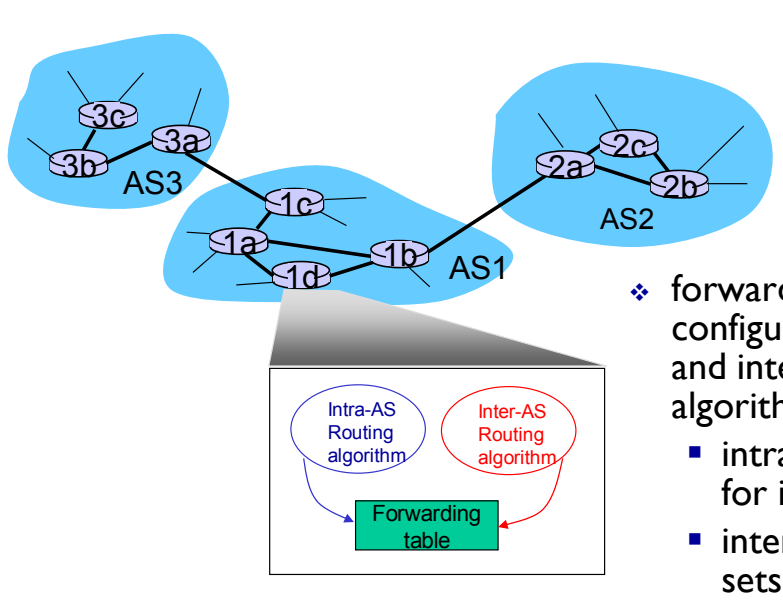

- forwarding table configured by both intra- and inter-AS routing algorithm
  - intra-AS sets entries for internal dests
  - inter-AS & intra-AS sets entries for external dests

Inter-AS tasks

- suppose router in AS1 receives datagram destined outside of AS1:
  - router should forward packet to gateway router, but which one?

AS1 must:
1. learn which dests are reachable through AS2, which through AS3
2. propagate this reachability info to all routers in AS1

job of inter-AS routing!

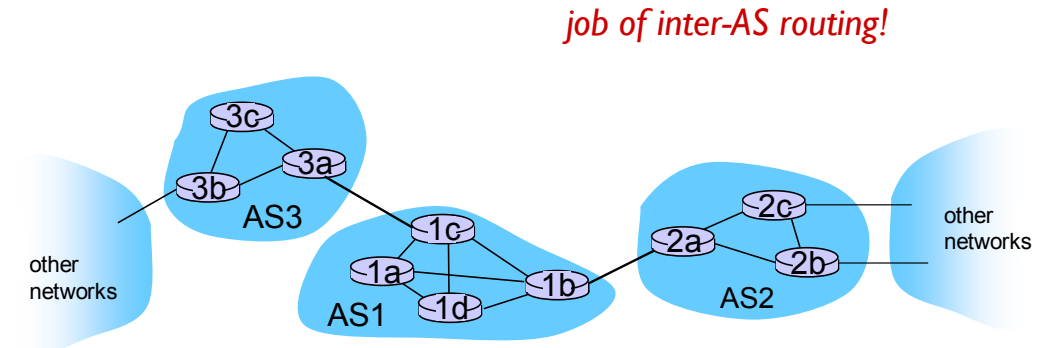

Example: setting forwarding table in router 1d

- suppose AS1 learns (via inter-AS protocol) that subnet *x* reachable via AS3 (gateway 1c), but not via AS2
  - inter-AS protocol propagates reachability info to all internal routers
- router 1d, which has three out-going links (1 for c, 2 for a,3 for b), determines from intra-AS routing info that its interface *I* is on the least cost path to 1c
  - installs forwarding table entry *(x,I)*

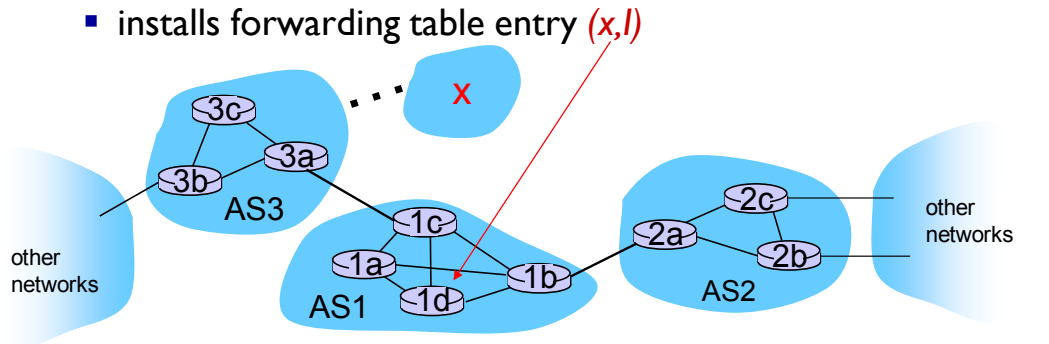

Example: choosing among multiple ASes

- now suppose AS1 learns from inter-AS protocol that subnet *x* is reachable from AS3 *and* from AS2.
- it is the job of inter-AS routing protocol to determine which gateway it should forward packets towards for dest x

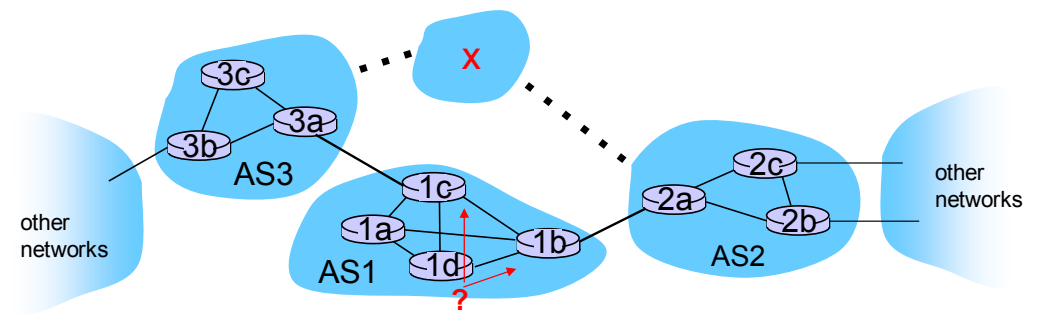

Example: choosing among multiple ASes

- in the presence of multiple ASes to reach a destination, to configure forwarding table, router 1d must determine towards which gateway it should forward packets for dest x
- *hot potato routing: send* packet towards closest of two routers. (closest → smallest cost)



Chapter 4 Network Layer

A note on the use of these ppt slides:
We're making these slides freely available to all (faculty, students, readers). They're in PowerPoint form so you see the animations; and can add, modify, and delete slides (including this one) and slide content to suit your needs. They obviously represent a *lot* of work on our part. In return for use, we only ask the following:
- If you use these slides (e.g., in a class) that you mention their source (after all, we'd like people to use our book!)
- If you post any slides on a www site, that you note that they are adapted from (or perhaps identical to) our slides, and note our copyright of this material.

Thanks and enjoy! JFK/KWR



Computer Networking: A Top Down Approach
6[th] edition
Jim Kurose, Keith Ross
Addison-Wesley
March 2012

The course notes are adapted for Bucknell's CSCI 363
Xiannong Meng
Spring 2016

Chapter 4: outline

Intra-AS Routing

- also known as *interior gateway protocols (IGP)*
- most common intra-AS routing protocols:
  - RIP: Routing Information Protocol (Distance Vector)
  - OSPF: Open Shortest Path First (Link State)
  - IGRP: Interior Gateway Routing Protocol (Cisco proprietary)

RIP (Routing Information Protocol)

- included in BSD-UNIX distribution in 1982
- distance vector algorithm
  - distance metric: # hops (max = 15 hops), each link has cost 1
  - DVs exchanged with neighbors every 30 sec in response message (aka advertisement) in UDP packet
  - each advertisement: list of up to 25 destination *subnets* *(in IP addressing sense)*



from router A to destination *subnets:*

subnet	hops
u	1
v	2
w	2
x	3
y	3
z	2

RIP: example



routing table in router D

destination subnet	next router	# hops to dest
w	A	2
y	B	2
z	B	7
x	--	1
….	….	….

RIP: example

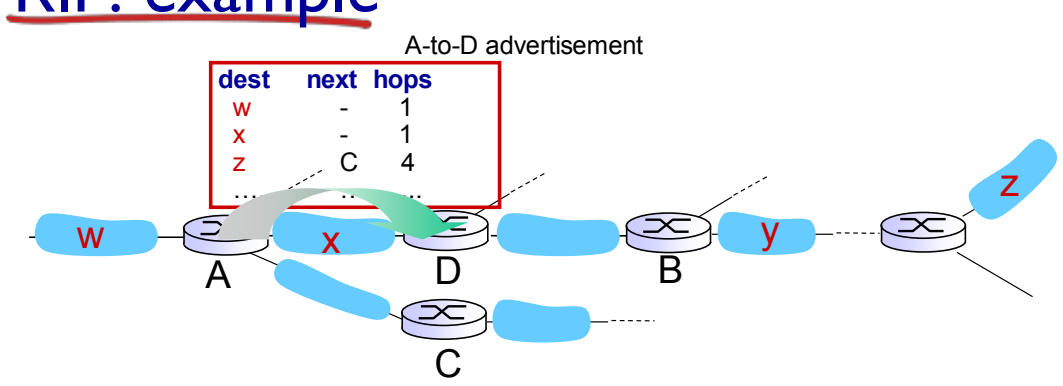

routing table in router D

destination subnet	next router	# hops to dest
w	A	2
y	B	2
z	~~B~~ A	~~7~~ 5
x	--	1
….	….	….

RIP: link failure, recovery

if no advertisement heard after 180 sec -->
neighbor/link declared dead

- routes via neighbor invalidated
- new advertisements sent to neighbors
- neighbors in turn send out new advertisements (if tables changed)
- link failure info quickly (?) propagates to entire net
- *poison reverse* used to prevent ping-pong loops (infinite distance = 16 hops)

RIP table processing

- RIP routing tables managed by *application-level* process called route-d (daemon)
- advertisements sent in UDP packets, periodically repeated

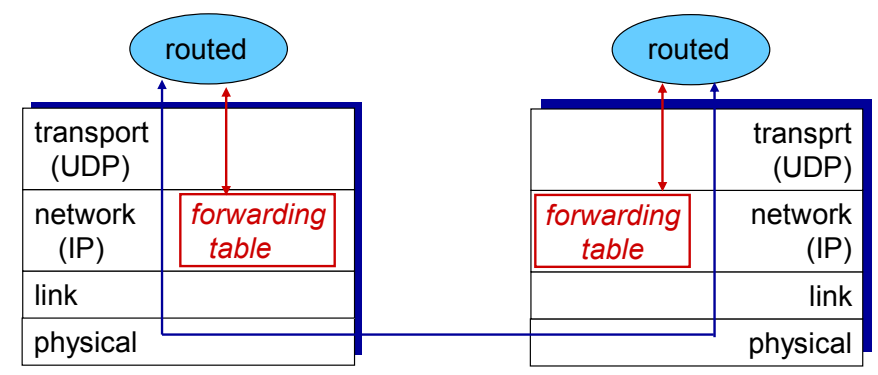

RIP current status

- *In most current networking environments, RIP is not the preferred choice for routing as its time to converge and scalability are poor compared to EIGRP, OSPF, or IS-IS (the latter two being link-state routing protocols), and (without RMTI) a hop limit severely limits the size of network it can be used in.* (quote from Wikipedia http://en.wikipedia.org/wiki/Routing_Information_Protocol)

OSPF (Open Shortest Path First)

- "open": publicly available
- uses link state algorithm
  - LS packet dissemination
  - topology map at each node
  - route computation using Dijkstra's algorithm
- OSPF advertisement carries one entry per neighbor
- advertisements flooded to *entire* AS
  - carried in OSPF messages directly over IP (rather than TCP or UDP
- *IS-IS routing* protocol: nearly identical to OSPF (IS-IS: Intermediate System to Intermediate System), except that it is under the OSI-ISO 7-layer model

OSPF "advanced" features (not in RIP)

- *security:* all OSPF messages authenticated (to prevent malicious intrusion)
- multiple same-cost paths allowed (only one path in RIP)
- for each link, multiple cost metrics for different TOS (e.g., satellite link cost set "low" for best effort ToS; high for real time ToS)
- integrated uni- and multicast support:
  - Multicast OSPF (MOSPF) uses same topology data base as OSPF
- hierarchical OSPF in large domains.

Hierarchical OSPF

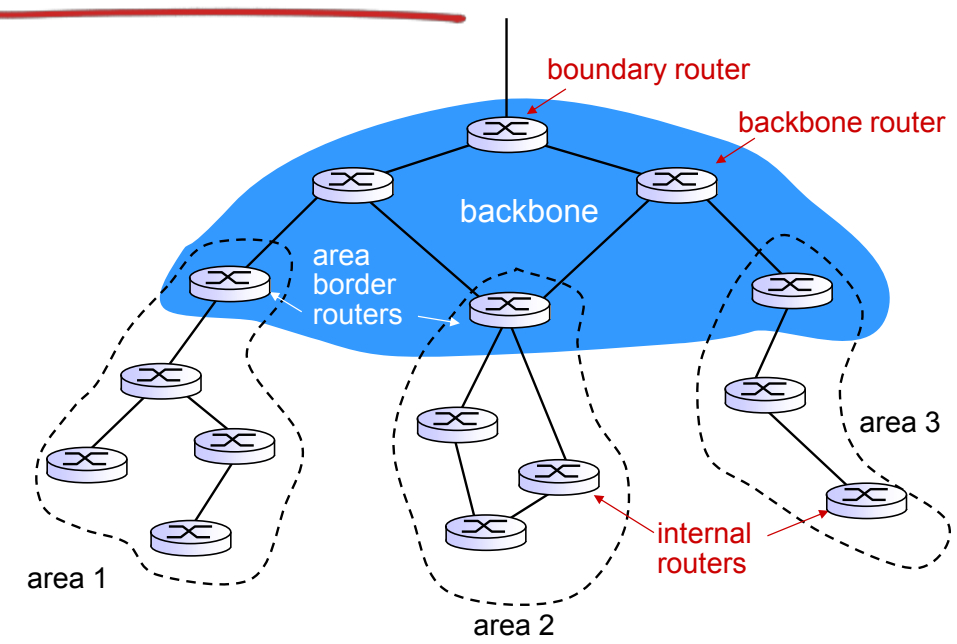

Hierarchical OSPF

- *two-level hierarchy:* local area, backbone.
  - link-state advertisements only in area
  - each nodes has detailed area topology; only know direction (shortest path) to nets in other areas.
- *area border routers:* "summarize" distances to nets in own area, advertise to other Area Border routers.
- *backbone routers:* run OSPF routing limited to backbone.
- *boundary routers:* connect to other AS' s.

Internet inter-AS routing: BGP

- BGP (Border Gateway Protocol): *the* de facto inter-domain routing protocol
  - "glue that holds the Internet together"
- BGP provides each AS a means to:
  - eBGP: obtain subnet reachability information from neighboring ASs. ('e' for extended)
  - iBGP: propagate reachability information to all AS-internal routers. ('i' for internal)
  - determine "good" routes to other networks based on reachability information and policy.
- allows subnet to advertise its existence to rest of Internet: *"I am here"*
- BGP use TCP to communicate with each other

BGP basics

- BGP session: two BGP routers ("peers") exchange BGP messages:
  - advertising *paths* to different destination network prefixes ("path vector" protocol)
  - exchanged over semi-permanent TCP connections
- when AS3 advertises a prefix to AS1: (prefix eg: 132.84.3.12/18)
  - AS3 *promises* it will forward datagrams towards that prefix
  - AS3 can aggregate prefixes in its advertisement



BGP basics: distributing path information

- using eBGP session between 3a and 1c, AS3 sends prefix reachability info to AS1.
  - 1c can then use iBGP do distribute new prefix info to all routers in AS1
  - 1b can then re-advertise new reachability info to AS2 over 1b-to-2a eBGP session
- when router learns of new prefix, it creates entry for prefix in its forwarding table.



Path attributes and BGP routes

- advertised prefix includes BGP attributes
  - prefix + attributes = "route"
- two important attributes:
  - AS-PATH: contains ASs through which prefix advertisement has passed: e.g., AS 67, AS 17
  - NEXT-HOP: indicates specific internal-AS router to next-hop AS. (may be multiple links from current AS to next-hop-AS)
- gateway router receiving route advertisement uses import policy to accept/decline
  - e.g., never route through AS x
  - *policy-based* routing

BGP route selection

- router may learn about more than 1 route to destination AS, selects route based on:
  1. local preference value attribute: policy decision
  2. shortest AS-PATH
  3. closest NEXT-HOP router: hot potato routing
  4. additional criteria

BGP messages

- BGP messages exchanged between peers over TCP connection
- BGP messages:
  - OPEN: opens TCP connection to peer and authenticates sender
  - UPDATE: advertises new path (or withdraws old)
  - KEEPALIVE: keeps connection alive in absence of UPDATES; also ACKs OPEN request
  - NOTIFICATION: reports errors in previous msg; also used to close connection

BGP routing policy



- A,B,C are *provider networks*
- X,W,Y are customer (of provider networks)
- X is *dual-homed:* attached to two networks
  - X does not want to route from B via X to C
  - .. so X will not advertise to B a route to C

BGP routing policy (2)



- A advertises path AW to B
- B advertises path BAW to X
- Should B advertise path BAW to C?
  - No way! B gets no "revenue" for routing CBAW since neither W nor C are B's customers
  - B wants to force C to route to w via A
  - B wants to route *only* to/from its customers!

Why different Intra-, Inter-AS routing ?

policy:
- inter-AS: admin wants control over how its traffic routed, who routes through its net.
- intra-AS: single admin, so no policy decisions needed

scale:
- hierarchical routing saves table size, reduced update traffic

performance:
- intra-AS: can focus on performance
- inter-AS: policy may dominate over performance

Some interesting router statistics

- http://www.cidr-report.org/as2.0/
- http://mrtg.net.princeton.edu/statistics/routers.html

Chapter 4
Network Layer

A note on the use of these ppt slides:
We're making these slides freely available to all (faculty, students, readers). They're in PowerPoint form so you see the animations; and can add, modify, and delete slides (including this one) and slide content to suit your needs. They obviously represent a *lot* of work on our part. In return for use, we only ask the following:

- If you use these slides (e.g., in a class) that you mention their source (after all, we'd like people to use our book!)
- If you post any slides on a www site, that you note that they are adapted from (or perhaps identical to) our slides, and note our copyright of this material.

Thanks and enjoy! JFK/KWR



Computer Networking: A Top Down Approach
6th edition
Jim Kurose, Keith Ross
Addison-Wesley
March 2012

The course notes are adapted for Bucknell's CSCI 363
Xiannong Meng
Spring 2016

Chapter 4: outline

Broadcast routing

- deliver packets from source to all other nodes
- source duplication is inefficient:

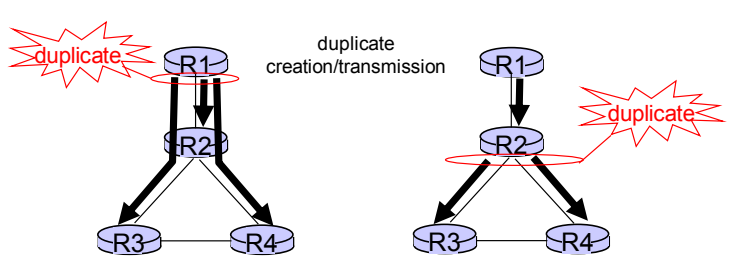

source duplication | in-network duplication

- source duplication: how does source determine recipient addresses?

In-network duplication

- *flooding:* when node receives broadcast packet, sends copy to all neighbors
  - problems: cycles & broadcast storm
- *controlled flooding:* node only broadcasts pkt if it hasn't broadcast same packet before
  - node keeps track of packet ids already broadcasted
  - or reverse path forwarding (RPF): only forward packet if it arrived on shortest path between node and source
- *spanning tree:*
  - no redundant packets received by any node

Spanning tree

- first construct a spanning tree
- nodes then forward/make copies only along spanning tree

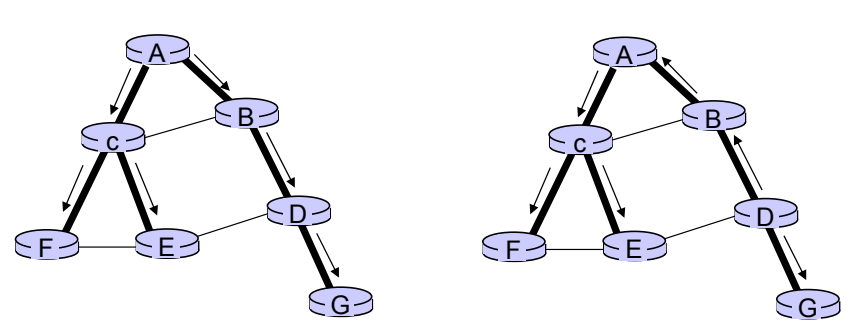

(a) broadcast initiated at A
(b) broadcast initiated at D

Spanning tree: creation

- center node
- each node sends unicast join message to center node
  - message forwarded until it arrives at a node already belonging to spanning tree

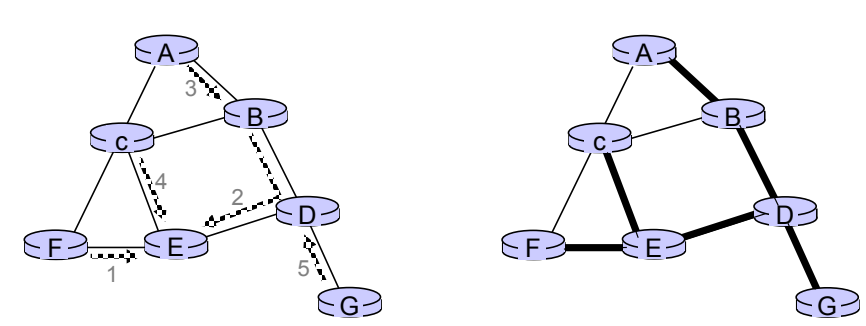

(a) stepwise construction of spanning tree (center: E)
(b) constructed spanning tree

Multicast routing: problem statement

goal: find a tree (or trees) connecting routers having local mcast group members

- *tree:* not all paths between routers used
- *shared-tree:* same tree used by all group members
- *source-based:* different tree from each sender to rcvrs

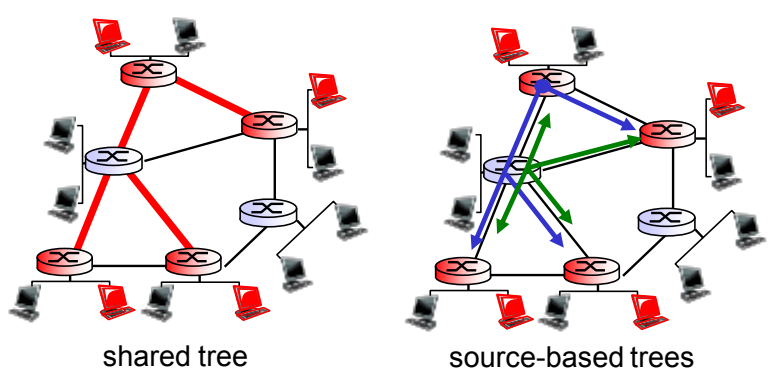



Approaches for building mcast trees

approaches:

- *source-based tree:* one tree per source
  - shortest path trees
  - reverse path forwarding
- *group-shared tree:* group uses one tree
  - minimal spanning (Steiner)
  - center-based trees

…we first look at basic approaches, then specific protocols adopting these approaches

Shortest path tree

- mcast forwarding tree: tree of shortest path routes from source to all receivers
  - Dijkstra's algorithm





Reverse path forwarding

- rely on router's knowledge of unicast shortest path from it to sender
- each router has simple forwarding behavior:

> ***if*** (mcast datagram received on incoming link on shortest path back to center)
> ***then*** flood datagram onto all outgoing links of the spanning tree
> ***else*** ignore datagram

Reverse path forwarding: example





- result is a source-specific *reverse* SPT
  - may be a bad choice with asymmetric links

Reverse path forwarding: pruning

- forwarding tree contains subtrees with no mcast group members
  - no need to forward datagrams down subtree
  - "prune" msgs sent upstream by router with no downstream group members





Center-based trees

- single delivery tree shared by all
- one router identified as *"center"* of tree
- to join:
  - edge router sends unicast *join-msg* addressed to center router
  - *join-msg* "processed" by intermediate routers and forwarded towards center
  - *join-msg* either hits existing tree branch for this center, or arrives at center
  - path taken by *join-msg* becomes new branch of tree for this router

Center-based trees: example

suppose R6 chosen as center:

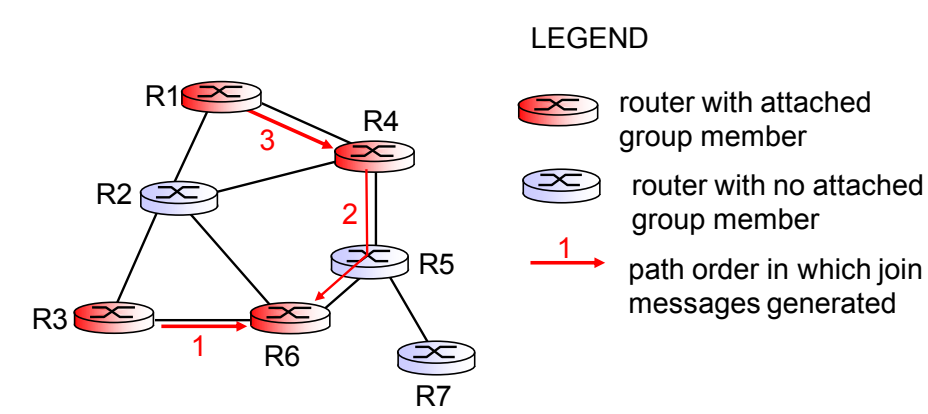

Internet Multicasting Routing: DVMRP

- DVMRP: distance vector multicast routing protocol, RFC1075
- *flood and prune:* reverse path forwarding, source-based tree
  - RPF tree based on DVMRP's own routing tables constructed by communicating DVMRP routers
  - no assumptions about underlying unicast
  - initial datagram to mcast group flooded everywhere via RPF
  - routers not wanting group: send upstream prune msgs

DVMRP: continued…

- *soft state:* DVMRP router periodically (1 min.) "forgets" branches are pruned:
  - mcast data again flows down unpruned branch
  - downstream router: reprune or else continue to receive data
- routers can quickly regraft to tree
  - following IGMP join at leaf
- commonly implemented in commercial router

Tunneling

Q: how to connect "islands" of multicast routers in a "sea" of unicast routers?



- mcast datagram encapsulated inside "normal" (non-multicast-addressed) datagram
- normal IP datagram sent thru "tunnel" via regular IP unicast to receiving mcast router (recall IPv6 inside IPv4 tunneling)
- receiving mcast router unencapsulates to get mcast datagram