E-BOX BACKPLATE 560×560 mm (enclosure 600×600×200 IP65, steel, mounted at the rear)

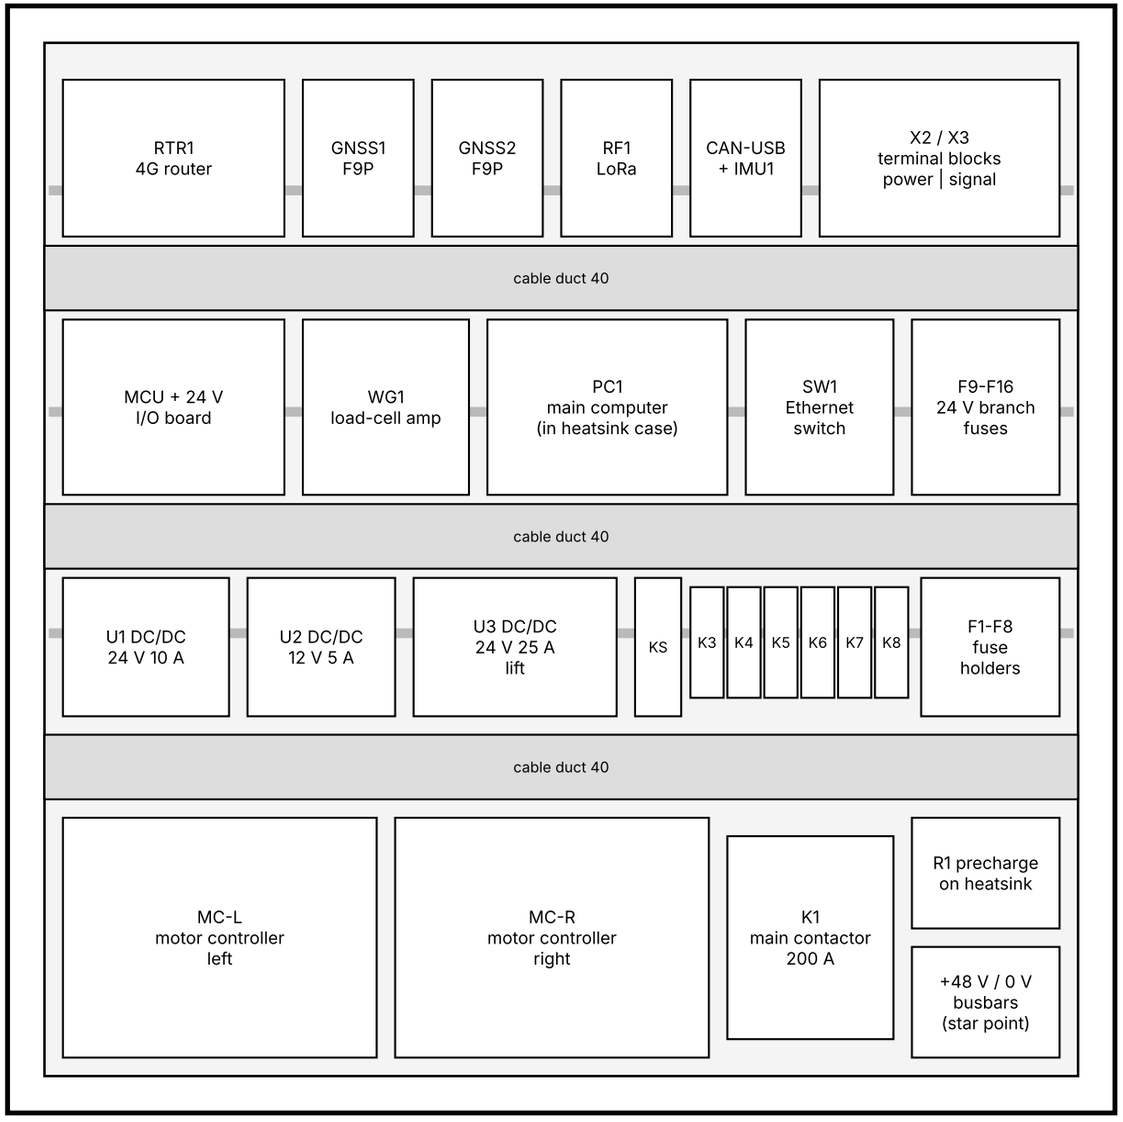

RIGHT SIDE: S1 battery isolator (key), X1 charge inlet
LEFT SIDE: IP65 breather vent + filter fan (thermostat 40 °C)
DOOR: nothing mounted (keeps it sealed)

BUILD NOTES
- 3 mm aluminium backplate = heat spreader for MC-L/R
- power wiring kept in row A, signals rows C/D
- CAN and Ethernet away from motor cables
- label every wire both ends with its number
- all connectors IP67: Deutsch DT (signals), M12 (sensors/CAN/ETH), Anderson (power)

BOTTOM FACE (all cables enter from below, drip loop):

- X10 MC-L motor 3~ + encoder
- X11 MC-R motor 3~ + encoder
- X12 brakes YB1/YB2
- X13 lift M3/M4 + limits
- X14 load cells LC1-LC4 (4× M12)
- X15 front bar: LiDAR, CAM-F, ES1/ES2, edge BF
- X16 rear: ES3/ES4, CAM-R, HMI1, beacon, BR, GNSS1/2
- batteries BT1a/b + / – (4 × 25 mm² glands)

BINBOT — autonomous olive bin carrier

E-BOX LAYOUT (front view, door open)

DWG E-04 REV A SCALE ≈ 1:4 mm

PRELIMINARY 2026-10-28