


SIDE VIEW

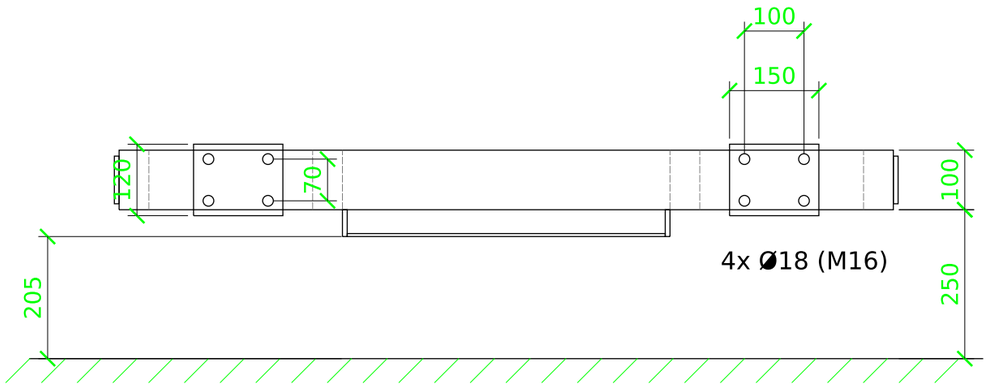

FRONT VIEW

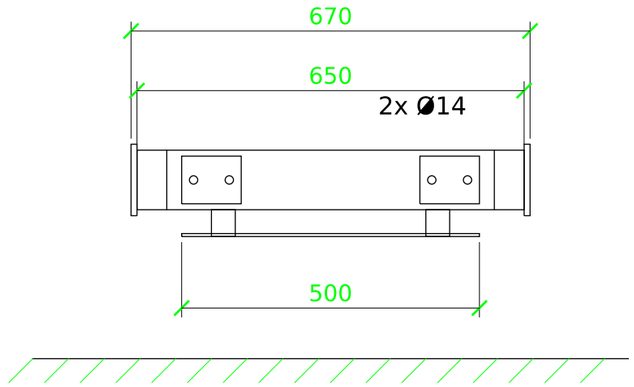

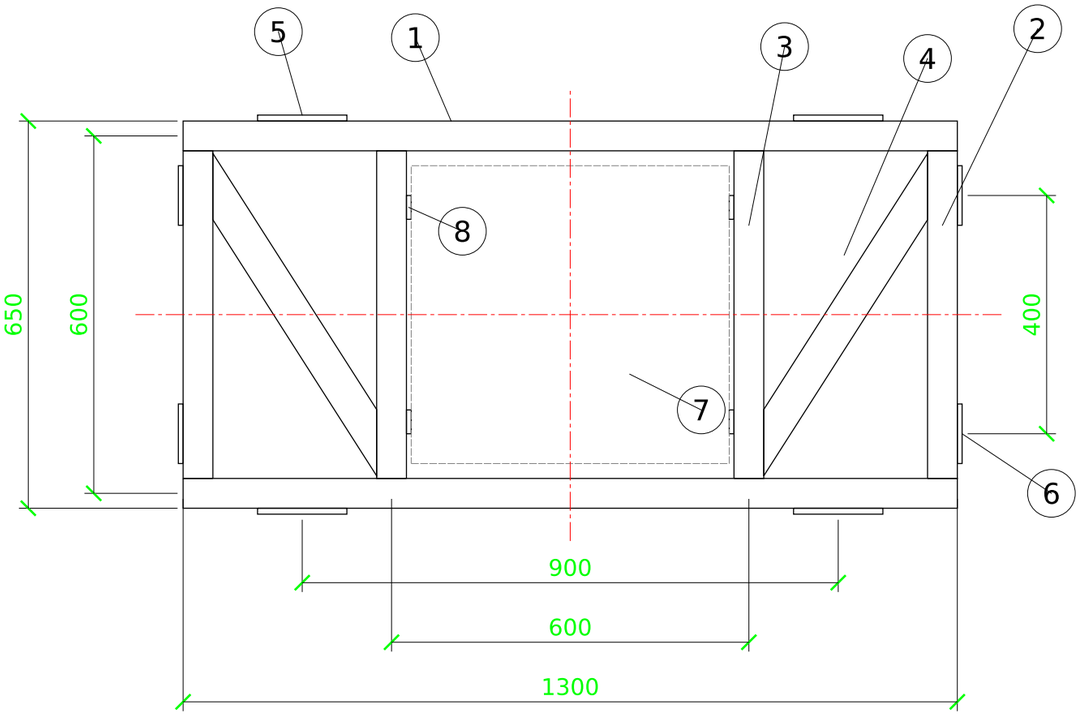

TOP VIEW

CUT LIST

#	Part	Section	L mm	Qty	kg
1	Side rail	RHS 100x50x4	1300	2	23.2
2	End cross beam	RHS 100x50x4	550	2	9.8
3	Inner cross beam	RHS 100x50x4	550	2	9.8
4	Diagonal brace, cut to fit	RHS 60x60x4	607	2	8.5
5	U/C bracket, 4x Ø18	PL 10 150x120	150	4	5.7
6	Bumper tab, 2x Ø14	PL 8 100x80	100	4	2.0
7	Battery tray	PL 5 534x500	534	1	10.5
8	Tray hanger	FL 40x8	95	4	1.0

TOTAL ≈ 70 kg

NOTES

1. Material: RHS S355J2H (EN 10219), plate/flat S355J2. S235 only with next size up.
2. MIG weld, fillet a4 all round unless noted. Weld frame on a flat table, clamped.
3. Top faces of items 1 flat within ±1 mm (lift + load cells sit here, BP-02).
4. Items 5: drill to MATCH UNDERCARRIAGE DRAWING; shim gap to track frame.
5. Ø8 drain hole at the low point of every closed RHS. Deburr all edges.
6. Zinc-rich primer + 2-part epoxy. General tolerance ±2 mm.
7. Frame bolts to undercarriage with 4x M16 8.8 per bracket, torque 210 Nm.

BINBOT — autonomous olive bin carrier

UPPER FRAME — WELDMENT (FABRICATE)

DWG 002 REV A SCALE 1:10 (A3) UNITS mm

PRELIMINARY — undercarriage values assumed 2026-10-28