


SIDE VIEW

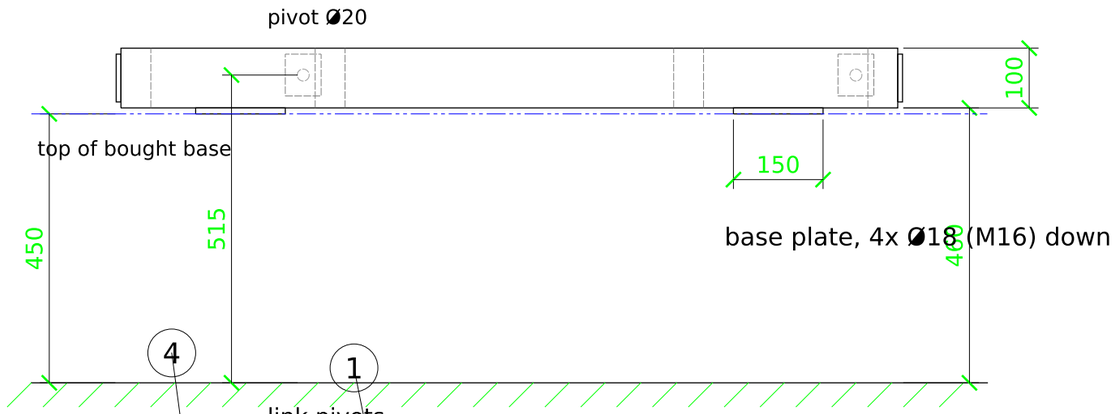

FRONT VIEW

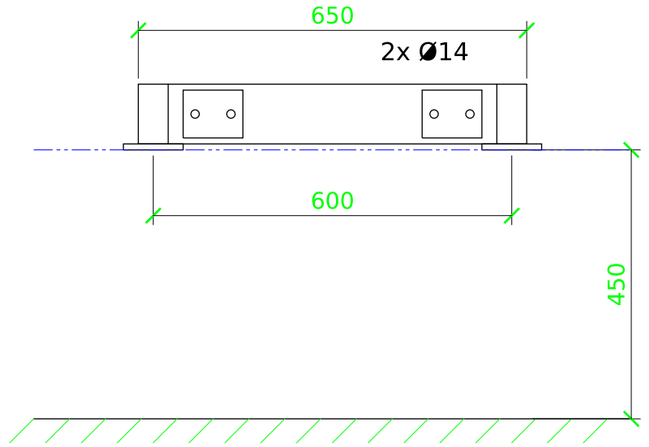

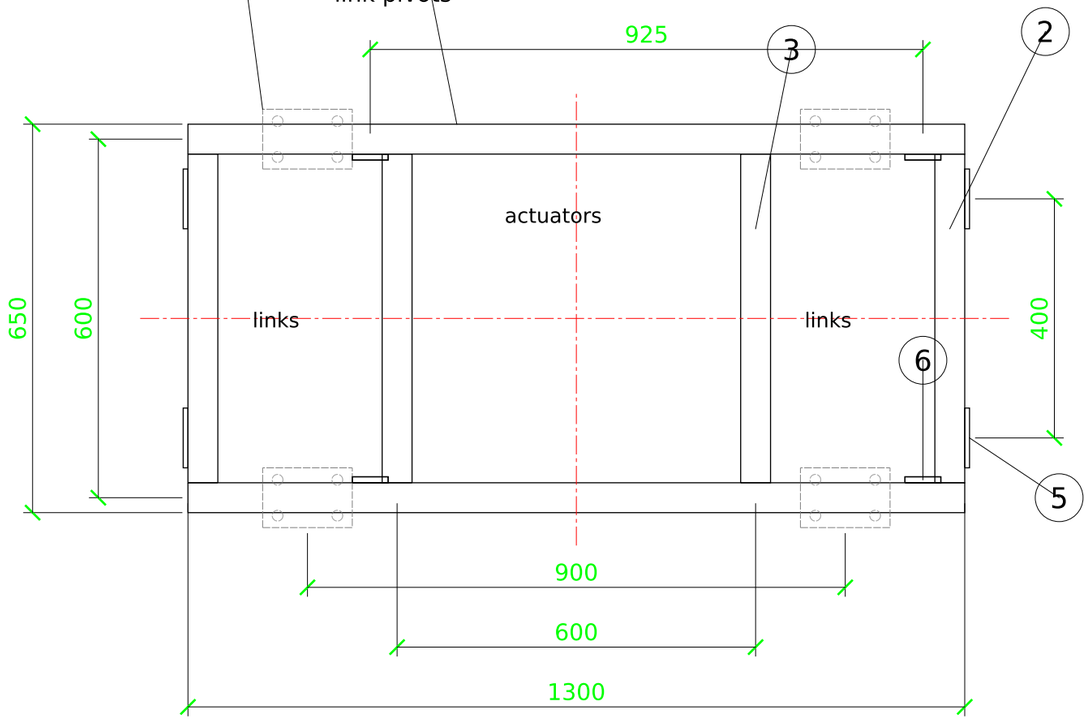

TOP VIEW

CUT LIST

#	Part	Section	L mm	Qty	kg
1	Side rail	RHS 100x50x4	1300	2	23.2
2	End cross beam	RHS 100x50x4	550	2	9.8
3	Inner cross beam	RHS 100x50x4	550	2	9.8
4	Base plate, 4x Ø18	PL 10 150x100	150	4	4.7
5	Tab (sensor bar / E-box)	PL 8 100x80	100	4	2.0
6	Link pivot plate, Ø20	PL 10 60x70	60	8	2.6

TOTAL ≈ 52 kg

NOTES

1. Material: RHS S355J2H (EN 10219), plate/angle S355J2. MIG, fillet a4 all round.
2. Weld on a flat table, clamped. Rail tops flat within ±1 mm (lift bars run here).
3. Items 4: drill to MATCH THE BASE TOP. The base is not modified (use its holes/rails).
4. Items 6: pivot holes line-bored in pairs (both rails together) for parallel links.
5. Ø8 drain hole at the low point of every closed RHS. Deburr. Optional 8 mm corner gussets.
6. Zinc-rich primer + 2-part epoxy. General tolerance ±2 mm. 4x M16 8.8 per bracket, 210 Nm.

BINBOT — autonomous olive bin carrier

TOP FRAME — WELDMENT (FABRICATE)

DWG 002 REV C SCALE 1:10 (A3) UNITS mm

PRELIMINARY — undercarriage values assumed 2026-10-28