


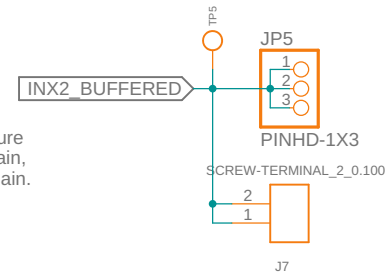
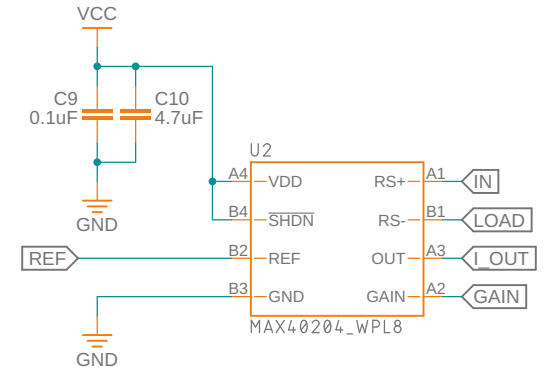
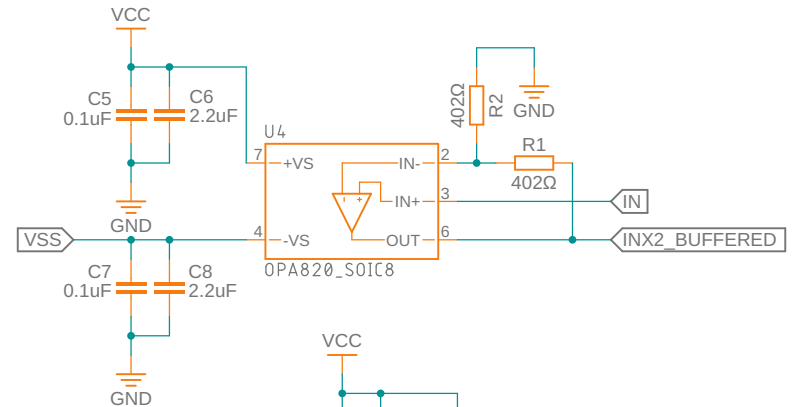
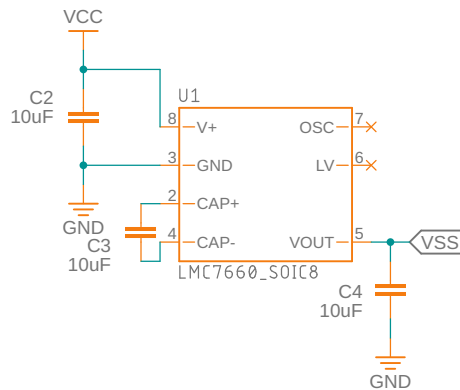

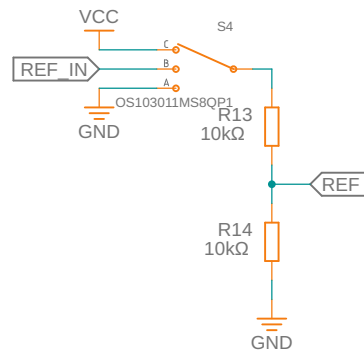
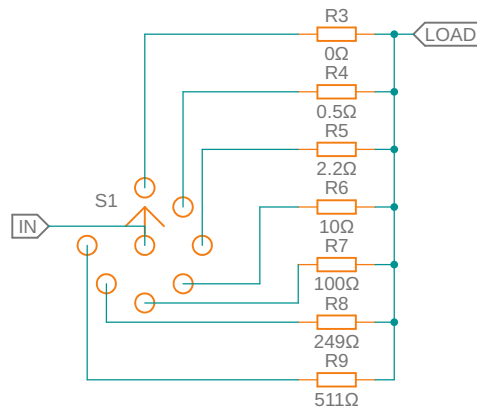



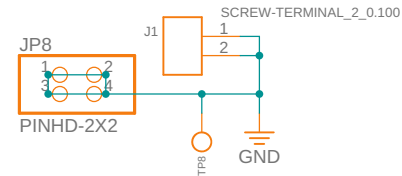


VCC valid range: 3.3 - 5 V

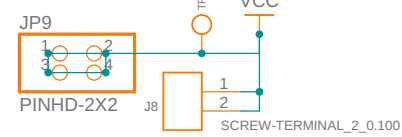

Set REF to be half of VCC to configure the MAX40204 for bi-directional operation, and to GND for unidirectional operation.

Set GAIN to GND to configure the MAX40204 to 10 V/V gain, and to VCC for a 100 V/V gain.

Soil Power Sensor

Author: Gabriel Marcano

Date: 1/5/2022 11:51 AM

REV:
A

Sheet: 1/1