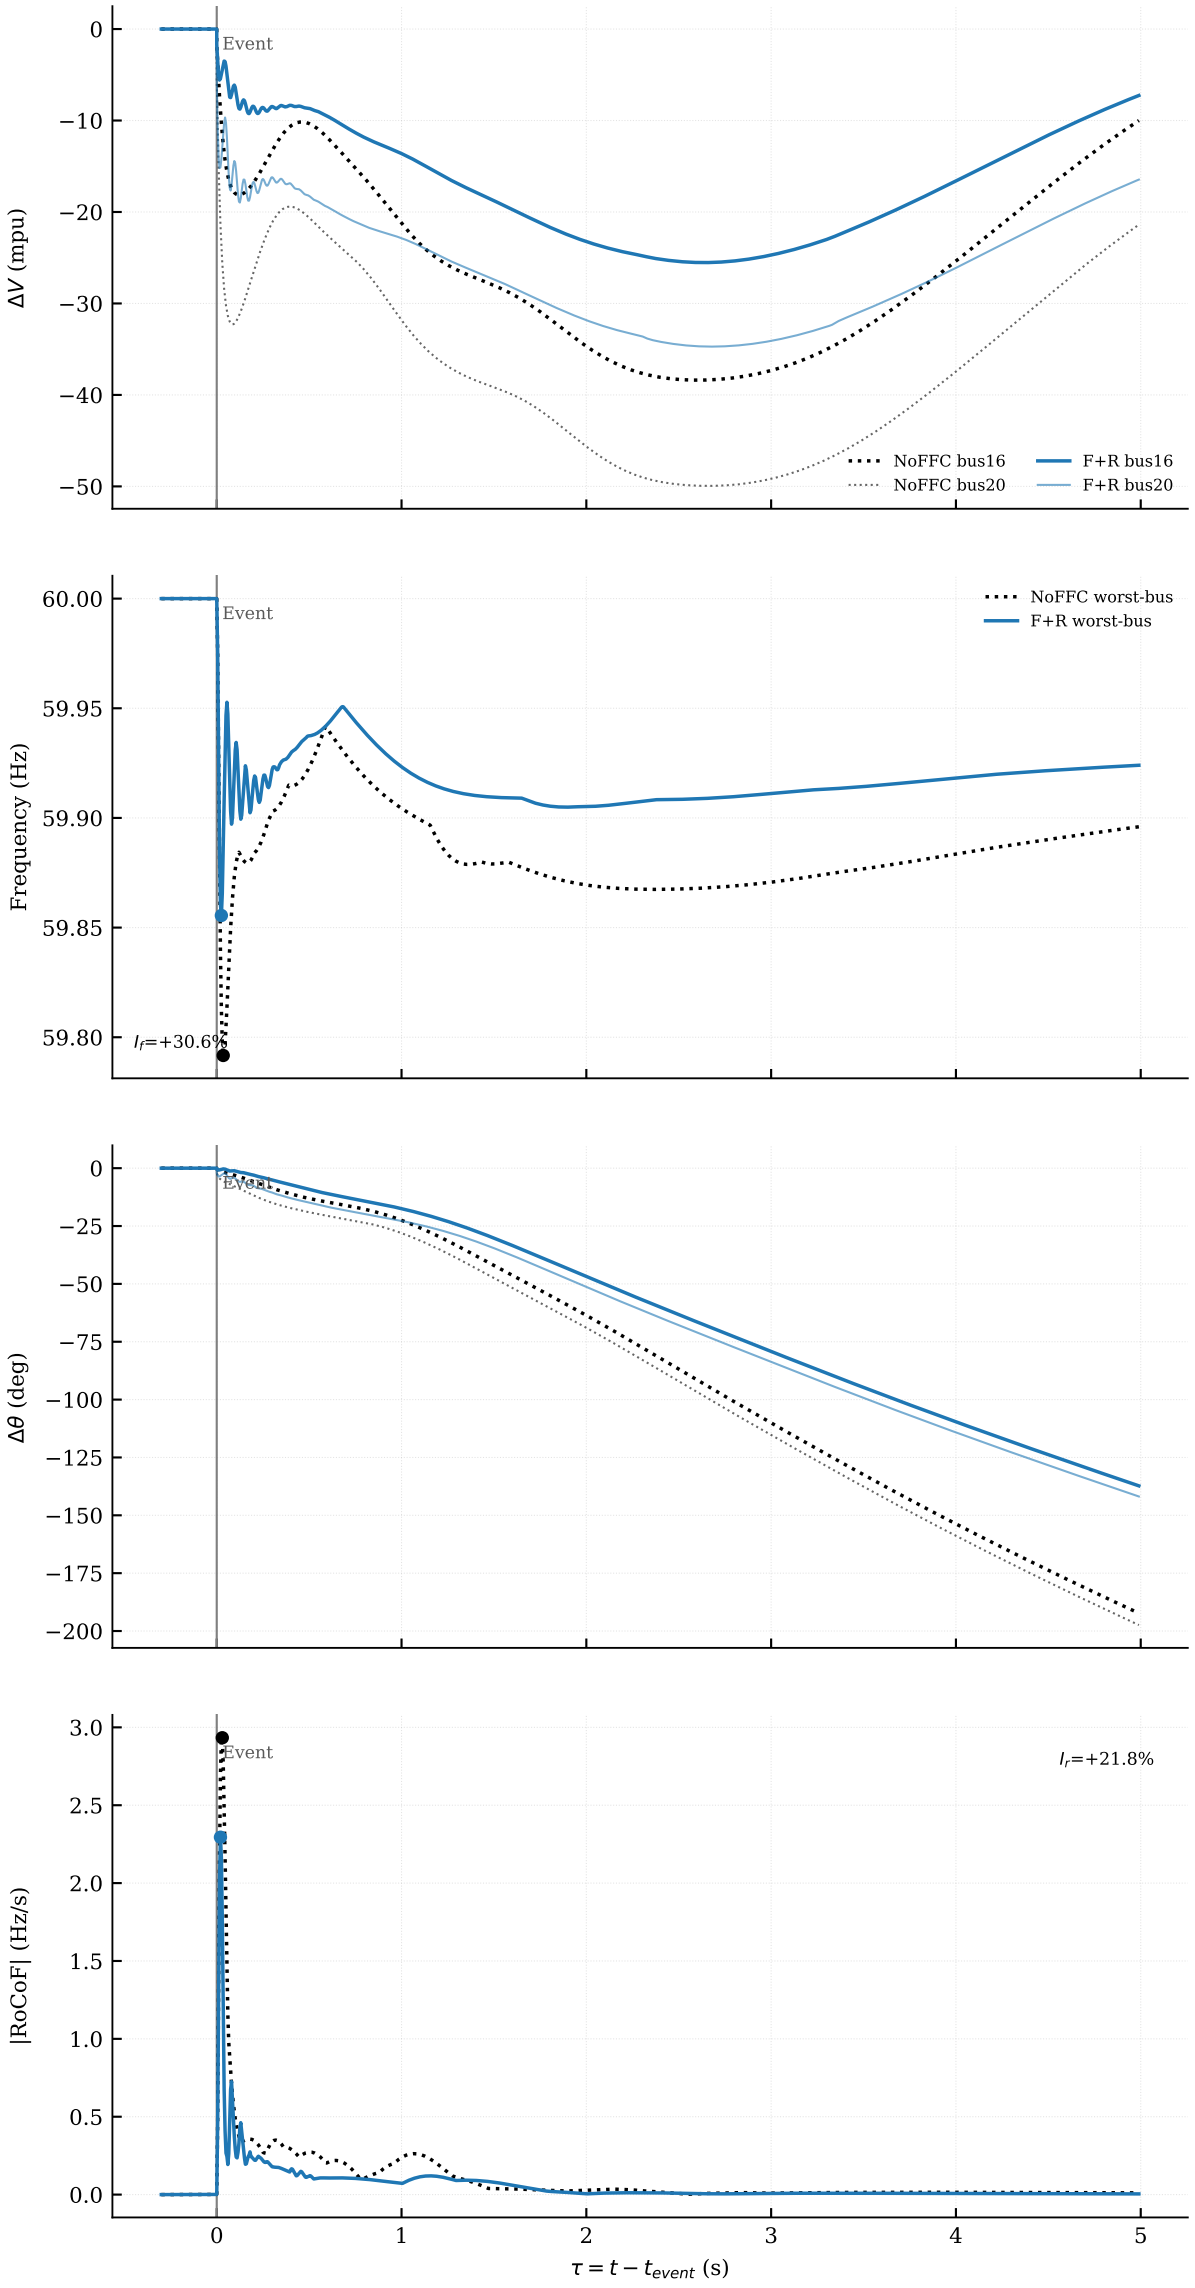
Event
ΔV (mpu)
NoFFC bus16
NoFFC bus20
F+R bus16
F+R bus20
Event
Frequency (Hz)
NoFFC worst-bus
F+R worst-bus
I_f=+30.6%
Event
Δθ (deg)
Event
|RoCoF| (Hz/s)
I_f=+21.8%
$\tau = t - t_{event}$ (s)