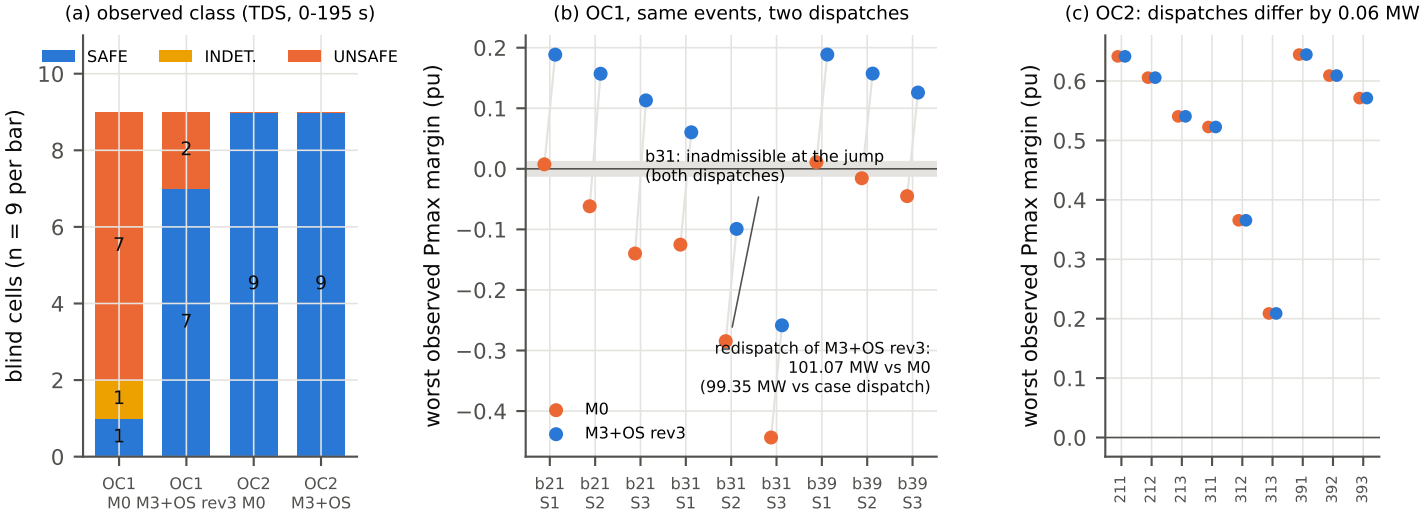
(a) observed class (TDS, 0-195 s)
SAFE
INDET.
UNSAFE
blind cells (n = 9 per bar)
10
8
6
4
2
0
7
1
1
2
7
9
9
OC1
M0
OC1
M3+OS rev3
OC2
M0
OC2
M3+OS
(b) OC1, same events, two dispatches
worst observed Pmax margin (pu)
0.2
0.1
0.0
−0.1
−0.2
−0.3
−0.4
b31: inadmissible at the jump
(both dispatches)
redispatch of M3+OS rev3:
101.07 MW vs M0
(99.35 MW vs case dispatch)
M0
M3+OS rev3
b21 S1
b21 S2
b21 S3
b31 S1
b31 S2
b31 S3
b39 S1
b39 S2
b39 S3
(c) OC2: dispatches differ by 0.06 MW
worst observed Pmax margin (pu)
0.6
0.5
0.4
0.3
0.2
0.1
0.0
211
212
213
311
312
313
391
392
393