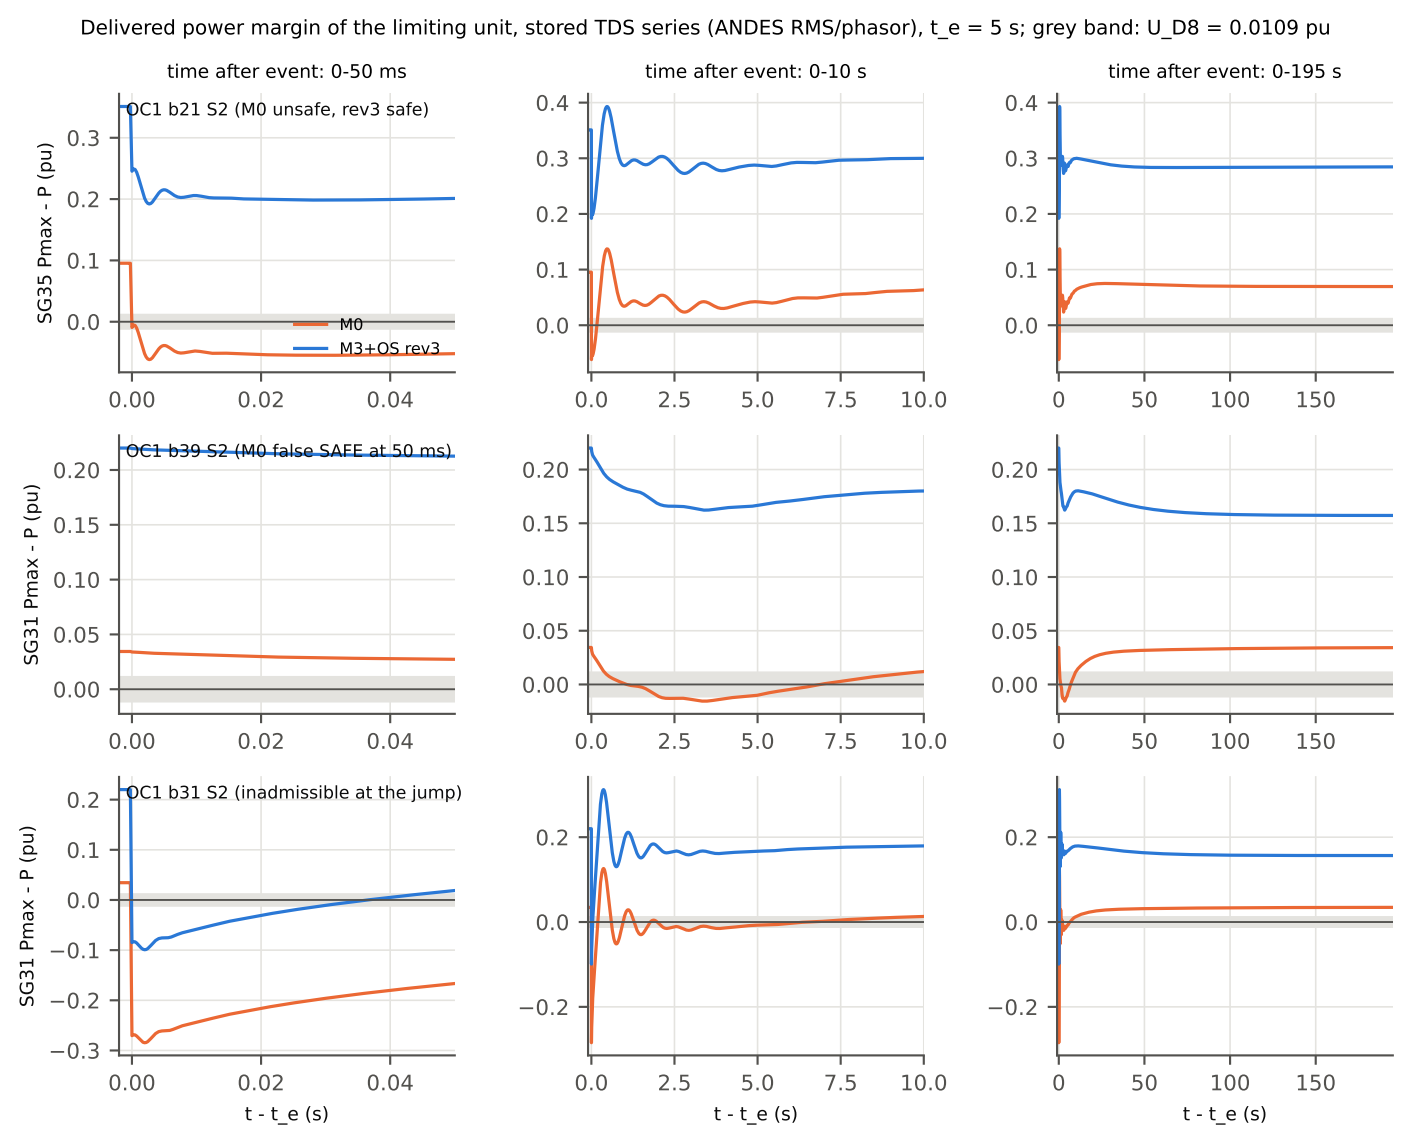
Delivered power margin of the limiting unit, stored TDS series (ANDES RMS/phasor), t_e = 5 s; grey band: U_D8 = 0.0109 pu
time after event: 0-50 ms
time after event: 0-10 s
time after event: 0-195 s
OC1 b21 S2 (M0 unsafe, rev3 safe)
OC1 b39 S2 (M0 false SAFE at 50 ms)
OC1 b31 S2 (inadmissible at the jump)
SG35 Pmax - P (pu)
SG31 Pmax - P (pu)
SG31 Pmax - P (pu)
M0
M3+OS rev3
t - t_e (s)
t - t_e (s)
t - t_e (s)