

Gemini Near Infra-Red Imager and Wavefront Sensor



Near IR Imager (NIRI) and On-Instrument Wavefront Sensor (OIWFS)—Architectural Design Document

Hubert Yamada

niri_h ty_001 / 05 / 1999-10-23

This report gives a architectural software design for the Gemini “Near Infra-Red Imager and On-Instrument Wavefront Sensor software.”

1 Introduction

This report gives an architectural software design for the Near Infra-Red Imager (NIRI) and provides description of its software decomposition.

1.1 Purpose of the document

This document describes the difference between the NIRI design and the template which is provided by the CICS, described in [15]. It is assumed that the reader of this document is familiar with that document.

The intended audience of this document is:

- the NIRI reviewers;
- the developers of the Gemini Observatory Control System (OCS);
- the developers of the Gemini Acquisition and Guidance units
- the developers of the GNIRS OIWFS components controller and other groups which will be using the design of the NIRI OIWFS.

1.2 Scope

The software product to be developed from this document will be control software for the Near Infra-Red Imager (NIRI).

1.3 Definitions, Acronyms and Abbreviations

See “Near IR Imager (NIRI)—Definitions, Abbreviations, and References”.

1.4 Stylistic Conventions


References to documents in Section 1.5, “References,” on page 2 of “Near IR Imager (NIRI)—Definitions, Abbreviations, and References” are given like this; [1].

1.5 References

See “Near IR Imager (NIRI)—Definitions, Abbreviations, and References”.

2 Implementation

At this time, the NIRI software is expected to follow the CICS architectural design very closely. The differences will be detailed in a later version of this document.

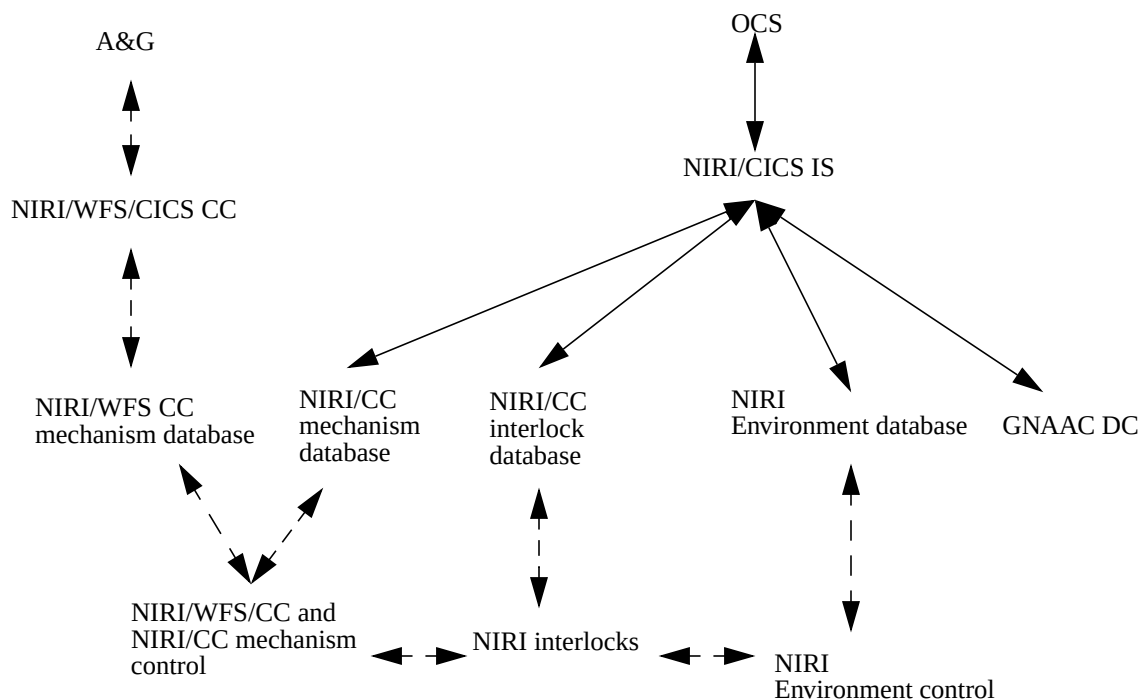

Solid lines represent commands that are linked by apply records