


MCU: STM32U083 + SWD (Tag-Connect TC2030)

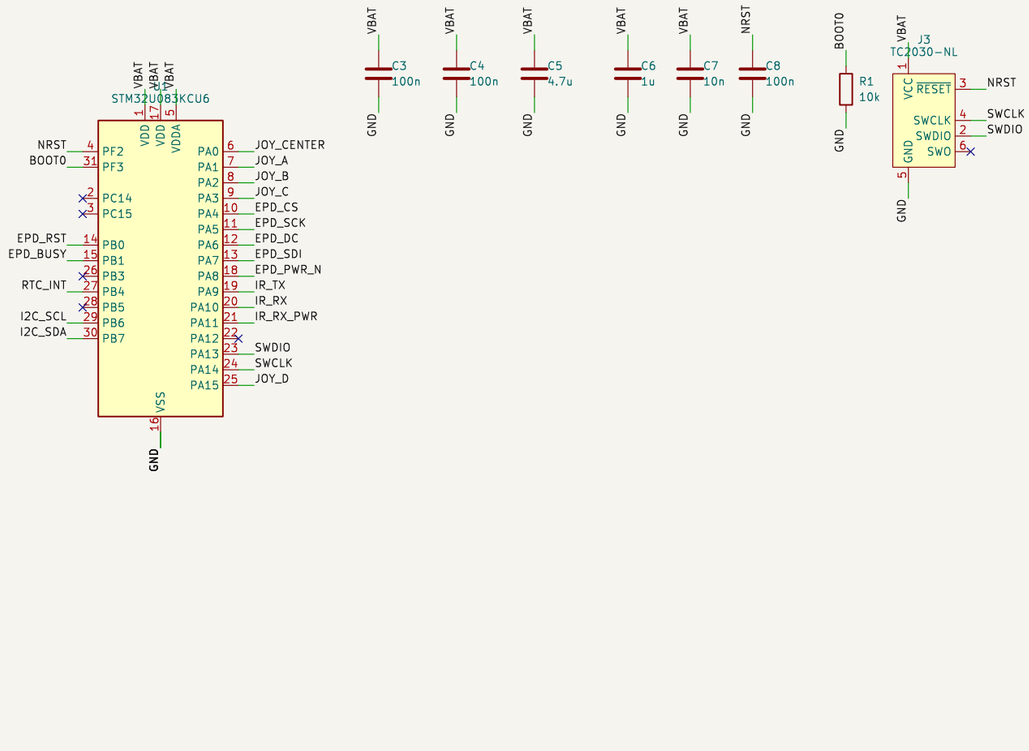


Power: CR2450, reverse protection, bulk capacitance

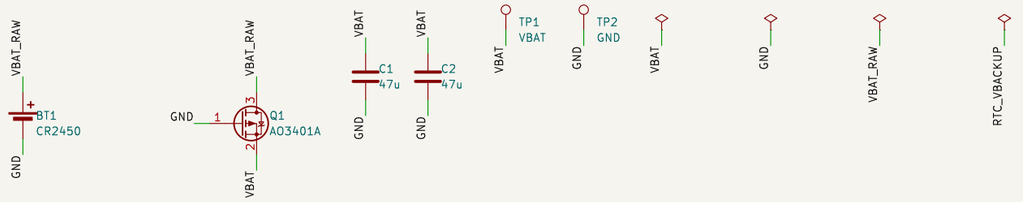


RTC: RV-3032-C7 (temperature compensated)

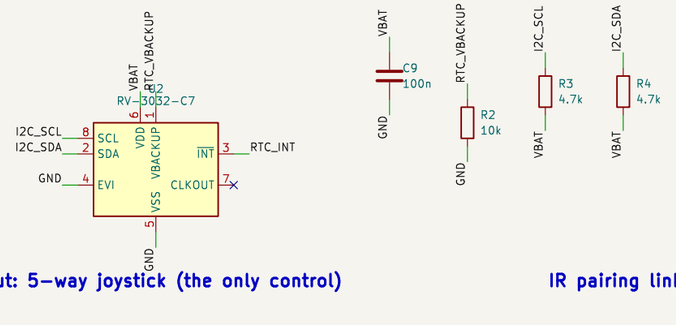


Input: 5-way joystick (the only control)




IR pairing link (4800 baud UART, inverted)

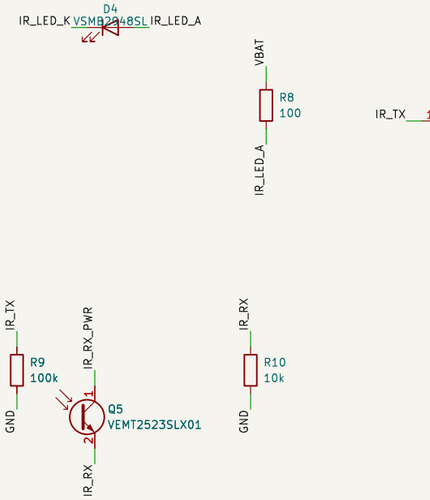

E-paper: GDEY0213B74 (SSD1680), booster, power switch

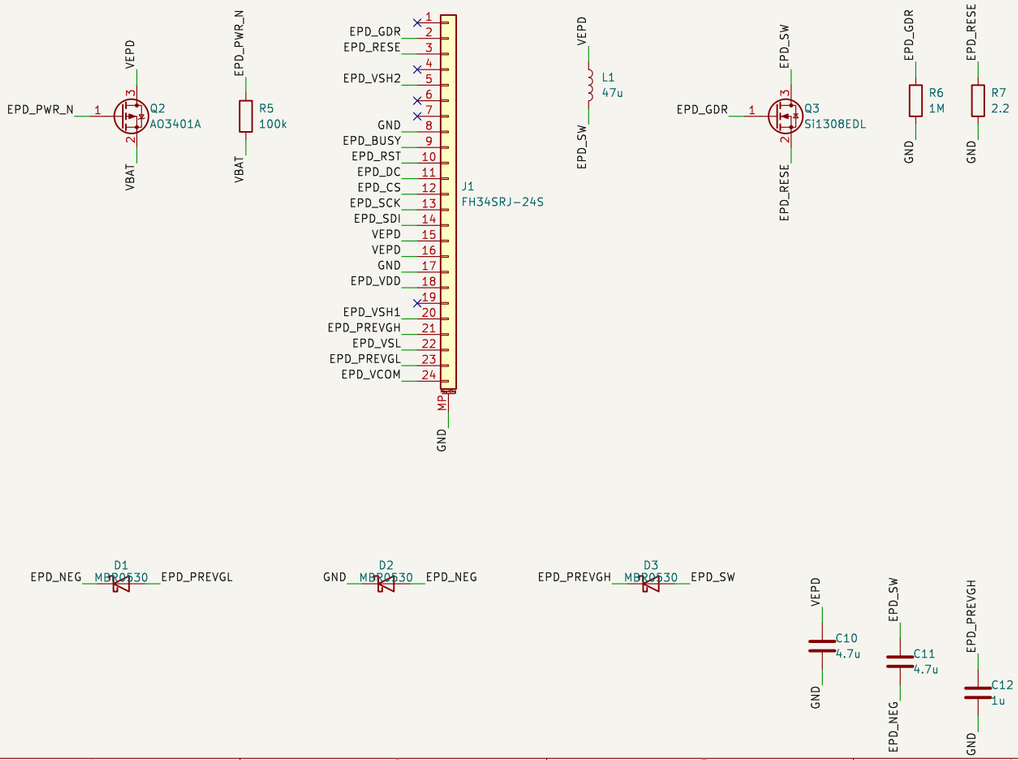

Mechanical



Licence: CERN-OHL-S-2.0
github.com/gemivnet/IRL2FA
irl2fa.com

Sheet: /
File: irl2fa.kicad_sch

Title: IRL2FA – air-gapped person-to-person 2FA

Size: A3	Date: 2026-10-29	**Rev: 0.1**
KiCad E.D.A. 9.0.9		Id: 1/1