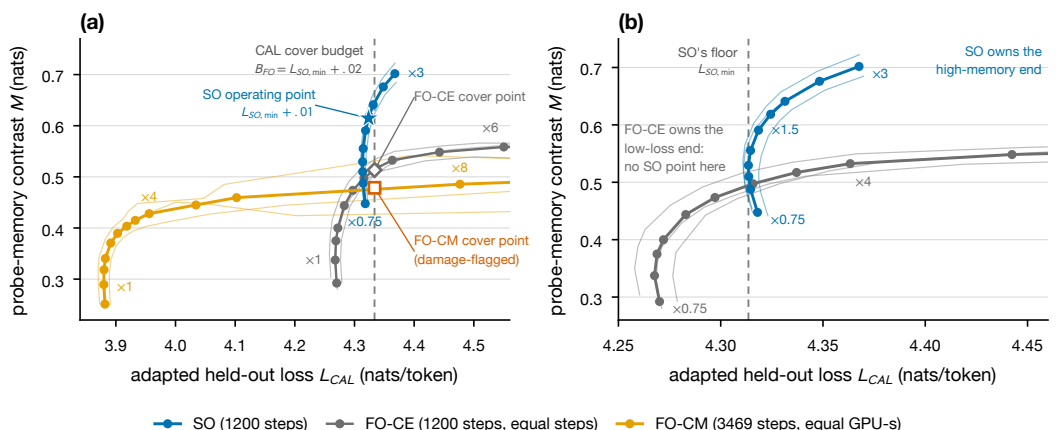
(a)
(b)
probe-memory contrast M (nats)
adapted held-out loss L_{CAL} (nats/token)
CAL cover budget
$B_{FO} = L_{SO,\,min} + .02$
SO operating point
$L_{SO,\,min} + .01$
FO-CE cover point
FO-CM cover point
(damage-flagged)
SO's floor
$L_{SO,\,min}$
SO owns the
high-memory end
FO-CE owns the
low-loss end:
no SO point here
×1
×1.5
×3
×4
×6
×8
×0.75
SO (1200 steps)
FO-CE (1200 steps, equal steps)
FO-CM (3469 steps, equal GPU-s)