

PFS5000x12-240SL5050RGBW-24V

Multi-colour Bendable RGBW Flexible LED

Features

- Full colour bendable flexible LED light source
- Four in one 5050 RGBW LED emitters
- LED density 48 LEDs/metre
- Easy to cut at 125mm intervals
- Wide 120° angle of emission
- Low power, low heat, long life
- 3M Adhesive backing tape



Applications: POS Display equipment & lighting

Configuration

Parameter	Rating	Unit
LED emitters PLCC 5050	240 pcs 5.0x5.0mm	TOTAL / reel
LED pitch	20.8mm	mm
Dimensions	5000x12mm cuttable at 125mm intervals	
Termination	5x Flying wire leads 200mm long	
Connection	5 wire: Red, Green, Blue, White with Common +ve	

Electro-optical characteristics Ta=25°C

Part Number	nm	QTY/M	Luminous Flux (LM/M)	Current/M (24VDC)	Rated Power (W/M)
PFS5000x12-240SL5050RGBWx-24v	620-630	48 LEDs/m	120	0.16A	3.8W
	520-535		362	0.16A	3.8W
	460-475		97	0.16A	3.8W
	6000K		380	0.16A	3.8W
	4000K		380	0.16A	3.8W
	3000K		380	0.16A	3.8W
	2700K		380	0.16A	3.8W

Operating Voltage	24v	Vdc
Current Consumption	14.4W	W/metre
Operating Temp	-25~40°C;Tc: 75°C (max)	°C
Storage Temp	-0 to +55°C	°C




T +44 (0) 1942 671122 E sales@plusopto.co.uk

W plusopto.co.uk W plusopto.com

B13 Derwent Court William Way Moss Industrial Estate Leigh Lancashire WN7 3PT

Dimensions

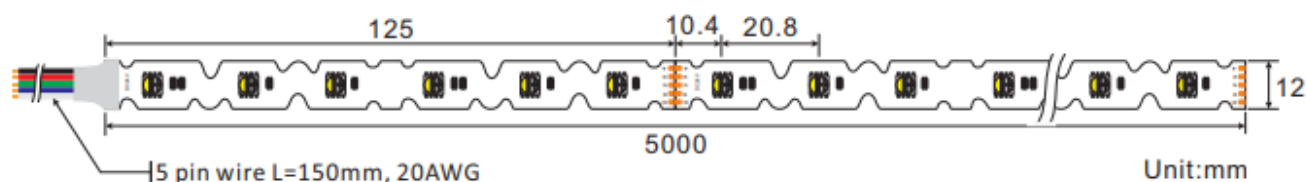

Handling notes:

Ensure that the correct low voltage dc power supply is matched to the flexible strip specification

Avoid repeated bending of the strip as this will damage the circuit and components and please observe the maximum bend radius of 30mm

Avoid handling of the surface components in particular the LED emitters as any pressure may result in damage and latent failures.

When cutting IP65 the ingress protection will be compromised please ensure that the assembly is re-sealed accordingly in order to maintain the IP rating

Installation notes:

To achieve a consistent luminous effect, each 5 metre should be connected to the power source.

To ensure long life we recommend that the strip is kept as cool as possible and environments where the temperature exceeds 40°C should be avoided

Drive & Control:

For control solutions please refer to our range of controllers and drive options which include DMX, RF Wireless, WiFi. More information may be found at <https://plusopto.com/category-led-drivers> and <https://plusopto.com/category-led-controllers>

Specifications may be subject to change without notice