



PFS5000x12-210SL5050RGB-xx

Bendable Flexible LED Strip

Features

- Flexible, bendable LED light source
- LED density 42 LEDs/metre
- High performance RGB SMD emitters
- Easy to cut at intervals
- Wide 120° angle of emission
- Low power low heat, long life
- 3M VHB Adhesive backing tape



Applications

POS Display equipment, signage, accent & decorative lighting

Configuration

Part No. series	PFS5000x12-210SL5050RGB-xx
LED's / metre	42
LED Pitch	23.8mm
Reel Size / Qty	5M/210
Strip Width No coating IP20	12.0mm


Maximum Electrical Characteristics Ta=25°C

Parameter	12VDC	24VDC	Unit
Input Voltage	12v Typical	24v Typical	VDC
Current consumption / metre (max)	833mA	416mA	mA/m
Current consumption total (max)	4.1A	2.0A	A/ TOT / reel
Power consumption / metre (max)	12.0W	12.0W	W/m
Power consumption total (max)	50W +/- 5%	50W +/- 5%	W/TOT / reel
Operating Temp	-20 to +45°C	-20 to +45°C	°C
Storage Temp	-10 to +55°C	-10 to +55°C	°C

Optical Characteristics Ta=25°C

	Wavelength	Luminous Flux Typ. (lm/M)	Viewing Angle
Red	620-625nm	300	120°
Green	520-525nm		
Blue	465-470nm		

Dimensions

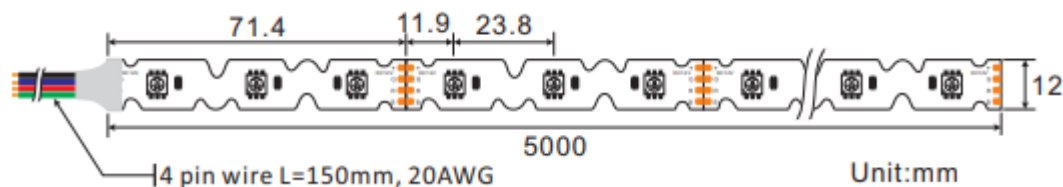

Handling notes:

Ensure that the correct low voltage dc power supply is matched to the flexible strip specification

Avoid repeated bending of the strip as this will damage the circuit and components.

Avoid handling of the surface components in particular the LED emitters as any pressure may result in damage and latent failures.

When cutting IP65 the ingress protection will be compromised please ensure that the assembly is re-sealed accordingly in order to maintain the IP rating

Installation notes:

To achieve a consistent luminous effect, each 5 metre length should be connected to the power source.

To ensure long life we recommend that the strip is kept as cool as possible and environments where the temperature exceeds 40°C should be avoided

Drive & Control:

For control solutions please refer to our range of controllers and drive options which include DMX, RF Wireless, WiFi. More information may be found at <https://plusopto.com/category-led-drivers> and <https://plusopto.com/category-led-controllers>

Specifications may be subject to change without notice