
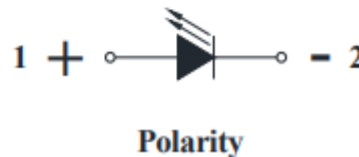

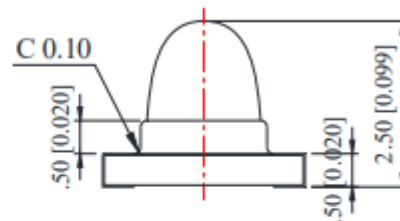


SR180 series 1210 (metric 3224) Chip LED Selector Guide

- Chip LED 1210 (metric 3224) package package.
- Top view SMD with lens
- Focussed viewing angle.
- High efficiency.
- Suitable for vapor-phase reflow, infrared reflow and wave solder processes.
- Compatible with automatic placement equipment.
- Supplied on tape and reel

Part Number	Material	Emitting Colour	λ_p (nm)	λ_d (nm)	VF (V) Min	VF (V) Max	Resin Color	2 θ 1/2 (deg)	Iv (mcd) Min	Iv (mcd) Max	IF (mA)
SR180VC-2B	AlGaInP	Super Bright Red	632	624	2.00	2.40	Water Clear	20	1000	1500	20
SR180AC-2B	AlGaInP	Super Bright Orange	610	605	2.00	2.40			1000	1500	
SR180YC-2B	AlGaInP	Super Bright Yellow	592	590	2.00	2.40			1000	1500	
SR180GC-2B	AlGaInP	Yellow Green	575	573	2.00	2.40			500	1000	
SR180PGC-G5-1B	InGaN	Pure Green	520	525	3.20	3.60			2000	4000	
SR180BC-B4-1B	InGaN	Blue	468	470	3.20	3.60			1000	1500	

Package Dimensions

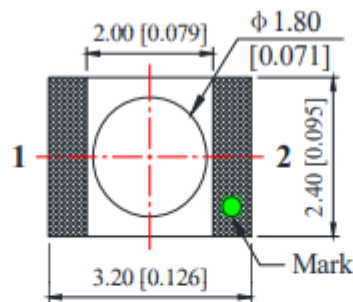

Applications

- Instrument panel backlighting
- Central console backlighting
- Switch push button backlighting
- Office automation, home appliances, industrial equipment
- Push button backlighting