


PLCC-2 3020 Mid-power Surface Mount LEDs

Selector Guide



Part No	Emitting colour	Chip		Vf(V)@20mA		Iv(lm) @150mA ***@60mA *Iv(mcd) @60mA **@150mA		Viewing angle 2Θ1/2
		Material	λD (nm) or CCT (K)	Min	Max	Min	Typ	
LURF9S53S-HC-T60	Red	AlGaInP	625	1.7	2.6	*1250	*2000	120
LUY9S53R-HC-T60	Yellow	AlGaInP	590	1.8	2.6	*2000	*2550	120
LUEL9S53-HC-T60-A01	Orange	AlGaInP	620-633	1.9	2.4	*2250	*2800	120
LDBK9S53-HC-T60	Blue	InGaN	455	2.8	3.6	*500	*800	120
LDGM9S53-HC-T150	Green	InGaN	525	2.8	3.8	**6500	**9000	120
LWK9S53-HC-T60-C-D702	Pure White	InGaN	5700	2.8	3.6	***18	***22	120
LWK9S53-HC-T150-A01	Natural White	InGaN	X:0.2655-0.2906 Y:0.2339-0.2727	2.8	3.8	16000	19500	120
LWK9S53-HC-T150-N-D803	Warm White	InGaN	X:0.367-0.4006 Y:0.3578-0.4044	2.8	3.8	50	55	120
LWK9S53-HC-T150-A01	Extra Warm White	InGaN	1920-2220	2.8	3.8	50	60	120

Dimensions

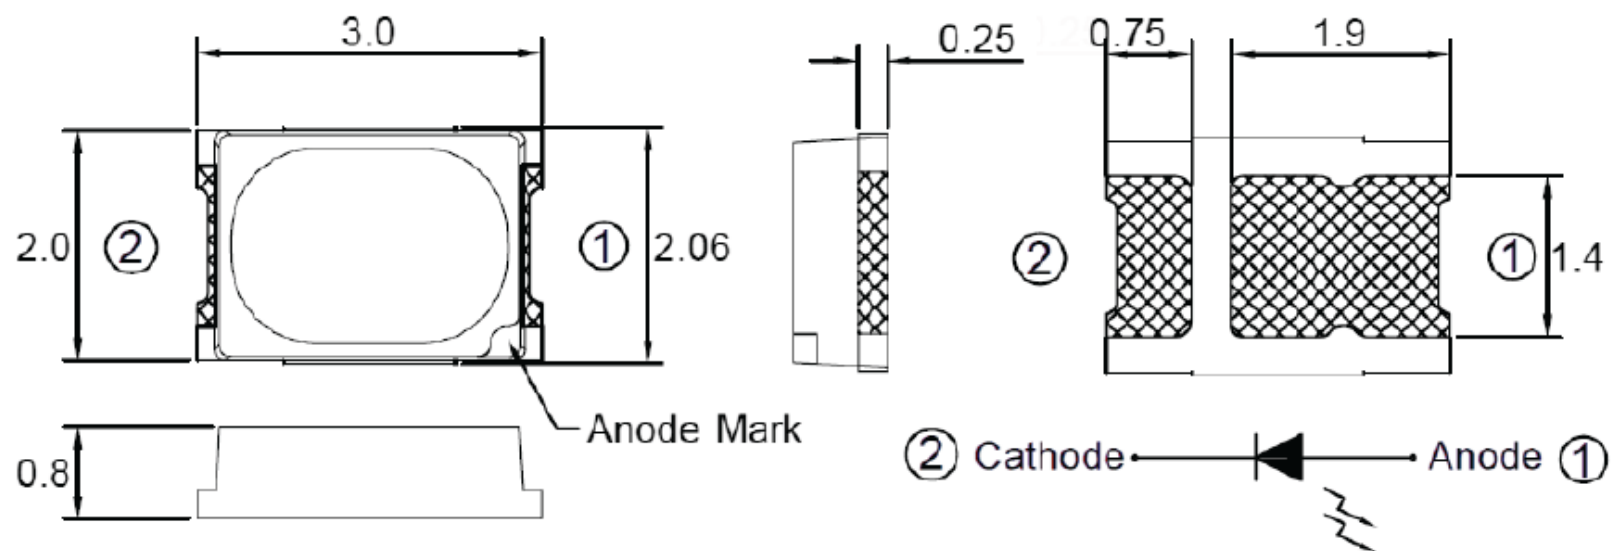

Important: This selector guide for guidance only. Contact Plus Opto for the latest detailed specifications and availability. Specifications are subject to change without notice.

Plus Opto Limited | Tel: +44 (0)1942 671122 | Email: sales@plusopto.co.uk | Web: www.plusopto.co.uk | Web: www.plusopto.com

Document reference: PO-SG-3528-PLCC2 RevA | Issue date: March 2026 | © 2026 Plus Opto Limited. All rights reserved.