

PF5000x13-60YL2835W-12W-12V

Backlighting Flexible LED Strip

Features

- High Efficient 2835 LED emitters
- Designed for backlighting. Light box 4-12cm
- Choice of Colour Temperature
- Easy to cut at 83.3mm intervals
- Wide 170° angle of emission
- Constant Voltage
- 3 Year warranty



Applications: POS Display equipment & Backlighting

Configuration

Parameter	Rating	Unit
LED emitters PLCC 2835	60 pcs 2.8x3.5mm	TOTAL / reel
	12 pcs 2.8x3.5mm	/metre
LED pitch	83.3	mm
Dimensions	5000x13mm cuttable every 1 LEDs at 83.3mm intervals	
Termination	2x Flying wire leads 200mm long	

Electrical Characteristics

Parameter		Rating	Unit
Input Voltage		12v Typical	Vdc
Current consumption / metre (max)		1.0A	mA/m
Current consumption total (max)		5.0A	A/ TOT / reel
Power consumption / metre (max)		12W	W/m
Power consumption total (max)		60W +/- 5%	W/TOT / reel
Operating Temp	-20 to +40°C (Tc@75°C max)		°C
Storage Temp	-10 to +55°C		°C


Electro-optical characteristics

Part No.	Colour	CCT typ.	Luminous Flux (lm/M) Ra>80	Viewing Angle
PF5000x13-60YL2835CW-12W-12V	Cool White	10000K	1320	170°
PF5000x13-60YL2835PW-12W-12V	Pure White	6500K	1380	
PF5000x13-60YL2835DW-12W-12V	Daylight White	5000K	1400	
PF5000x13-60YL2835NAW-12W-12V	Natural White	4000K	1440	
PF5000x13-60YL2835WW-12W-12V	Warm White	2700K	1320	

Notes:

CRI Ra.90 also available

Dimensions

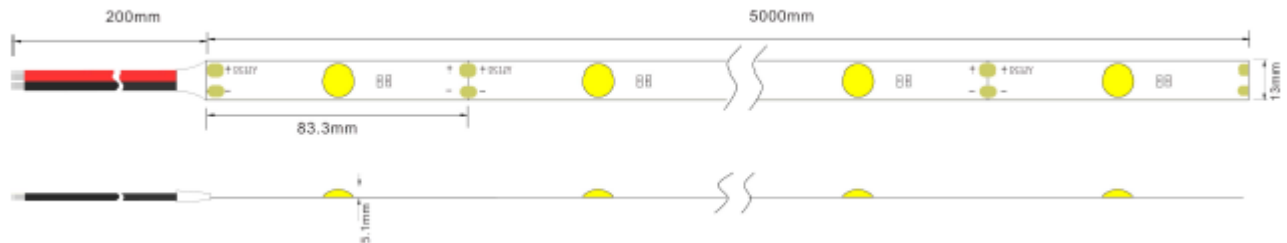

Handling notes:

Ensure that the correct low voltage dc power supply is matched to the flexible strip specification

Avoid repeated bending of the strip as this will damage the circuit and components and please observe the minimum bend radius of 30mm

Avoid handling of the surface components in particular the LED emitters as any pressure may result in damage and latent failures.

When cutting IP rated strips the ingress protection will be compromised please ensure that the assembly is re-sealed accordingly in order to maintain the IP rating

Installation notes:

To achieve a consistent luminous effect, each 5 metre should be connected to the power source.

To ensure long life we recommend that the strip is kept as cool as possible and environments where the temperature exceeds 40°C should be avoided

Drive & Control:

For control solutions please refer to our range of controllers and drive options which include DMX, RF Wireless, WiFi. More information may be found at <https://plusopto.com/category-led-controllers>

Specifications may be subject to change without notice



T +44 (0) 1942 671122 E sales@plusopto.co.uk

W plusopto.co.uk W plusopto.com

B13 Derwent Court William Way Moss Industrial Estate Leigh Lancashire WN7 3PT