

Waterproof LED Module

PWM4237-4YL5050RGB-12v/IP65



Designed for channel letter illumination in signage applications, the PWM4743-4YL2835x module is suitable for 6 ~ 18cm depth letter illumination & provides bright and even illumination. Supplied in pre-wired chains of 20 pcs with 100mm link wires. Fixing is facilitated by 3M adhesive tape and screw.

- Compact module 42x37x8.1mm
- High performance 5050RGB LED emitter
- Low voltage operation 12vdc
- Low power consumption
- Waterproof housing rated IP65
- Wide 160° angle of emission

ELECTRICAL SPECIFICATIONS

Input Voltage	12vdc
Current Consumption	160mA/module
Power Consumption	1.44W/module

LIGHTING PERFORMANCE

Efficiency	>35lm/W
Lifetime	>20,000 hours
Viewing Angle	160°

ENVIRONMENTAL

Parameter	Rating
Operating Temp	-20°C to +50°C
Storage Temp	-25°C to +60°C

MECHANICAL DETAIL


Dimensions	42x37x8.1mm
Weight	15g/module
Environmental	IP65
Approvals	CE and UL

Specifications

PART NUMBER	COLOUR	CCT	VOLTAGE	CURRENT (module)	POWER (module)	LUMINOUS FLUX (module)
PWM4237-4YL5050RGB-12v/IP65	RGB	Red	12vDC	160mA X20 =3.2A	1.44W x 20 = 28.8W	53 lm
		Green				
		Blue				

Other colours are available on request

Module Dimensions

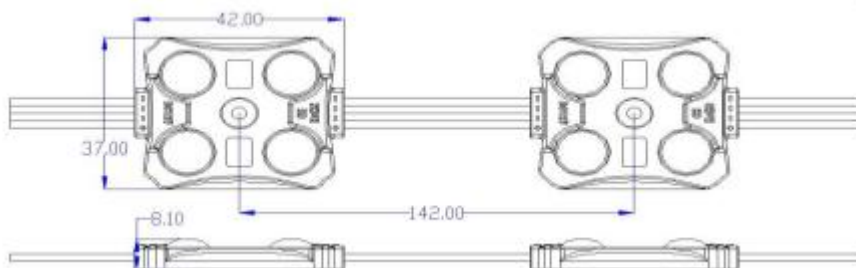

Notes:

Use in conjunction with constant voltage 12v max LED drivers

These modules are designed for low voltage operation and must not be connected directly to ac mains supply

Luminous flux values quoted are typical. Please contact our office for the latest intensity yields

Specifications may be subject to change without notice