Constant Current LED Power Supply

SDS26-700IL

Product description

SDS26-700IL is a constant current DALI dimmable led driver providing different current 160/200/250/300/350/400/450/500/550/600/650/700mA Output current can be adjustable by DIP switch, meeting DALI standard IEC62386.DALI dimming/Touch DIM（Push DIM) smooth curve、no flicker。Its input voltage 220-240Vac , with high efficiency 87%， It operates in the temperature range of-20°C~+45°C natural cooling and cooling casing, and has ultra-high power factor, ultra-low total harmonic distortion, low standby power consumption and comprehensive protection functions. It not only greatly improves product reliability, but also ensures product life cycle.

Standards

EN61347-1:2015
EN 61347-2-13:2014+A1
AS/NZS61347.2.13
EN 61347-2-13:2014 +A1
EN61347-1:2015
IEC62386

Characteristics

- 12 level current dip switch
- with PFC function
- IP20
- suitable for indoor light,eg down light,spot light
- 0-100% full dimming, no visible flicker,4K frequency PWM dimming,
- meet DALI standard IEC62386

www.snappy.cn
Last update: 1 MAR, 2023

Specifications

Model		SDS26-700IL
Output	turn on time(S)	<0.7
	output power(W)	26
	output voltage(V)	20-50
	output voltage tolerance	≤±8%
	ripple voltage(mA)	5%
	Line Regulation	±5%
	Load Regulation	±5%
	working current range(A)	0.16-0.7
	SVM	≤0.4
	Pst	≤1
	dimming type	DALI2.0
	dimming range	1-100%
Input	rated DC supply voltage(Vdc)	-
	rated supply voltage(Vac)	220-240
	voltage range(Vac)	198-264
	line frequency(Hz)	50/60
	input current(A)	0.15
	efficiency	≥87%@full load
	average efficiency 3	86%
	no load power consumption(W)	≤0.5W
	power factor	0.95@full load
	Displacement factor	0.95
	THD(typ.) THD	10
	inrush current(Ipk)	25A
	Leakage current	5mA
	short circuit protection	hiccup mode, restart automatically after fault correction.

Protection	Over voltage protection	-
	Over temperature protection	
	surge capacity	L-N: 1KV
	Withstand voltage	Input-Output：3750V/5mA/1min
Ambient and Life	Ta(C)	-20…45
	Tc max.(C)	max.80
	Storage Temperature(C)	-40...85
	ambient humidity range	10%...90%RH, Not condensing
	nominal life-time(hrs)	50'000@Tc
Other	dimensions (L×W×H)(mm)	138*42*25
	weight(g)	110g
	casing material	Plastic
	housing colour	White
	type of protection	IP20
	protection class	class II
	certificate	
Note	1.Tolerance:includes set up tolerance, line regulation and load regulation. 2.Tested at full load,230Vac.Refer to"Power Factor" and "EFFICIENT"curve graphs. 3.Calculate the model's average efficiency for each test voltage by testing at 100%, 75%, 50%, and 25% of rated current and then computing the simple arithmetic average of these four values. 4.All parameters NOT specially mentioned are measured at nominal voltage input, rated load and 25 of ambient temperature. 5.The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.	

DIMENSIONS(mm)

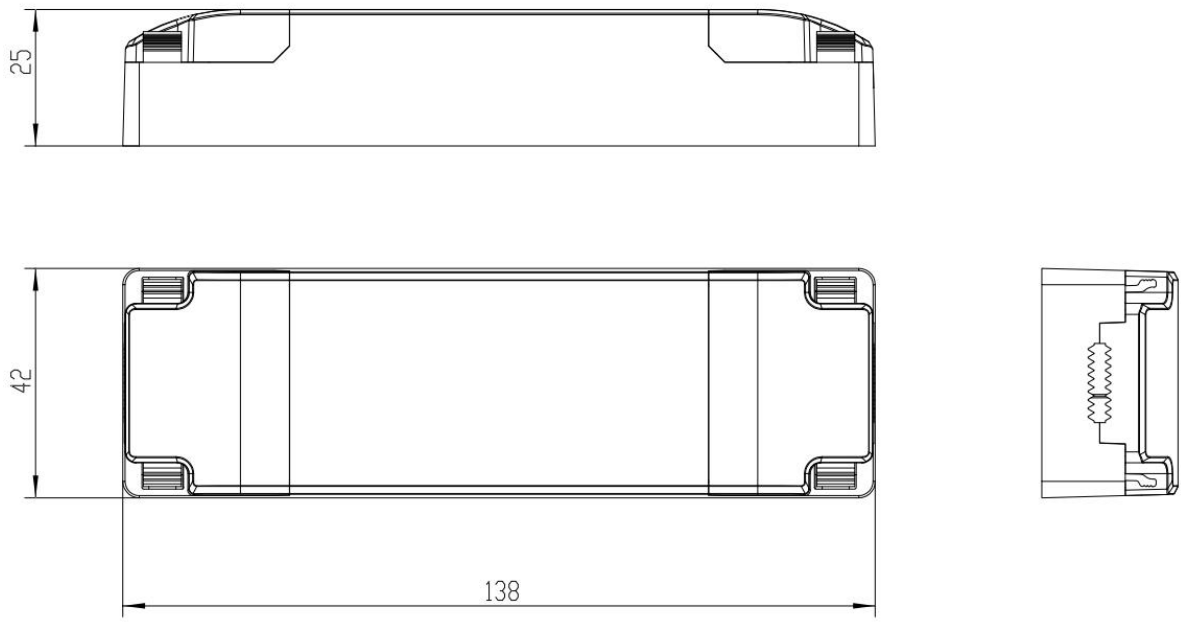

Wiring Diagram

DALI wiring diagram

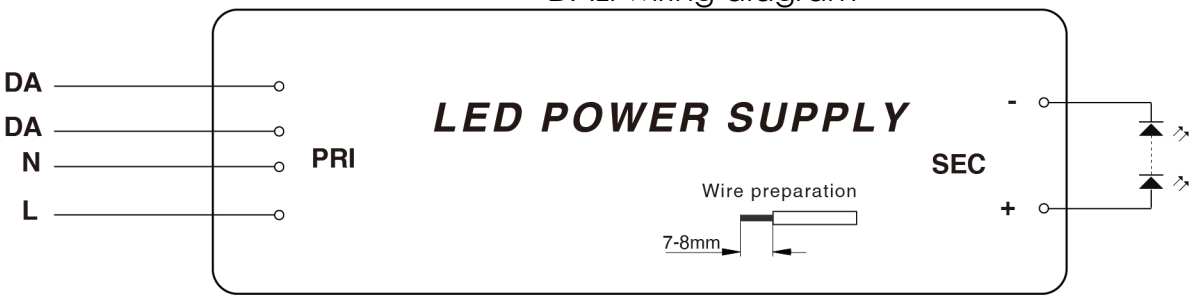

Push DIM wiring diagram

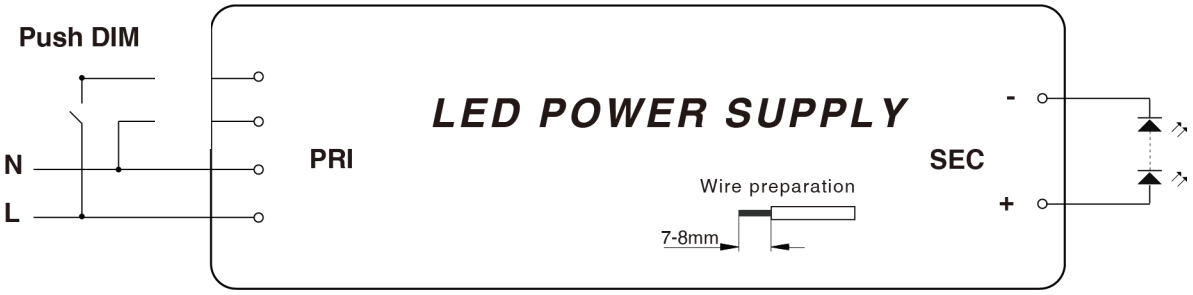

AC	H03VVH2-F 2*0.75—1.5mm2
DALI	H03VVH2-F 2*1.5mm2
DC	H03VVH2-F 2*0.75mm2

Wire diagram：put DALI interface to 50/60HZ AC100~300V，put driver L,N to the DALI interface through resect switch

Short press：press the resect switch quickly and release ,the button automatically returns to disconnected state, press the button for 40~500ms；

Long press：Quickly press the reset button without release ,duration＞500ms；

NO.	function	operation	remark
1	memory	Turn on	Push mode，LED driver turn on, will have memory before shutdown； If it is stand by statement before turn off, it will be stand by after turn on, it defaults to max bright after short press
2	Turn on/off	Short press	If the light is bright, it will turn off after short press, if the light is off, it will turn on after short press, the brightness is the same as the status before light turn off
3	dimming	Long press	Long press the resect switch, it goes into dimming situation, long press > 500ms, it starts changing ； If the previous status is dimming to bright, the next one status is dimming to dark, release the resect switch, dimming stop, keep the previous brightness ； 1%~100% Gradient time is 3 S If long press under turn off status, the brightness will change from MIN to MAX；
4	synchronization	Long press >10S	Long press >10S，it turns to 100% output, use for multiple lamp synchronization

DIP switch settings

PIN				Iout	Vout
1	2	3	4	mA	
ON	**ON**	OFF	OFF	160	30-50
OFF	OFF	**ON**	OFF	200	30-50
ON	OFF	**ON**	OFF	250	20-50
OFF	**ON**	**ON**	OFF	300	20-50
ON	**ON**	**ON**	OFF	350	20-50
ON	OFF	OFF	**ON**	400	20-50
OFF	**ON**	OFF	**ON**	450	20-50
ON	**ON**	OFF	**ON**	500	20-50
OFF	OFF	**ON**	**ON**	550	20-47
ON	OFF	**ON**	**ON**	600	20-43
OFF	**ON**	**ON**	**ON**	650	20-40
ON	**ON**	**ON**	**ON**	700	20-38

Electrical curves

Fig. 1 Output load-Temperature curve

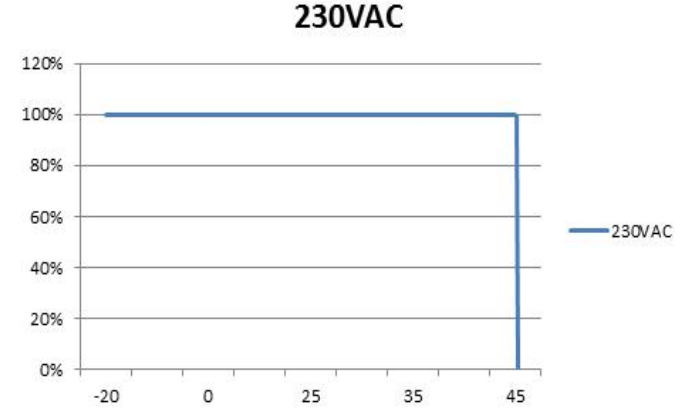

Fig. 2 Static characteristic curve

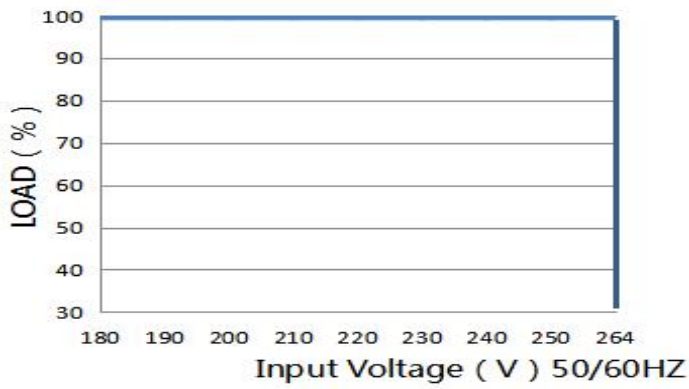

Fig. 3 Dimming curve

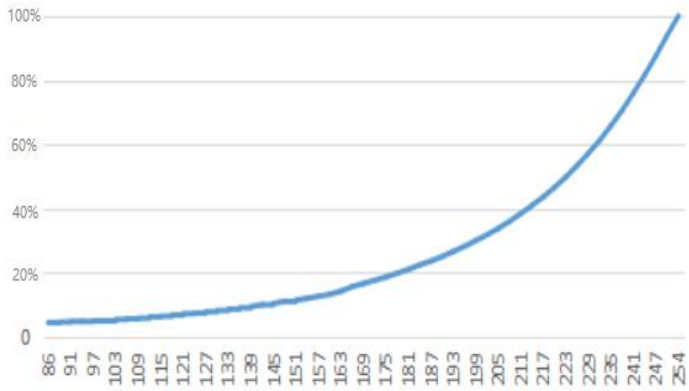

Fig. 4 Power factor characteristic curve

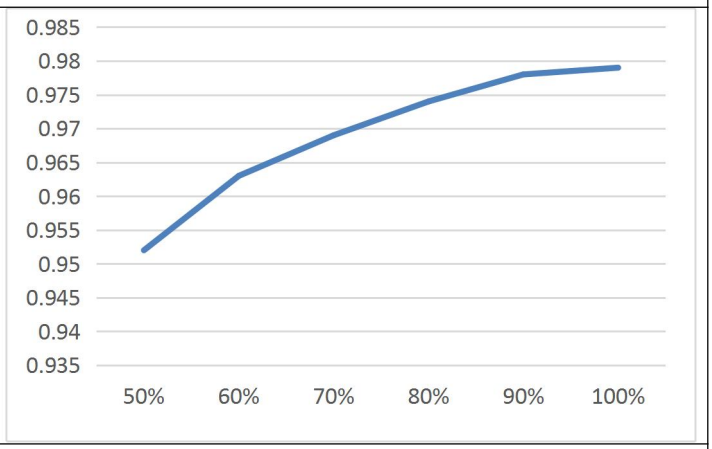

Fig.5 Total harmonic distortion curve（THD）

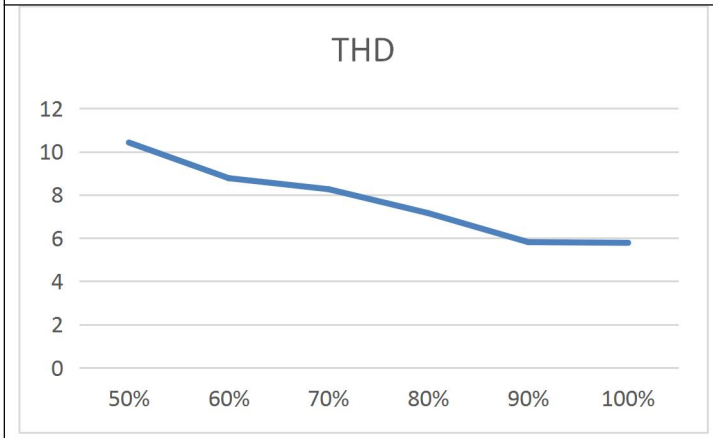

Fig.6 Efficiency-Load curve

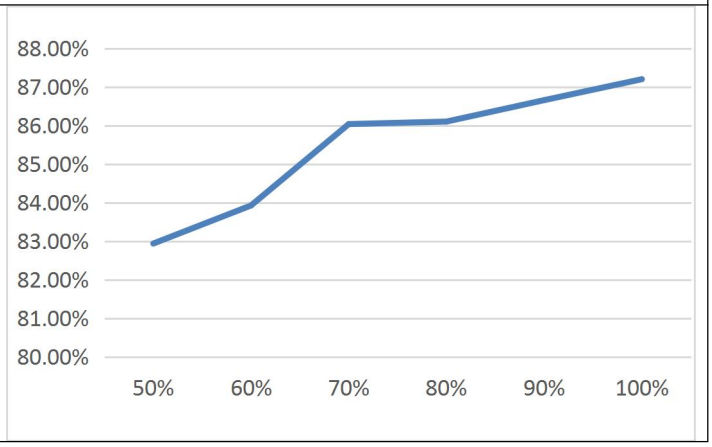

MCBS

MCBS / Model	B10	B13	B16	B20	C10	C13	C16	C20
SDS26-700IL	18	25	30	39	32	42	52	64

Package

Model	Carton quantity(pcs)	Carton dimension(mm)	G.W./CTN(kg)
SDS26-700IL			

Revision history

Date	Rev.	Remark
2023.3.22	V0.01	Initial release.
2023.6.15	V0.02	Official release
2023.10.25	V0.03	Change dimming range from 0-100% to1-100%