
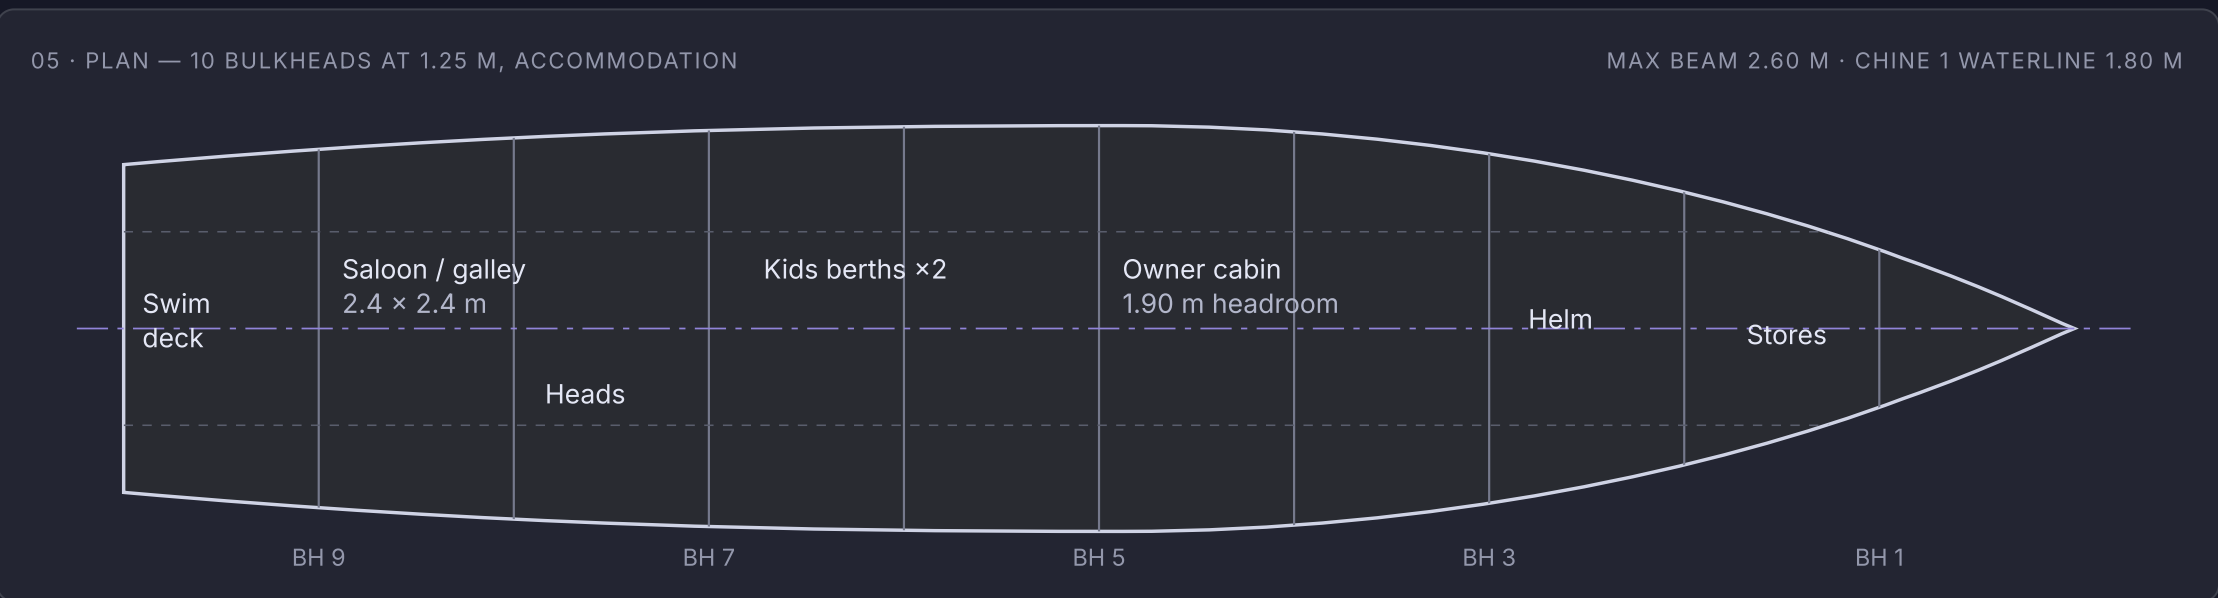
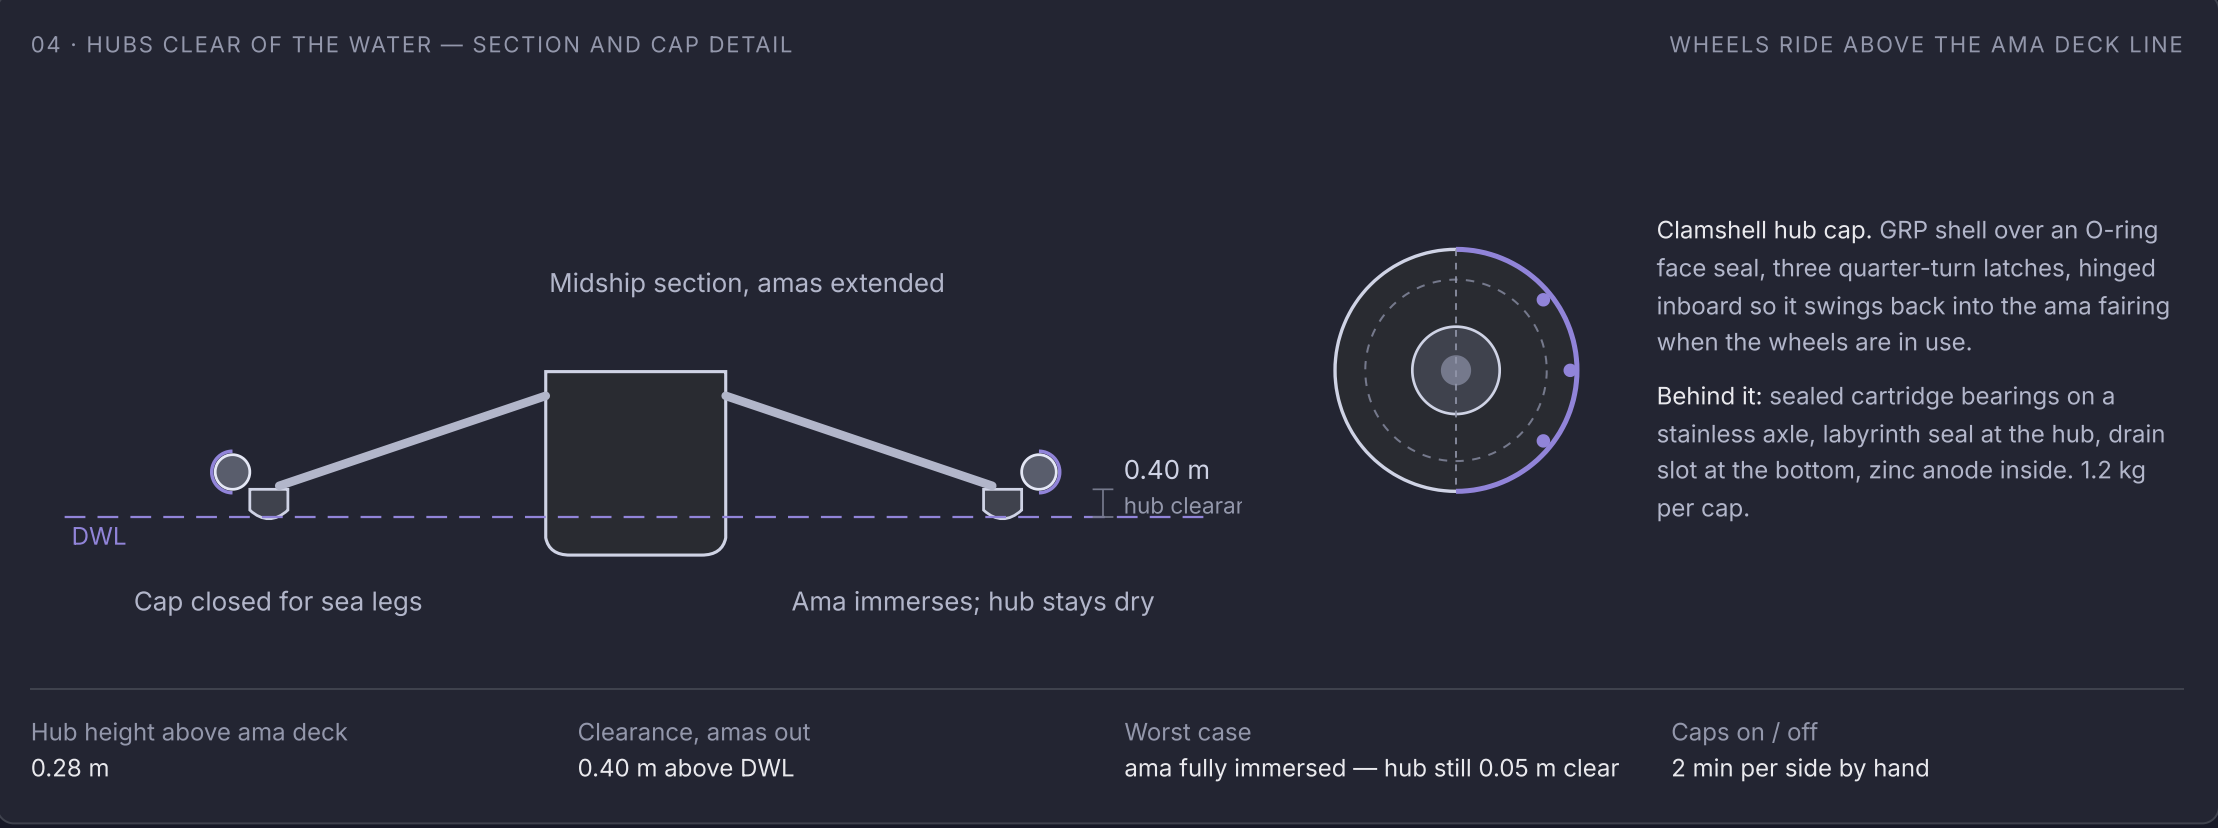
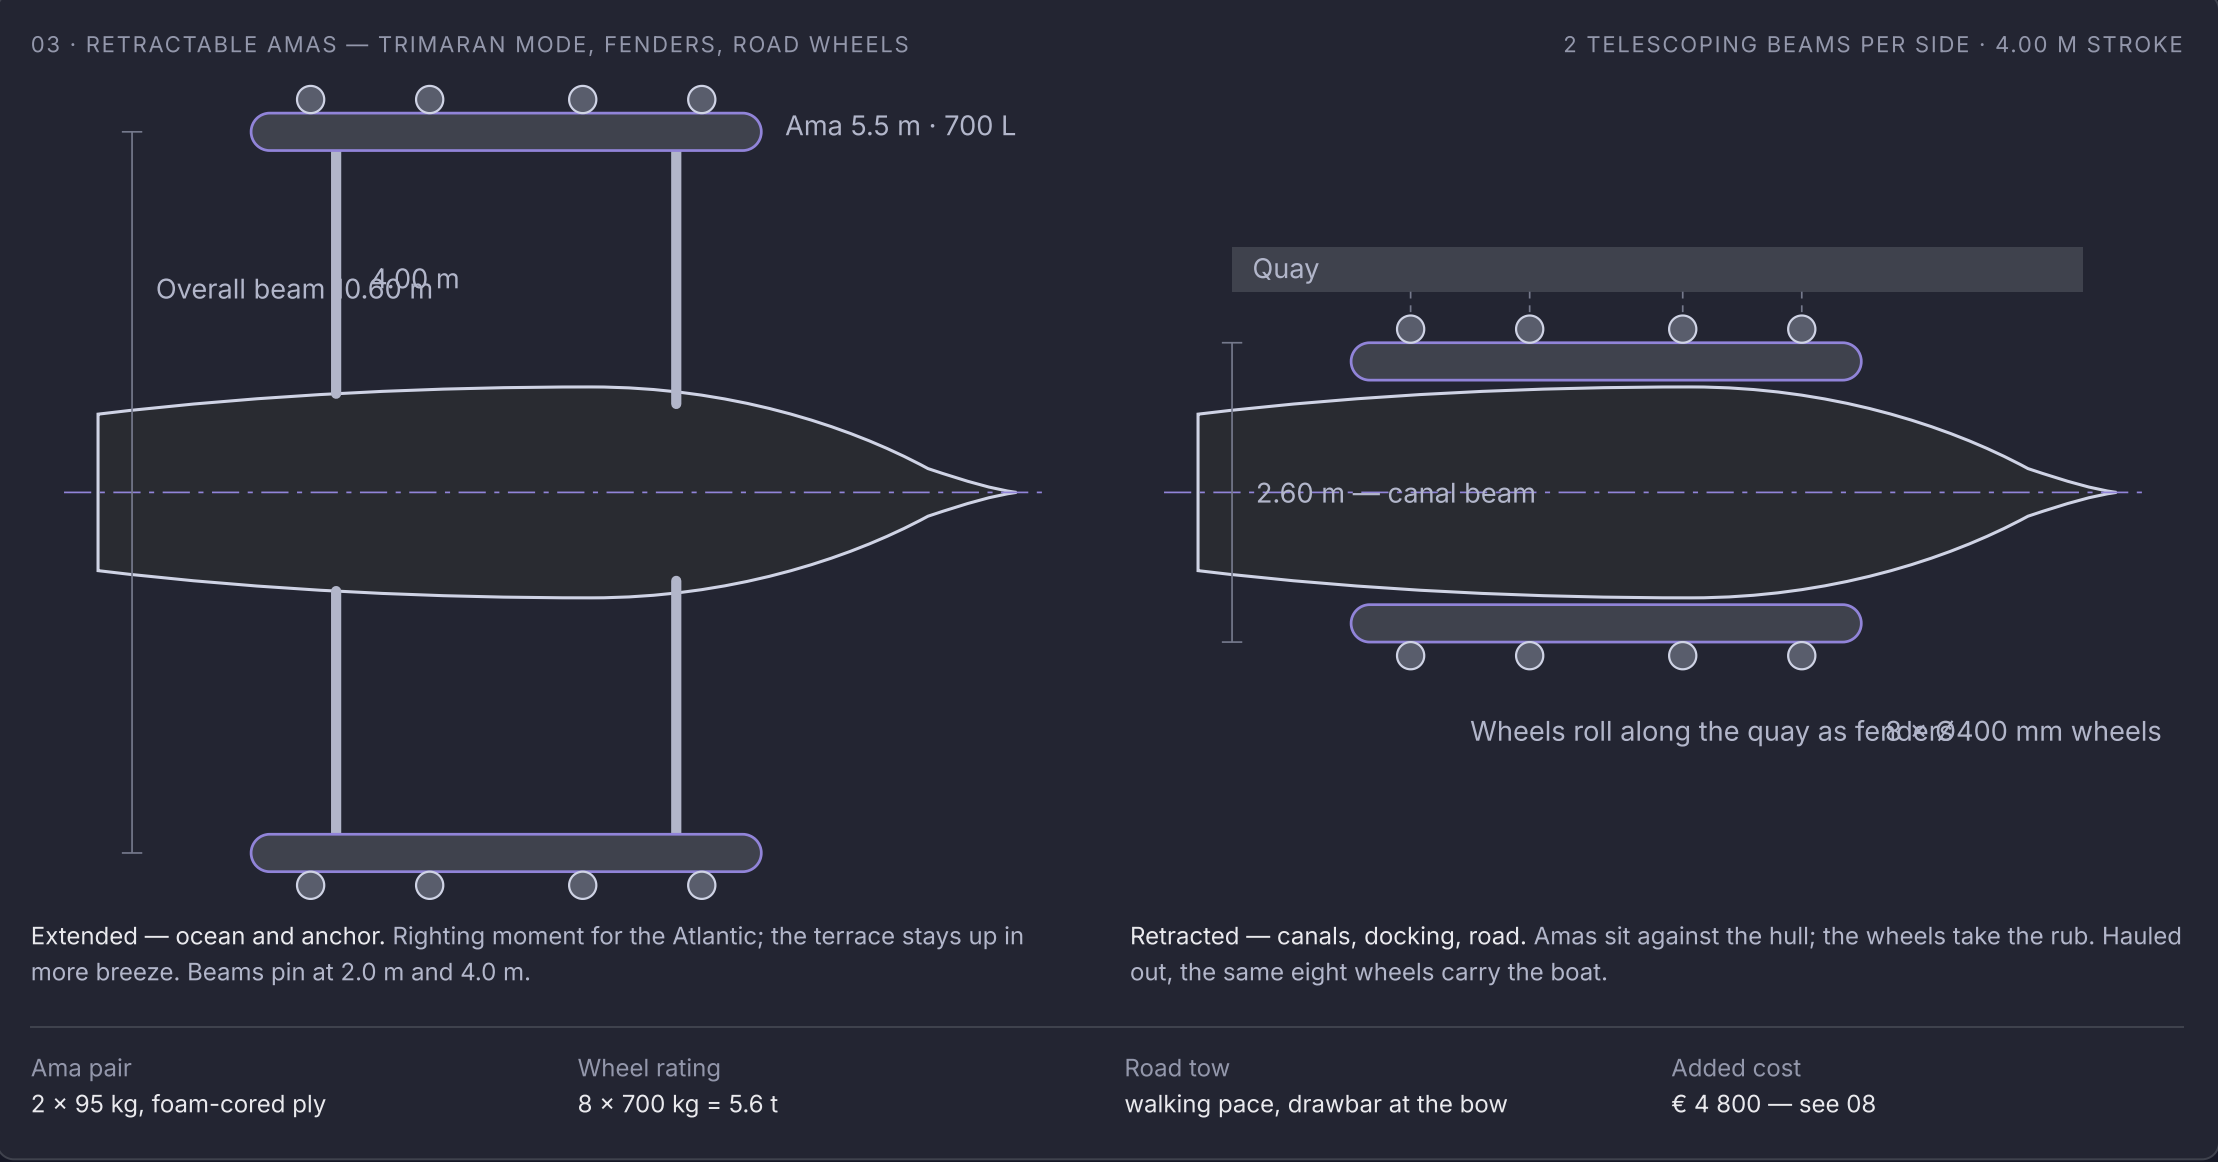
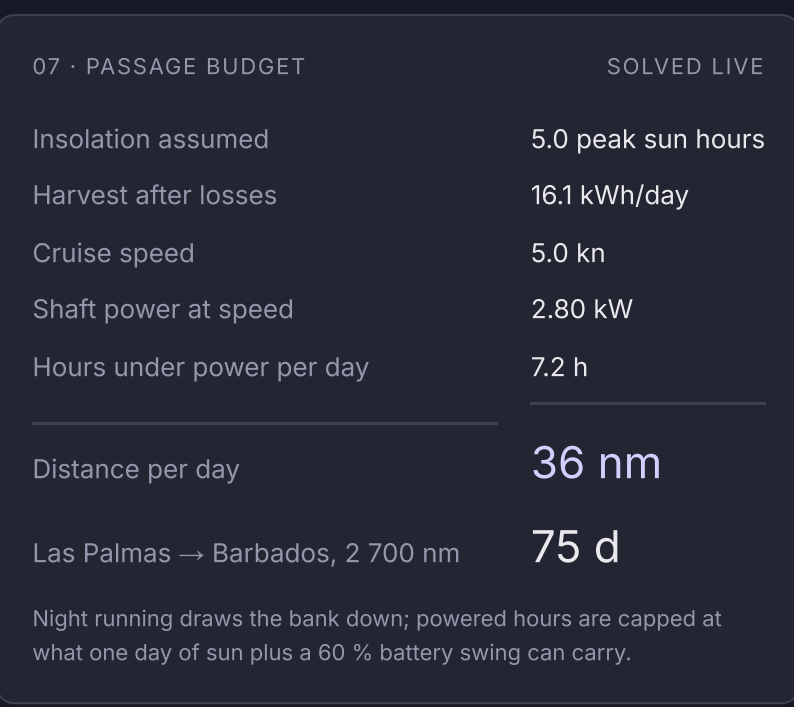
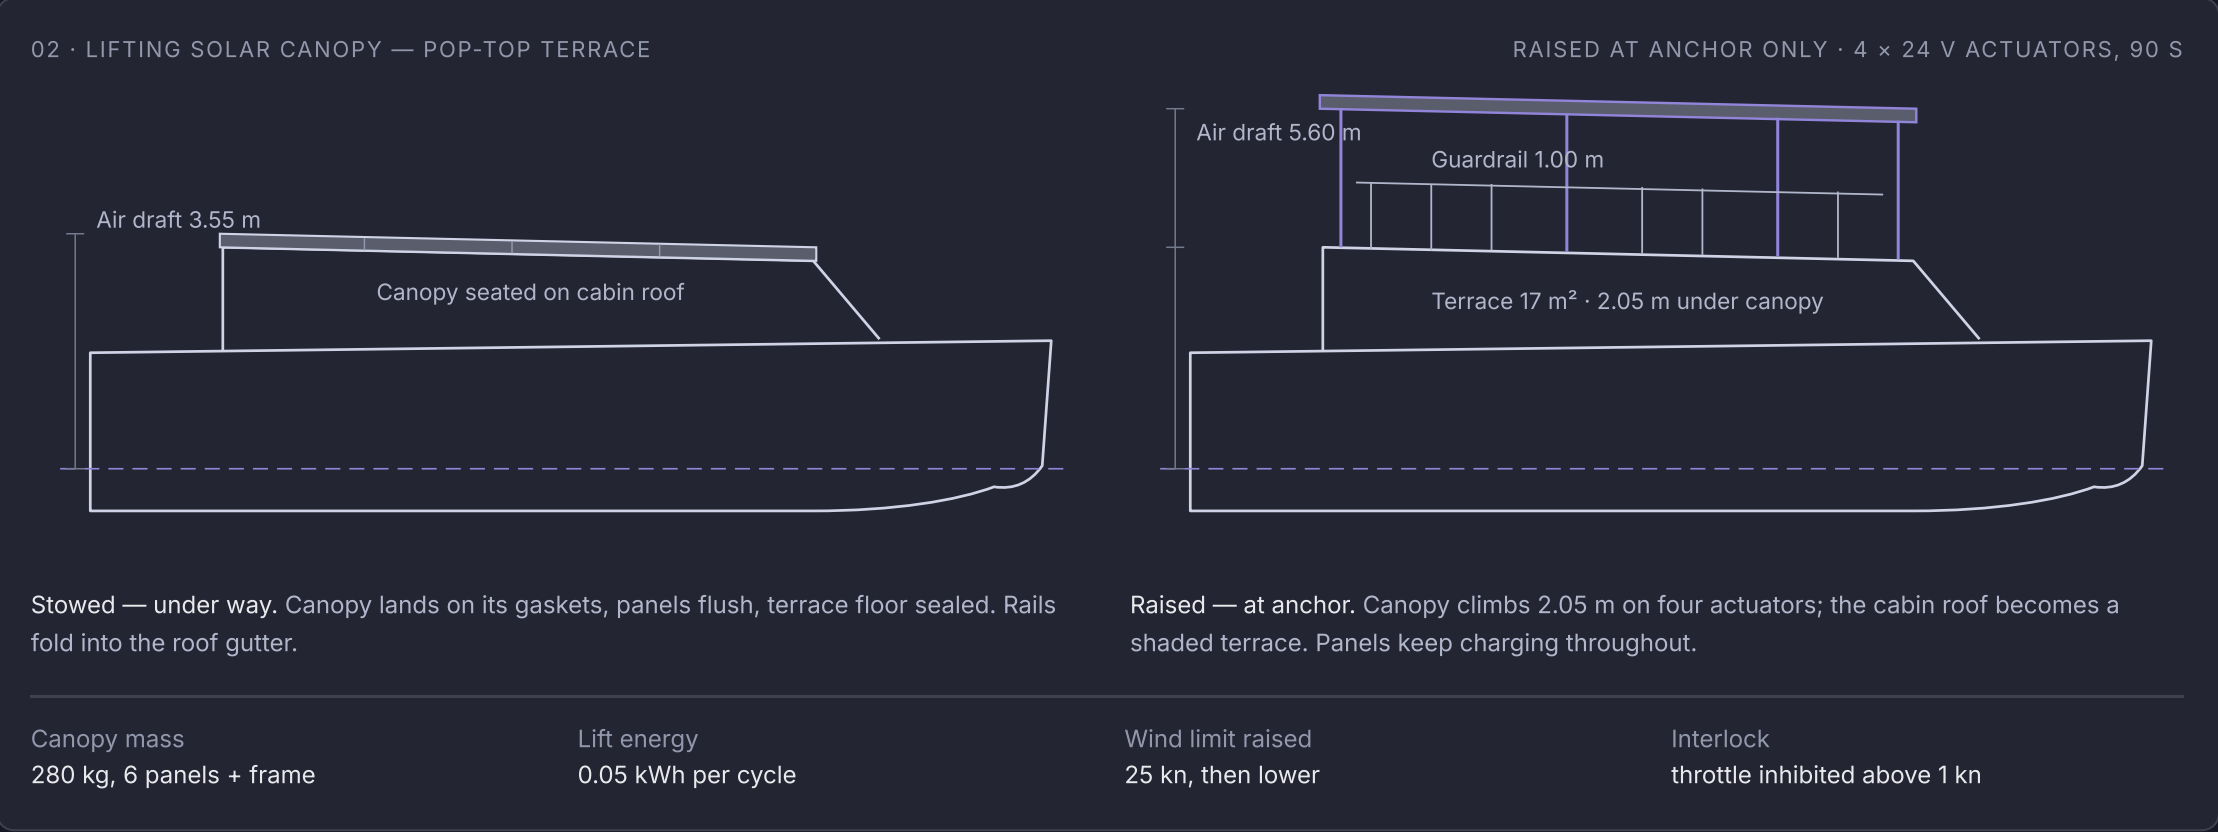
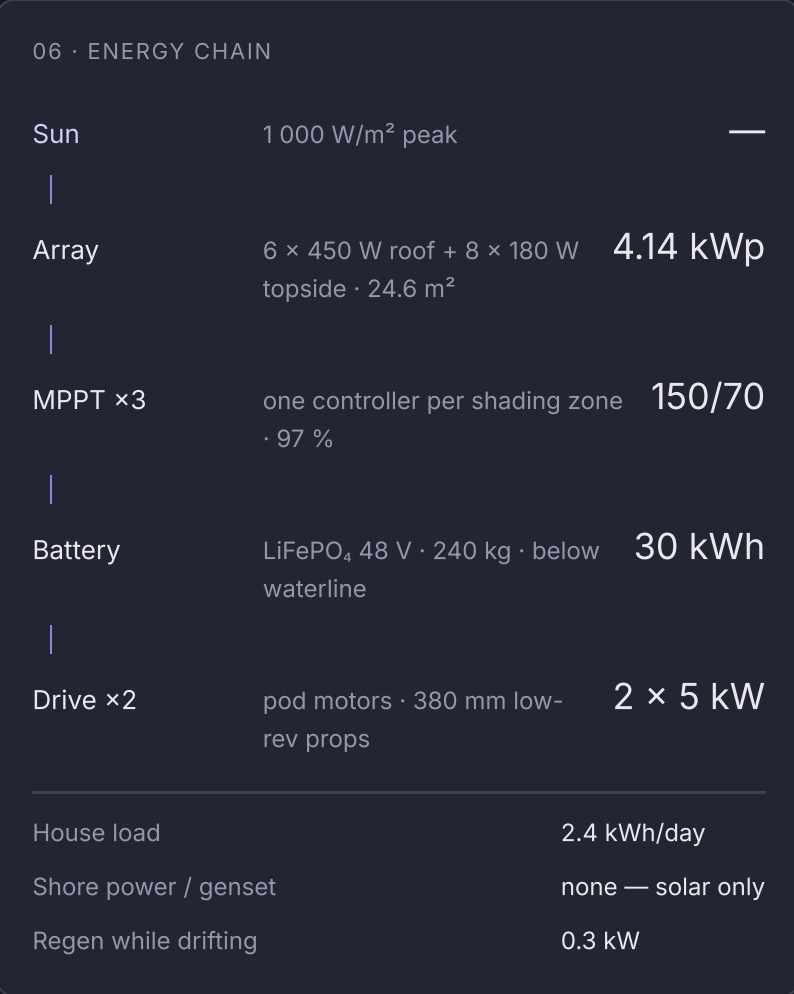


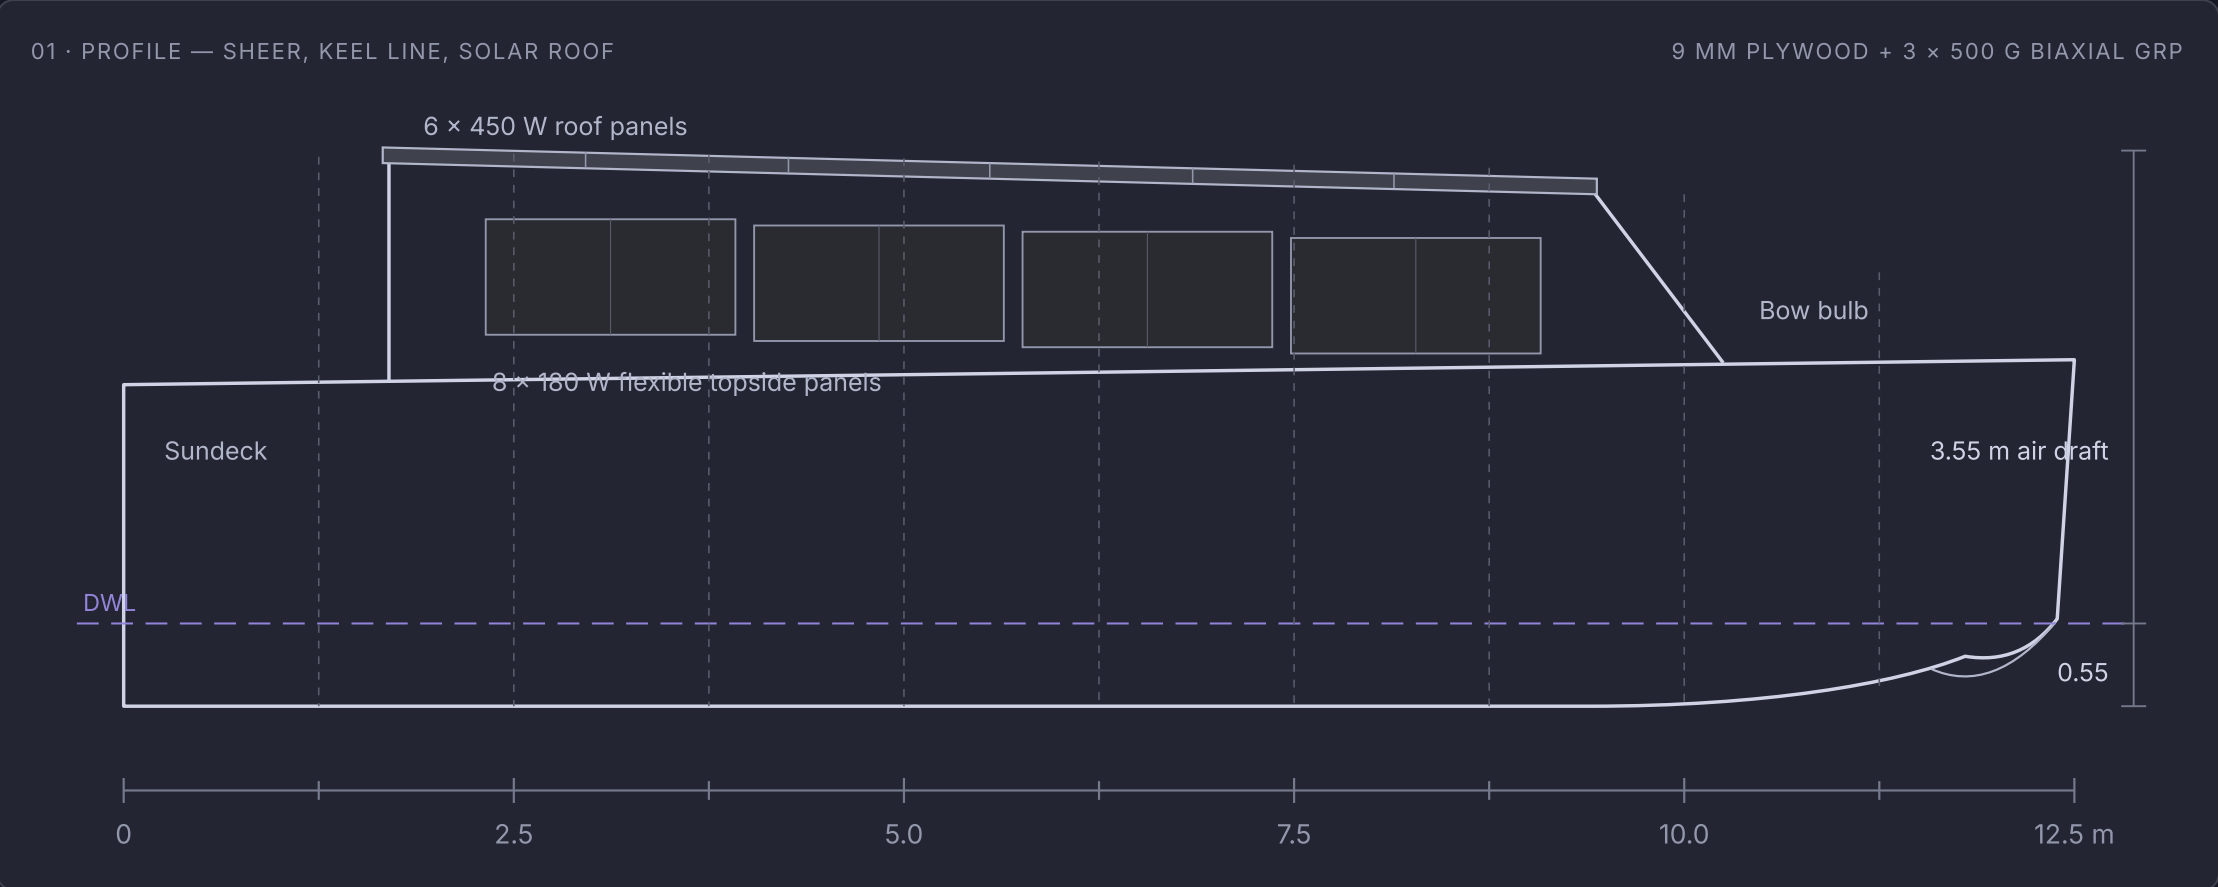

09 · REFERENCE IMAGERY

Canopy raised at anchor — terrace occupied, amas extended
or [browse files](#)

Alongside a stone quay — wheels rolling as fenders
or [browse files](#)

Hauled out on its own eight wheels
or [browse files](#)

A · At anchor. Three-quarter aerial, canopy up on its four posts, guardrails rigged, amas out on the water, turquoise anchorage.

B · Docked. Eye-level detail of one ama pressed to a canal wall, caps off, two wheels bearing on the stone, canopy stowed flush.

C · On land. Stern-quarter view on a slipway, amas retracted and dropped, all eight wheels loaded, drawbar at the bow.

Canals	Ocean	Open risks	Next
Draft 0.55 m and 3.55 m air draft stowed clear Freycinet locks and most fixed bridges. The canopy only rises once moored.	Amas out for 10.60 m of beam, bulb bow, ballast below the waterline. Watertight bulkheads 1, 3 and 9. Sea anchor and storm hatch covers.	Beam-to-hull joint fatigue at 4 m of leverage. Cap seal integrity after a knockdown. Panel survival in green water. One MPPT flooding.	Beam root loads at full extension. Terrace floor stiffening. Resistance with amas in the water. Weight schedule per bulkhead.